



Characters

- Chip LED (3.2x2.7x1.1)
- Super compact type
- Bi-color





Package Outline Dimensions

(Unit:mm Tolerance:+/-0.1)

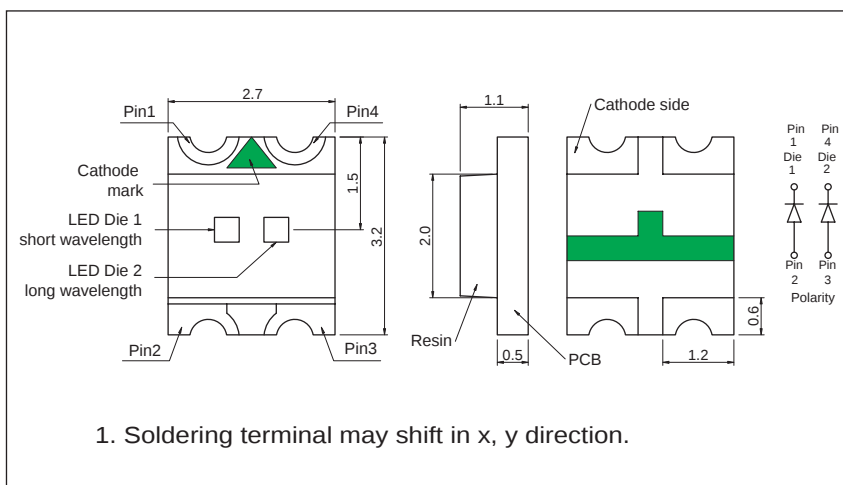


Directive Characteristics

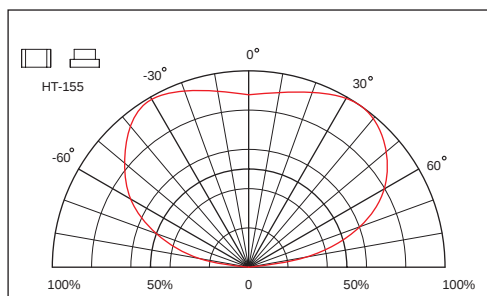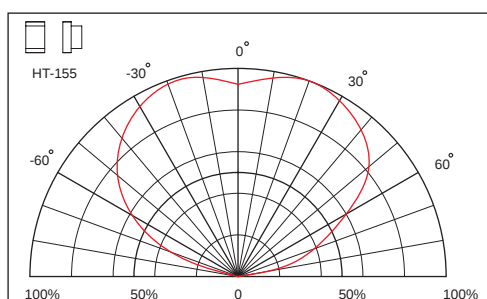

Recommended Soldering Pattern

Unit: mm

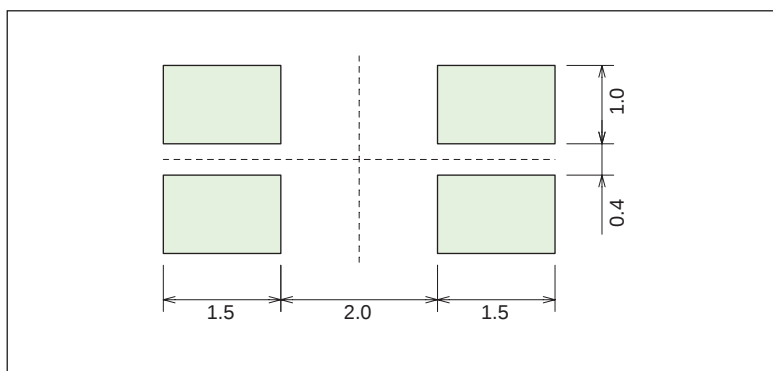

Absolute Maximum Ratings

(Ta=25 °C)

Item	Symbol	Value				Unit
		GaP	GaAsP	AlInGaP	InGaN	
Power Dissipation	P _D	65	65	72	80	mW
DC Forward Current	I _F	25	25	30	20	mA
Pulsed Forward Current	I _{FP} *	100	100	100	80	mA
Reverse Voltage (I _R =100uA)	V _R	5				V
Operating Temperature	T _{OP}	-30 to 80				°C
Storage Temperature	T _{ST}	-40 to 85				°C

*Condition for I_{FP} is pulse of 1/10 duty and 0.1msec width

Electrical-Optical Characteristics

(Ta=25 °C)

Code for parts	Lighting Color	Material	Forward Voltage (V)		Wavelength (nm) typ			Luminous Intensity (mcd)*		I _F (mA)
			typ	max	λ _D	λ _P	Δλ	min	typ	
HT-155SD/YG	Super Bright Orange	GaAsP	2.1	2.6	629	642	35	4	10	20
	Yellow Green	GaP	2.2	2.6	573	568	30	6.3	14	20
HT-155Y/YG	Yellow	GaAsP	2.1	2.6	590	589	35	2.5	8	20
	Yellow Green	GaP	2.2	2.6	573	568	30	6.3	14	20
HT-155D/YG	Amber	GaAsP	2.1	2.6	608	610	35	2.5	8	20
	Yellow Green	GaP	2.2	2.6	573	568	30	6.3	14	20

Code for parts	Lighting Color	Material	Forward Voltage (V)		Wavelength (nm) typ			Luminous Intensity (mcd)*		I _F (mA)
			typ	max	λ _D	λ _P	Δλ	min	typ	
HT-155USD/UYG	Ultra Bright Orange	AlInGaP	1.9	2.4	622	636	17	25	60	20
	Ultra Bright Yellow Green	AlInGaP	2.0	2.4	573	574	20	25	40	20
HT-155UY/UYG	Ultra Bright Yellow	AlInGaP	1.9	2.4	591	593	15	25	60	20
	Ultra Bright Yellow Green	AlInGaP	2.0	2.4	573	574	20	25	40	20
HT-155UD/UYG	Ultra Bright Amber	AlInGaP	1.9	2.4	605	609	17	25	60	20
	Ultra Bright Yellow Green	AlInGaP	2.0	2.4	573	574	20	25	40	20

Code for parts	Lighting Color	Material	Forward Voltage (V)		Wavelength (nm) typ			Luminous Intensity (mcd)*		I _F (mA)
			typ	max	λ _D	λ _P	Δλ	min	typ	
HT-155USD/NB	Ultra Bright Orange	AlInGaP	1.9	2.4	622	636	17	25	60	20
	Blue	InGaN	3.3	3.9	470	468	40	25	40	20
HT-155UY/NB	Ultra Bright Yellow	AlInGaP	1.9	2.4	591	593	15	25	60	20
	Blue	InGaN	3.3	3.9	470	468	40	25	40	20
HT-155UD/NB	Ultra Bright Amber	AlInGaP	1.9	2.4	605	609	17	25	60	20
	Blue	InGaN	3.3	3.9	470	468	40	25	40	20

*Per NIST standards