High temperature accelerometer

HT787A

SPECIFICATIONS


Sensitivity, ±5%, 25°C		100 mV/g	
Acceleration range, VDC > 25 V		80 g peak	
Amplitude nonlinearity		1%	
Frequency response:	**±10%**	1.0 - 5,000 Hz	
	±3 dB	0.5 - 10,000 Hz	
Resonance frequency, nominal		22 kHz	
Transverse sensitivity, max		5% of axial	
Temperature response:	**–25°C**	–10%	
	+150°C	+15%	
Power requirement:			
Voltage source		18 - 30 VDC	
Current regulating diode		2 - 10 mA	
Electrical noise, equiv. g:		**25°C**	**150°C**
Broadband	**2.5 Hz to 25 kHz**	700 µg	1,100 µg
Spectral	**10 Hz**	10 µg/√Hz	14 µg/√Hz
	100 Hz	5 µg/√Hz	7 µg/√Hz
	1,000 Hz	5 µg/√Hz	7 µg/√Hz
Output impedance, max		100 Ω	
Bias output voltage:	**+25°C**	13 VDC	
	+150°C	12 VDC	
Grounding		case isolated, internally shielded	
Temperature range		–50° to +150°C	
Vibration limit		500 g peak	
Shock limit		5,000 g peak	
Electromagnetic sensitivity, equiv. g, max		70 µg/gauss	
Sealing		hermetic	
Base strain sensitivity, max		0.0002 g/µstrain	
Sensing element design		PZT, shear	
Weight		145 grams	
Case material		316L stainless steel	
Mounting		1/4-28 captive screw	
Output connector		2 pin, MIL-5015 style	
Recommended cabling		J9F / J9T2A	


Accessories supplied: 1/4-28 captive screw (metric mounting available); calibration data (level 2)




Key features

- 150°C operation
- Built with extended range components for long-lasting operation
- Manufactured in ISO 9001 facility

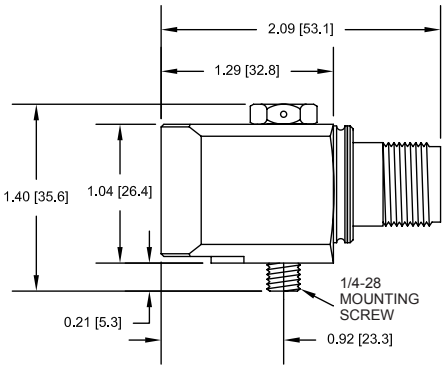

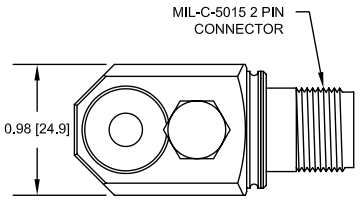



Connections	
Function	Connector pin
power/signal	A
common	B
ground	shell

Note: Due to continuous process improvement, specifications are subject to change without notice. This document is cleared for public release.

Wilcoxon Sensing Technologies
An Amphenol Company

8435 Progress Drive
Frederick, MD 21701
USA

Tel: +1 (301) 330-8811
Fax: +1 (301) 330-8873
info@wilcoxon.com

buy.wilcoxon.com
www.wilcoxon.com

99197 Rev.B.3 01/20