
Major League Electronics .050" cl x .050" cl Insulation Displacement Socket

Pins Per Row	Dimension	
	A	B
3	.315 [8.00]	.100 [2.54]
4	.365 [9.27]	.150 [3.81]
5	.415 [10.54]	.200 [5.08]
6	.465 [11.81]	.250 [6.35]
7	.515 [13.08]	.300 [7.62]
8	.565 [14.35]	.350 [8.89]
9	.615 [15.62]	.400 [10.16]
10	.665 [16.89]	.450 [11.43]
13	.815 [20.70]	.600 [15.24]
14	.865 [21.97]	.650 [16.51]
15	.915 [23.24]	.700 [17.78]
17	1.015 [25.78]	.800 [20.32]
20	1.165 [29.59]	.950 [24.13]
22	1.265 [32.13]	1.050 [26.67]
25	1.415 [35.94]	1.200 [30.48]
26	1.465 [37.21]	1.250 [31.75]
30	1.665 [42.29]	1.450 [36.83]
32	1.765 [44.83]	1.550 [39.37]

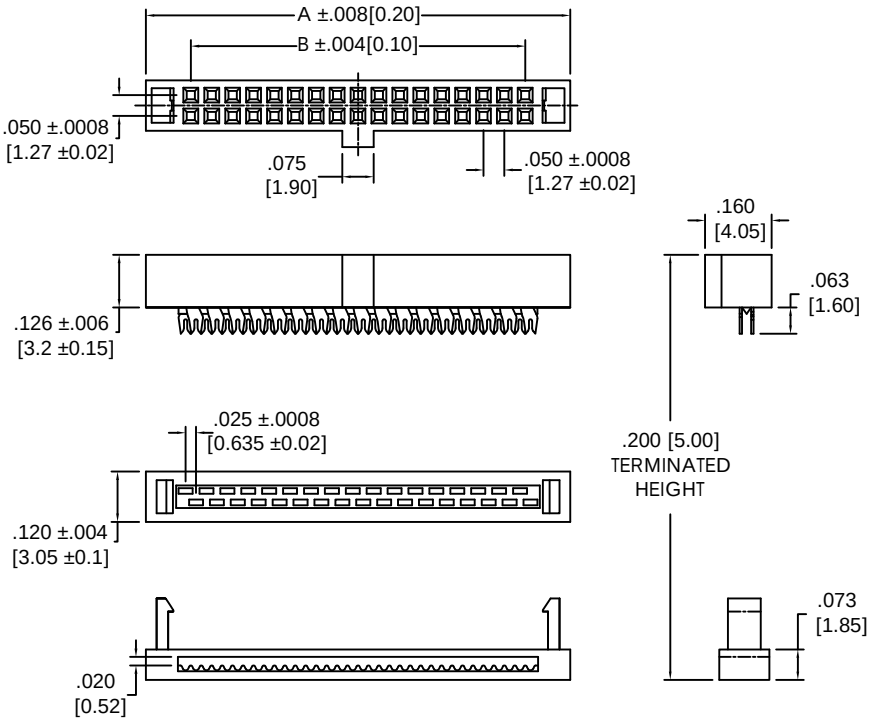

Tails may be clipped to achieve desired pin length

Ordering Information

IDS-5 XX - D - 02 - F - 02 - LF

Pins Per Row
only available in:
03, 04, 05, 06, 07, 08, 09, 10, 13
14, 15, 17, 20, 22, 25, 26, 30, 32

Double

Style
02 = Black

Options
02 = Without Strain Relief

Lead Free

Plating Options	
- Gold Flash Over Entire Pin	F

Insulator	PBT, glass reinforced, rated UL 94V-0, Black	Current Rating	1 A AC/DC
Contact	Phosphor Bronze, Gold Plated over Nickel	Dielectric Withstanding	500V AC Min.
Insulation Resistance	100 MΩ min.	Operating Temperature	-40°C to +105°C
Contact Resistance	20 mΩ max.	Terminated with	.025" [.635mm] pitch flat ribbon cable
Voltage Rating	250V AC/DC		

Only for cable assemblies, not to be sold separately

Products cut to specific sizes are uncancellable/nonreturnable
Parts are subject to change without notice

IDS-5 SERIES | .050" cl x .050" cl Insulation Displacement Socket | 21 APR 11 | Scale NTS

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)
TOLERANCES ARE:

ONE PLACE DECIMALS ±.014
TWO PLACE DECIMALS ±.012
THREE PLACE DECIMALS ±.010

ANGLES: ±2°

Major League ELECTRONICS
4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)
Tel: 812-944-7244
Fax: 812-944-7268
E-mail: mle@mlelectronics.com
Web: www.mlelectronics.com

Revision A

Sheet 1/1