
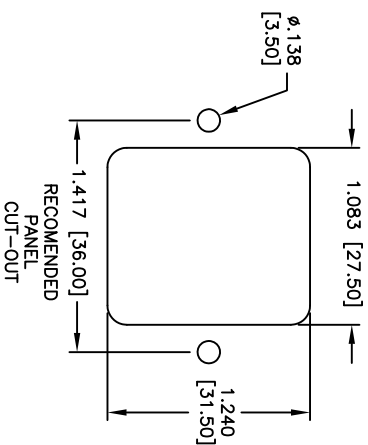

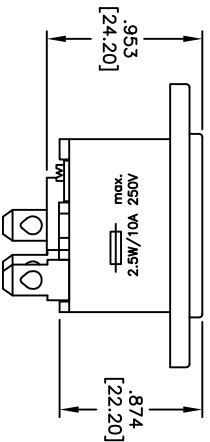
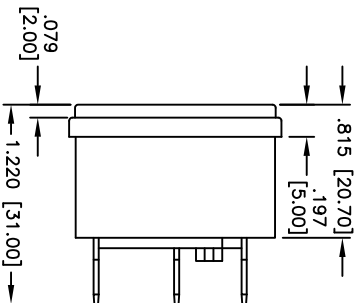


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	09/22/04	
A		REVISED MARK	2/24/10	

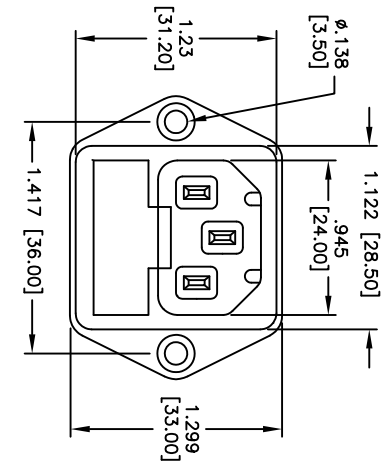

SPECIFICATIONS:

Material: Insulator: Polycarbonate or Nylon 66, glass filled, rated UL94V-0
Insulator Color: Black
Contacts: Phosphor Bronze or Brass
Plating: Nickel over copper underplate.
Electrical: Operating Voltage: 250V AC
Current Rating: UL & CSA: 15 Amps Max,
VDE: 10 Amps Max.
Insulation Resistance: 100 MΩ Min. @ 500V DC
Dielectric Withstanding Voltage: 2000V AC for 1 Minute
Temperature Rating: Operation Temperature: -25°C ~ +70°C



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

IEC connector, F body, .187 Quick

Connect terminals

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES Holes .X ± .10 .XX ± .020 .XXX ± .015				DATE			
APPROVALS				DATE			
DRAWN	BAS	09/22/04					
CHECKED							
APPROVED							
TITLE		IEC connector, F body, .187 Quick					
SIZE		PART NO.					
X		IEC-F-1					
REF: S0037T		SCALE: NTS					
		SHEET 1 OF 1					