
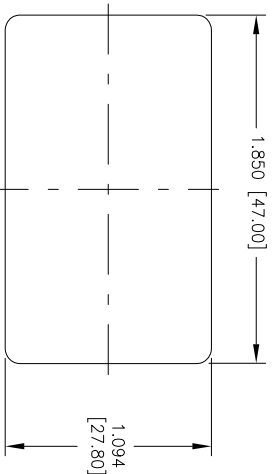
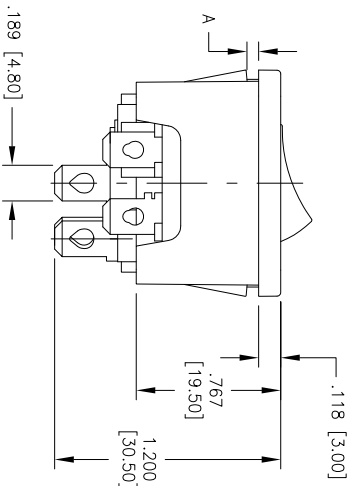
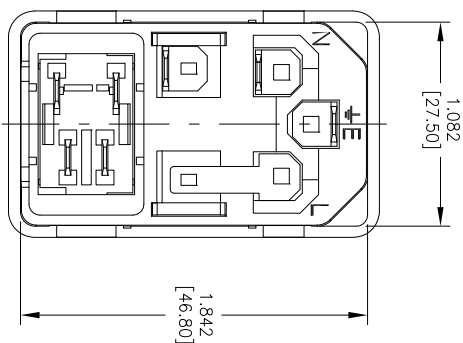
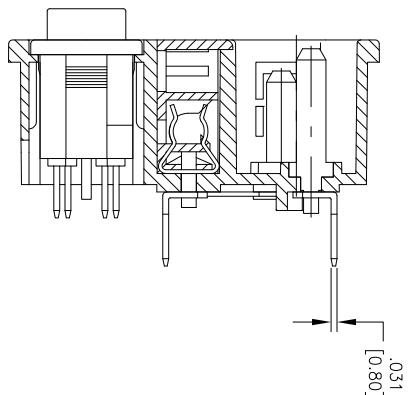


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/5/11	

APPROVED: _____
DATE: _____ TITLE: _____

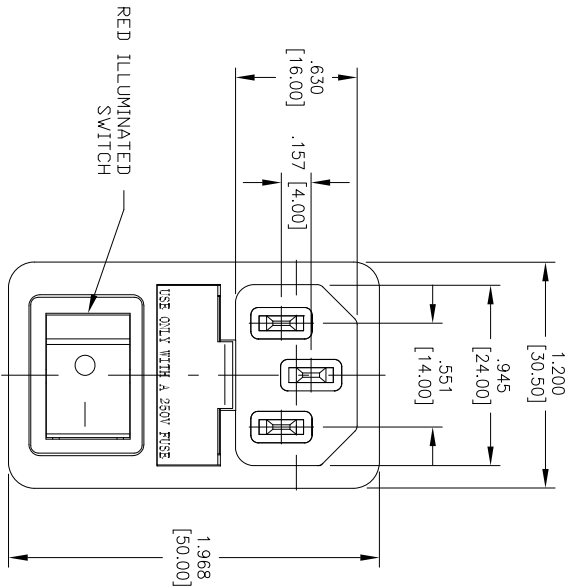

PANEL CUT-OUT

IEC-GS-1-XXX-RLS	A
IEC-GS-1-100-RLS	.039 [1.00]
IEC-GS-1-150-RLS	.059 [1.50]
IEC-GS-1-200-RLS	.079 [2.00]

SPECIFICATIONS:

Material:

Insulator: Thermoplastic, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Tin over Copper underplate

Electrical:

Operating voltage: 250 VAC max

Current rating: 15 Amps max (cUL)

10 Amps max (VDE)

Insulation resistance: 100 Mohms min @ 500 VDC

Dielectric withstanding voltage: 2000 VAC for 1 minute

Temperature Rating:

Operating temperature: -65°C to +125°C

Environmental:

Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

IEC CONNECTOR, ISOLATED FUSE

1.50mm SNAP IN, .187" [4.80] QC TERMINAL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES		Holes		DATE		TITLE	
X	± .10	ØX	± .10			SIZE	PART NO.
.XX	± .020	ØXX	± .015			X	IEC-GS-1-XXX-RLS
.XXX	± .015	ØXXX	± .010				REV.
DRAWN	AY	1/5/11					
CHECKED	JL	1/5/11					
APPROVED							