Rev	AWO #	Description	Date	Appr
-		RELEASED	6/17/05	
A		REDRAWN	9/19/11	

APPROVED: _____

DATE: _____ TITLE: _____

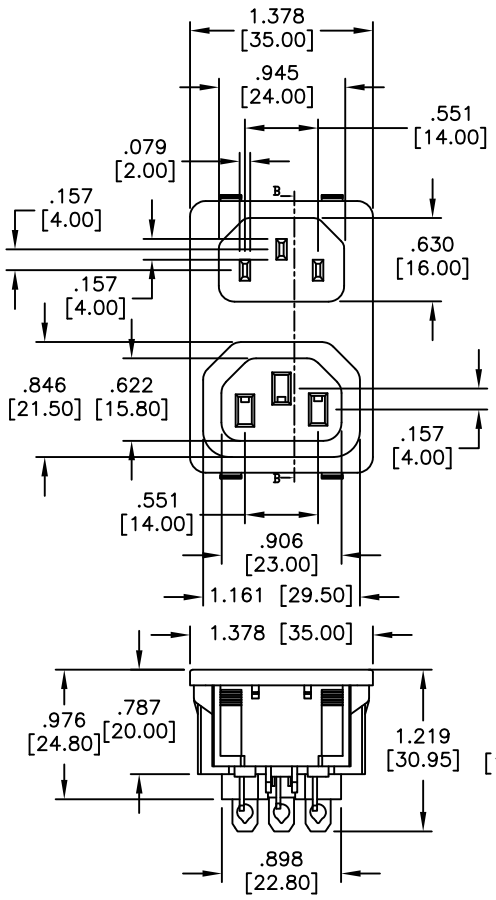

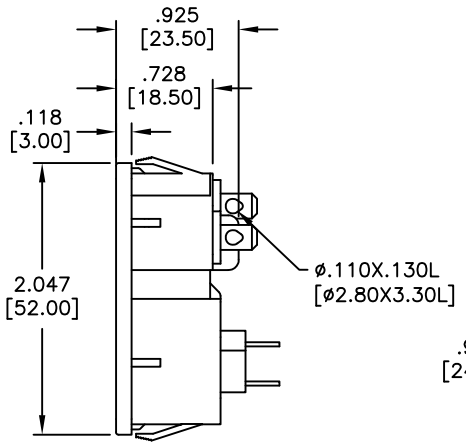

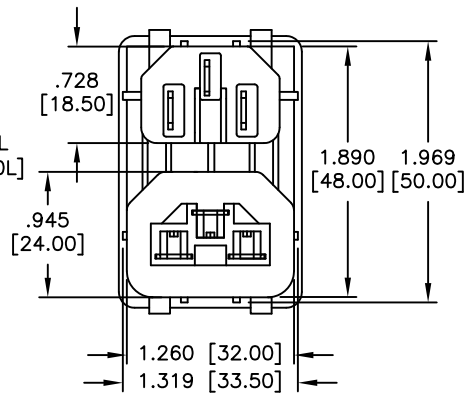

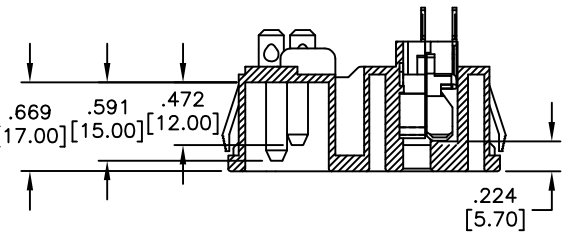

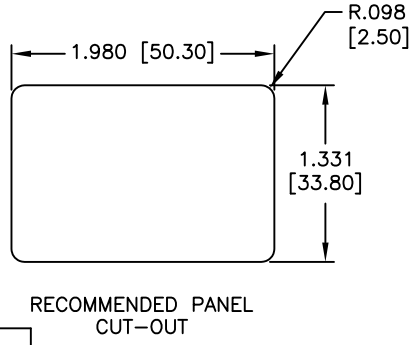

RECOMMENDED PANEL CUT–OUT

TERMINAL OPTIONS		
-1	-2	-3
.187 Q.C.	.250 Q.C.	.157 Solder
		

SPECIFICATIONS:
Material:
Insulator: Nylon 66, glass reinforced, rated UL 94V–0
IInsulator color: Black
Contacts: Brass
Soldering: Brass, Tin Plated
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC
Current rating: UL: 15 Amps max
VDE: 10 Amps max
Insulation resistance: 100 Mohms min @ 500 VDC
Dielectric withstanding voltage: 2,000 VAC for 1 minute
Temperature Rating:
Operating temperature: –25°C to +70°C
Environmental:
Lead free, RoHS compliant
Recommended soldering temp: 235°C for 5 seconds

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	6/17/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
IEC MALE INLET / OUTLET
SNAP-IN PANEL MOUNT

SIZE	PART NO.	REV.
X	IEC-HS-X	A

REF:	SCALE:	SHEET
S00037T	NTS	1 OF 1