


Rev	AWO #	Description	Date	Appr
-		RELEASED	XX/XX/XX	


APPROVED: _____

DATE: _____ TITLE: _____

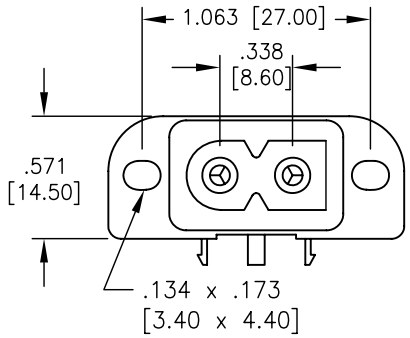







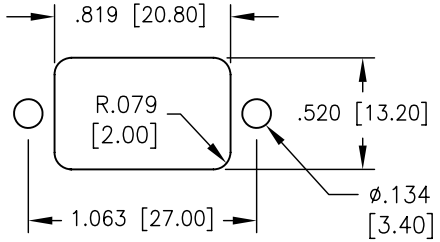

RECOMENDED
PANEL CUT-OUT

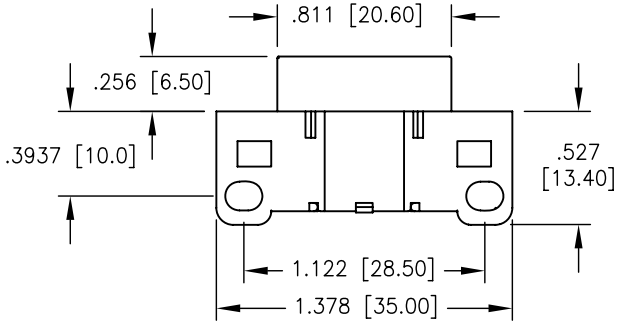

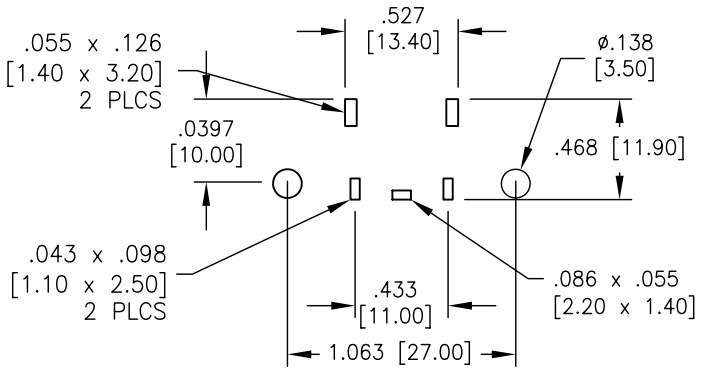

RECOMENDED
PCB LAYOUT

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze, Tin Plated
Electrical:
Operation voltage: 250 VAC max
Current rating: 2.5 Amps max
Insulation resistance: 100 Mohms min @ 500 VDC
Dielectric withstanding voltage: 2000 VAC for 1 minute
Environmental:
Lead free, RoHS compliant.
Recommended soldering temp: 235 for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM [INCHES]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	5/4/04
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
IEC 60320, C8 POLARIZED, R/A,
PCB TERMINAL, PANEL MOUNT

SIZE	PART NO.	REV.
X	IEC-NF-4	-

REF: | SCALE: NTS | SHEET 1 OF 1