

UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
4372	A	INITIAL RELEASE	DG	6–13
5181	B	SEE DAR	DG	9–14

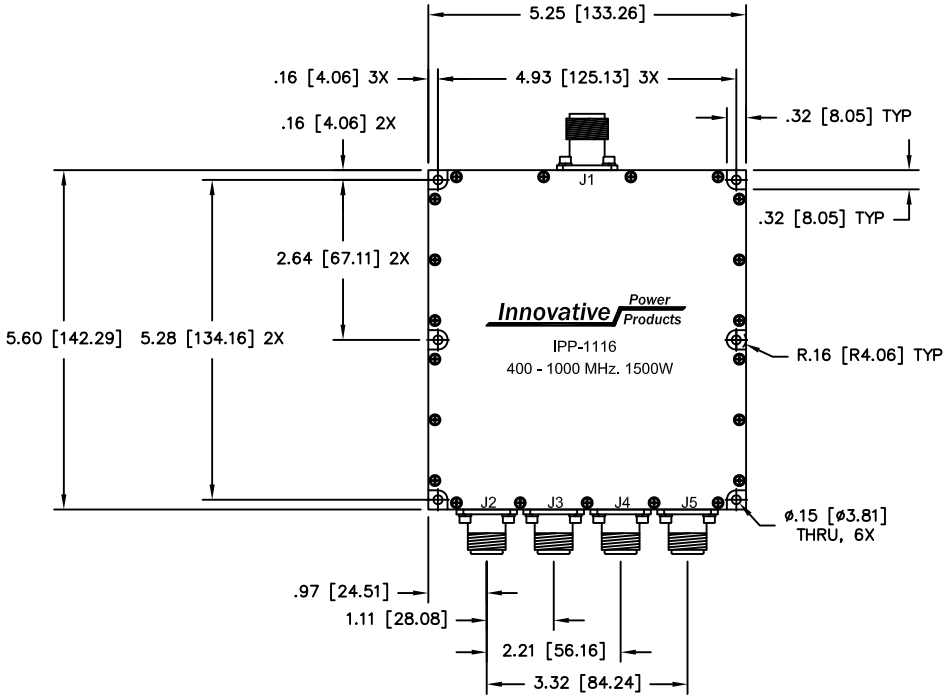

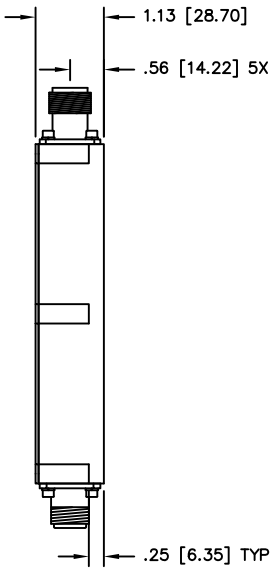

NOTES:

1. CONNECTOR TYPE J1: TYPE 'SC' FEMALE
   J2–J5: TYPE 'N' FEMALE
2. RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	400 – 1000 MHz.
INSERTION LOSS:	< 0.65 dB
VSWR:	< 1.30:1
PHASE BALANCE:	±5°
AMPLITUDE BALANCE:	±0.2 dB
POWER:	1500 WATT
ISOLATION:	>5 dB
OPERATING TEMP:	–55°C TO +85°C

MATERIAL AL. ALLOY 6061-T651	DWN DG	DATE 5-10	Innovative Power Products
FINISH ELECTRODEPOSITED NICKEL PER QQ-N-290 .0003 MIN.SEMI-BRIGHT	ENG TJD	DATE 5-10	TITLE OUTLINE 4-Way, 400-1000 MHz, 1500W
TOLERANCE .XXX ±.005 .XX ±.02 ANG. ±1/2°	MANUF	DATE	SIZE B / P/N IPP-1116 / REV. B
	CAGE CODE: 437R2		
	SHEET 1 OF 1	SCALE .5:1	