
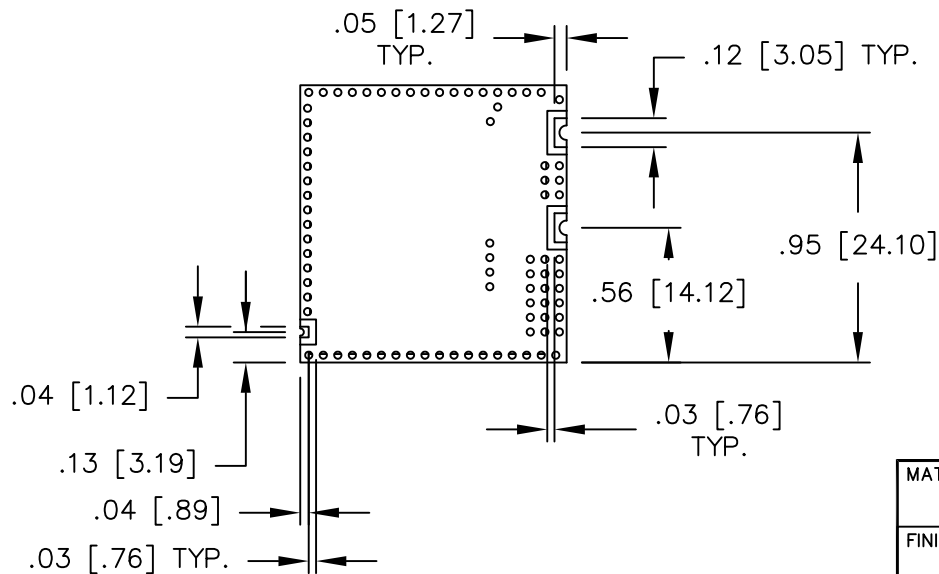


UNAUTHORIZED USE OF THIS
DRAWING IS STRICTLY PROHIBITED

DAR	REV	DESCRIPTION	APPVD	DATE
3314	A	INITIAL RELEASE	TJD	9-11
3384	B	SEE DAR	TJD	11-11
4434	C	SEE DAR	DG	7-13
5267	D	SEE DAR	DG	11-14
5444	E	SEE DAR	DG	3-15

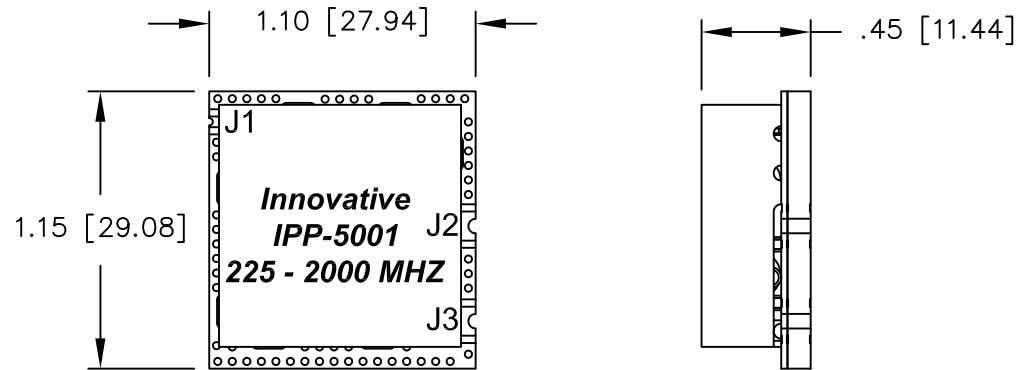

NOTES:

1. DO NOT EXCEED 220° C WHEN INSTALLING.
2. RoHS COMPLIANT.

ELECTRICAL SPECIFICATIONS

FREQUENCY:	225 - 2000 MHz.
INSERTION LOSS:	< 0.45 dB
VSWR:	< 1.35:1
PHASE BALANCE:	180° ±8°
AMPLITUDE BALANCE:	±0.45 dB
POWER:	100 WATT
IMPEDANCE:	J1: 50 OHM J2,J3: 25 OHM
TEMPERATURE:	-55°C TO 85°C

MATERIAL	DWN DG	DATE 8-11	Innovative <i>Power</i> Products		
FINISH	ENG TJD	DATE 8-11			
IMMERSION TIN	MANUF	DATE	TITLE OUTLINE		
TOLERANCE .XX ±.02 .XXX ±.010 ANG. ±1/2°	CAGE CODE: 437R2		2 - WAY BALUN 225 - 2000 MHz 100 WATT		
	SHEET 1 OF 1	SCALE 2:1	SIZE B	P/N IPP-5001	REV. E