Crystal Clock Oscillator Specification

IQXO-640

ISSUE 2; July 2016

Description

- Standard 1.6 x 1.2mm crystal oscillator in a ceramic package with a seam sealed metal lid, hermetically sealed

Frequency Parameters

Frequency	1.0MHz to 80.0MHz
Frequency Stability	±30.00ppm to ±100.00ppm
Ageing	±5ppm

Electrical Parameters

Supply Voltage	3.3V ±10%
Standby Current: 10µA max	

Operating Temperature Ranges

- -20 to 70°C
- -40 to 85°C

Output Details

Output Compatability	CMOS
Drive Capability	15pF max

Output Control

- Logic '1' (≥70%VS) to pad 1 enables oscillator output
  Logic '0' (≤30%VS) to pad 1 disables oscillator output; when disabled the oscillator output goes to the high impedance state
  No connection to pad 1 enables oscillator output

Environmental Parameters

- Shock: IEC 60068-2-27: 1000G, 1ms, 3 times in each of 3 mutually perpendicular planes
- Vibration: IEC 60068-2-6: 1.5mm amplitude, 10Hz-55Hz, 1min in 3 mutually perpendicular planes, duration 2hrs each plane (total 6hrs)
- Storage Temperature Range: –40 to 85°C


Ordering Information

- Frequency*
  Model*
  Output
  Frequency Stability*
  Operating Temperature Range*
  Supply Voltage
  (*minimum required)
- Example
  10.0MHz IQXO-640
  CMOS ±50ppm –20 to 70C 3.3V


Compliance

RoHS Status (2011/65/EU)	Compliant
REACh Status	Compliant
MSL Rating (JDEC-STD-033):	Not Applicable


Outline (mm)

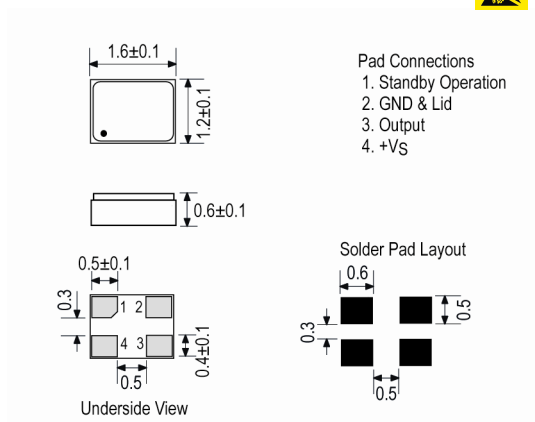

Test Circuit

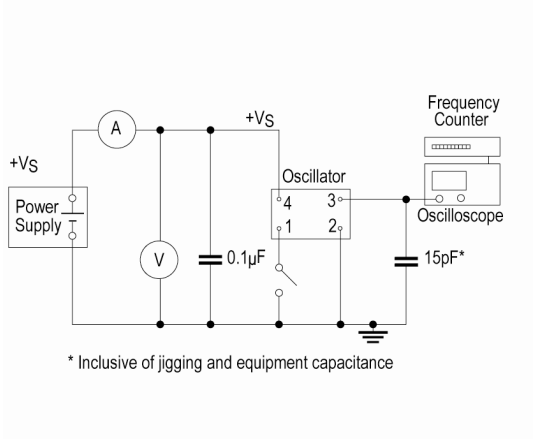

Wave Form

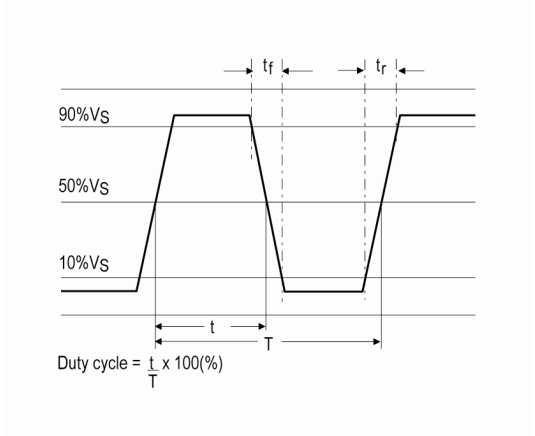

Sales Office Contact Details:

UK: +44 (0)1460 270200 | France: 0800 901 383 | Email: info@iqdfrequencyproducts.com

Germany: 0800 1808 443 | USA: +1.760.318.2824 | Web: www.iqdfrequencyproducts.com

Packaging Details

- Pack Style: Cutt Cut tape
  Pack Size: 1
- Pack Style: Reel Tape & reel in accordance with EIA-481-D
  Pack Size: 3,000

Electrical Specification - maximum limiting values 3.3V ±10%

Frequency Min	Frequency Max	Temperature Range	Stability (Min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
1.0MHz	20.0MHz	-20 to 70	±30.0	4	5	45/55%
		-40 to 85	±50.0	4	5	45/55%
20.000001MHz	40.0MHz	-20 to 70	±30.0	6	5	45/55%
		-40 to 85	±50.0	6	5	45/55%
40.000001MHz	60.0MHz	-20 to 70	±30.0	8	5	45/55%
		-40 to 85	±50.0	8	5	45/55%
60.000001MHz	80.0MHz	-20 to 70	±30.0	10	5	45/55%
		-40 to 85	±50.0	10	5	45/55%

This document was correct at the time of printing; please contact your local sales office for the latest version.
Click to view latest version on our website.

Sales Office Contact Details:
UK: +44 (0)1460 270200
France: 0800 901 383
Email: info@iqdfrequencyproducts.com
Germany: 0800 1808 443
USA: +1.760.318.2824
Web: www.iqdfrequencyproducts.com