



Technical Data Sheet

Opto Interrupter

ITR8307/F43

■ Features

- Fast response time
- High sensitivity
- Cut-Off visible wavelength
- Thin
- Compact
- Pb free
- This product itself will remain within RoHS compliant version.



■ Descriptions

ITR8307/F43 is a light reflection switch which includes a GaAs IR-LED transmitter and a NPN photo-transistor with a high sensitive receiver for short distance, operating in the infrared range. Both components are mounted side- by- side in a plastic package.


■ Applications

- Camera
- VCR
- Floppy disk driver
- Cassette type recorder
- Various microcomputer control equipment

■ Device Selection Guide

Device No.	Chip Material
IR	GaAs
PT	Silicon

Package Dimensions

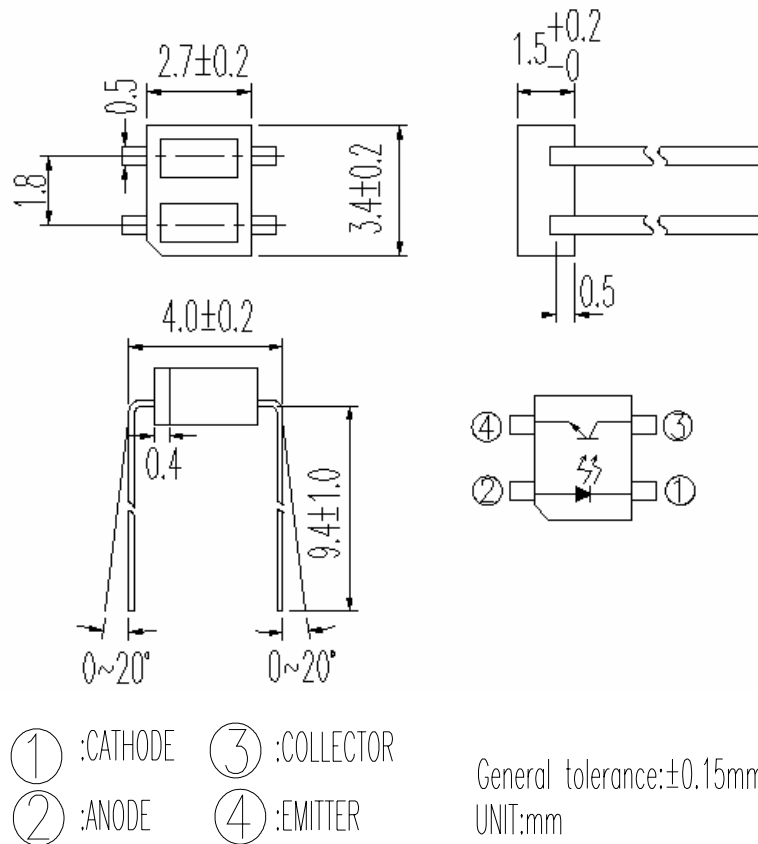

Absolute Maximum Ratings (Ta=25)

Parameter		Symbol	Ratings	Unit
Input	Power Dissipation at(or below) 25 Free Air Temperature	P_d	75	mW
	Reverse Voltage	V_R	5	V
	Forward Current	I_F	50	mA
	Peak Forward Current (*1)	I_{FP}	1	A
Output	Collector Power Dissipation	P_C	100	mW
	Collector Current	I_C	50	mA
	Collector-Emitter Voltage	$B V_{CEO}$	30	V
	Emitter-Collector Voltage	$B V_{ECO}$	5	V
Operating Temperature		T_{opr}	-25~+85	
Storage Temperature		T_{stg}	-30~+90	
Lead Soldering Temperature (*2)		T_{sol}	260	

(* 1) $t_w=100 \mu \text{ sec.}$, $T=10 \text{ msec.}$

(* 2) $t=5 \text{ Sec}$

Electro-Optical Characteristics (Ta=25 °C)

Parameter		Symbol	Min.	Typ.	Max.	Unit	Conditions
Input	Forward Voltage	V_F	--	1.2	1.6	V	$I_F = 20\text{mA}$
	Reverse Current	I_R	--	--	10	μA	$V_R = 6\text{V}$
	Peak Wavelength	λ_P	--	940	--	nm	$I_F = 20\text{mA}$
Output	Dark Current	I_{CEO}	--	--	1	μA	$V_{CE} = 10\text{V}$, $I_F = 0\text{mA}$
Transfer Characteristics	Collector Current	$I_{C(ON)}$	0.1	--	--	mA	$V_{CE} = 5\text{V}$, $I_F = 20\text{mA}$
	Leakage Current	I_{LEAK}	--	--	1	μA	$V_{CE} = 2\text{V}$, $I_F = 4\text{mA}$
	Rise time	t_r	--	20	--	μs	$V_{CE} = 2\text{V}$ $I_C = 10\text{mA}$ $R_L = 100\Omega$, $d = 1\text{mm}$
	Fall time	t_f	--	20	--	μs	

Typical Electrical/Optical/Characteristics Curves for IR

Fig. 1 Forward Current vs. Ambient Temperature

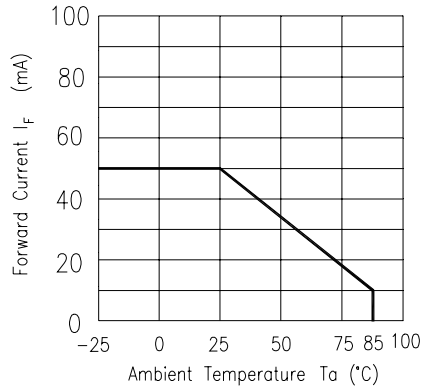


Fig. 2 Spectral Distribution

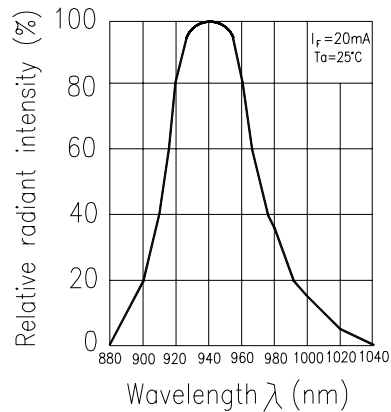


Fig. 3 Peak Emission Wavelength vs. Ambient Temperature

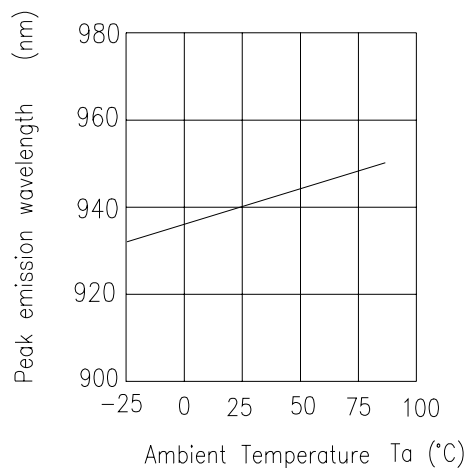


Fig. 4 Forward Current vs. Forward Voltage

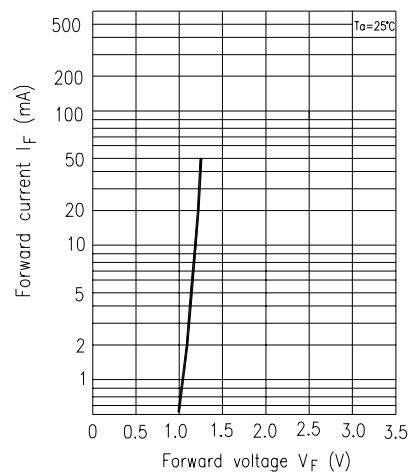


Fig. 5 Forward Voltage vs. Ambient Temperature


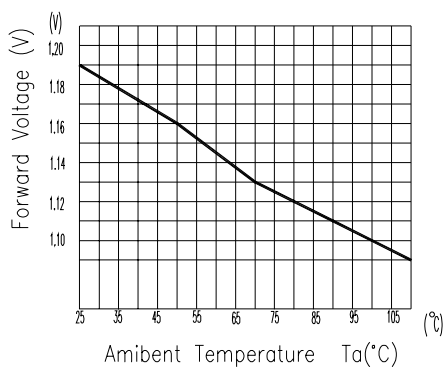


Fig. 6 Relative Radiant Intensity vs. Angular Displacement

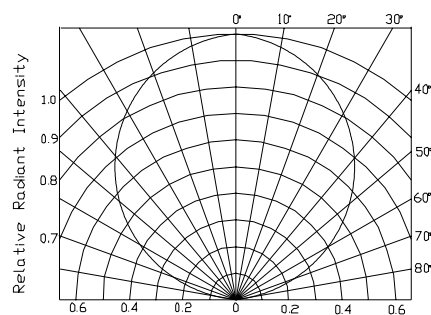

Typical Electrical/Optical/Characteristics Curves for PT

Fig.1 Collector Power Dissipation vs. Ambient Temperature

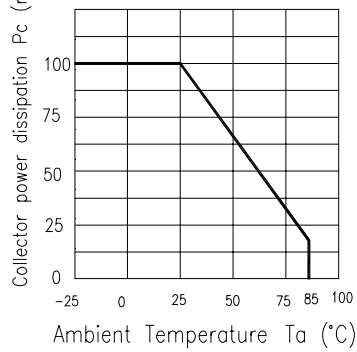


Fig.2 Collector Dark Current vs. Ambient Temperature

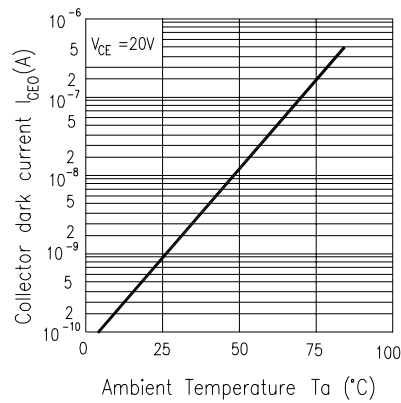


Fig. 3 Relative Collector Current vs. Ambient Temperature

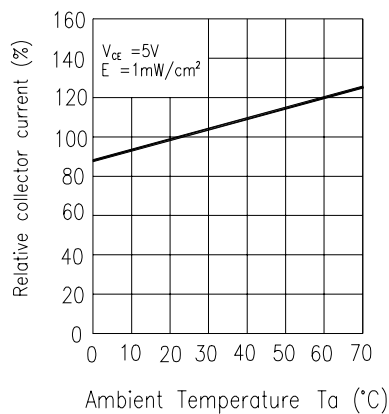


Fig.4 Collector Current vs. Irradiance

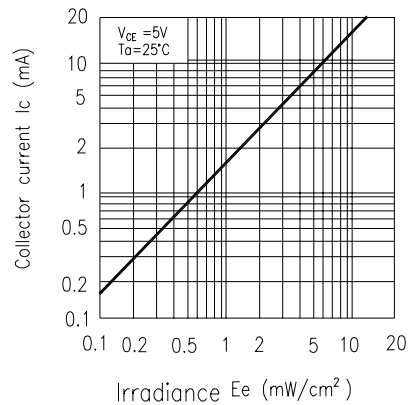


Fig.5 Spectral Sensitivity


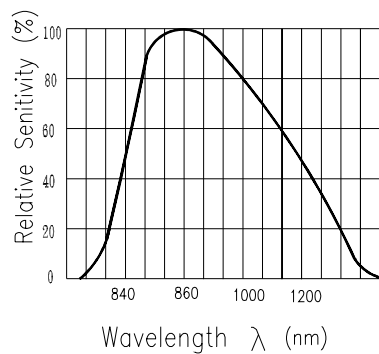


Fig.6 Collector Current vs. Collector-emitter Voltage

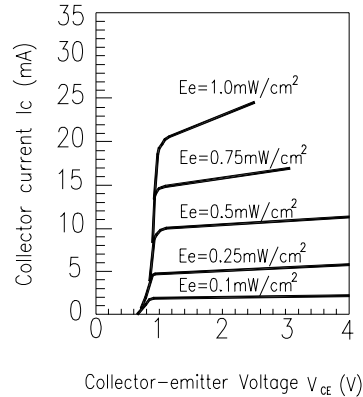

Typical Electrical/Optical/Characteristics Curves for ITR

Fig.1 Relative Collector Current vs. Distance between Sensor and Al Evaporation Galss

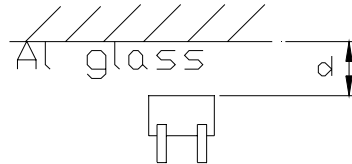
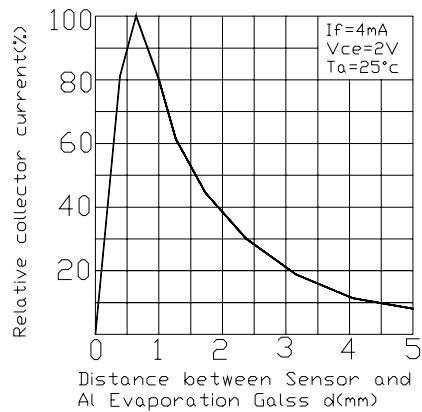


Fig.2 Relative Collector Current vs. Card Moving Distance (1)







Fig.3 Response Time vs. Load Resistance

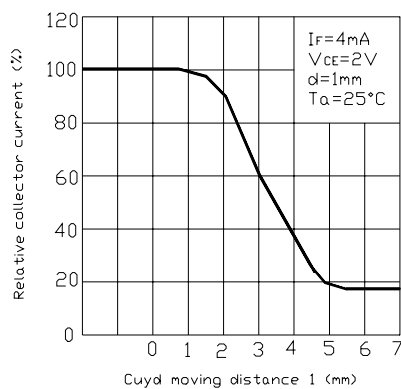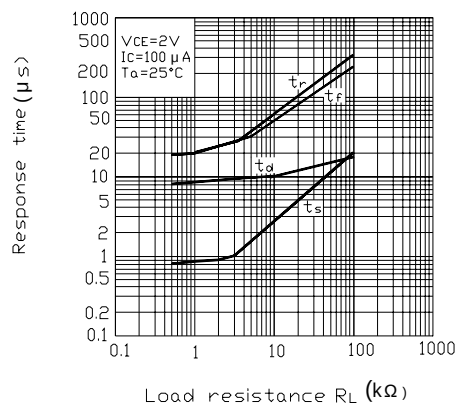

Reliability Test Item And Condition


The reliability of products shall be satisfied with items listed below.

Confidence level : 90% LTPD : 10%

No	項目 Item	測試條件 Test condition	Test Hours/cycle	Sample	Ac/Re
1	鐸錫耐熱 Solder Heat	Temp. 260 ±5	10secs	76PCS	0/1
2	溫度循環 Temp. cycle	H:100 15mins ↕ 5mins L:-40 15mins	300Cycle	76PCS	0/1
3	冷熱衝擊 Thermal shock	H:100 5mins ↕ 10secs L:-10 5mins	300Cycle	76PCS	0/1
4	高溫保存 High temp. storage	Temp.:100	1000hrs	76PCS	0/1
5	低溫保存 Low temp. storage	Temp.: -40	1000hrs	76PCS	0/1
6	壽命試驗 Dc operating life	Temp.:25 I _F =20mA and V _{CE} =5V	1000hrs	76PCS	0/1
7	高溫高濕 High temp./High humidity	85 /85%R.H	1000hrs	76PCS	0/1
8	高溫點亮 High temp. Burn-in	Temp.:85 I _F =20mA and V _{CE} =5V	1000hrs	76PCS	0/1
9	低溫點亮 Low temp. Burn-in	Temp.: -40 I _F =20mA and V _{CE} =5V	1000hrs	76PCS	0/1

Packing Quantity Specification

1. 160 Pcs/ Per Tube
2. 18 Tubes / Inner Carton
3. 12 Inner Cartons / Outside Carton

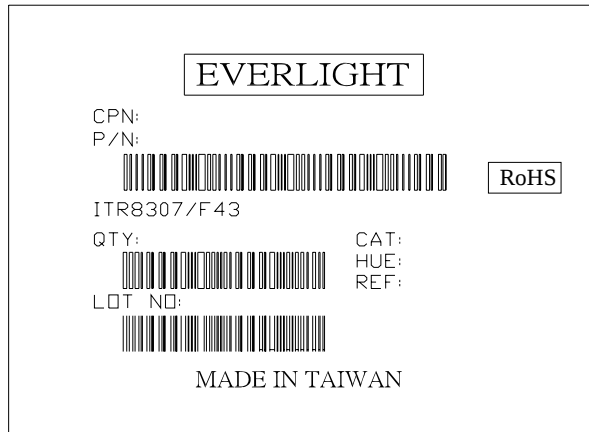Label Form Specification

CPN: Customer's Production Number

P/N : Production Number

QTY: Packing Quantity

CAT: Ranks

HUE: Peak Wavelength

REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

■ Recommended Method of Storage

The following are general recommendations for moisture sensitive level (MSL) 4 storage and use :

- Shelf life in sealed bag: 12 months at $< 40^{\circ}\text{C}$ and $< 90\%$ relative humidity (RH)
- After bag is opened, devices that will be subjected to reflow solder or other high temperature process must :
 - a) Mounted within 72 hours of factory conditions $< 30^{\circ}\text{C}/60\%\text{RH}$, or
 - b) Stored at $< 20\%$ RH
- Devices require bake, before mounting, if :
 - Humidity Indicator Card is $> 20\%$ when read at $23 \pm 5^{\circ}\text{C}$
- If baking is required, devices may be baked :
 - a) 192 hours at 40°C ,and $< 5\%$ RH(dry air/nitrogen) or
 - b) 96 hours at 60°C ,and $< 5\%$ RH for all device containers
 - c) 24 hours at 125°C

Notes

1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.