IXYS

Advanced Technical Information

HiPerFET™ Power MOSFETs

IXFN 20N120

V_{DSS} = 1200 V
I_{D25} = 20 A
$R_{DS(on)}$ = 0.75 Ω
t_{rr} ≤ 300 ns

N-Channel Enhancement Mode
Avalanche Rated, High dv/dt, Low t_{rr}



Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C	1200	V
V_{DGR}	T_J = 25°C to 150°C; R_{GS} = 1 MΩ	1200	V
V_{GS}	Continuous	±30	V
V_{GSM}	Transient	±40	V
I_{D25}	T_C = 25°C, Chip capability	20	A
I_{DM}	T_C = 25°C, pulse width limited by T_{JM}	80	A
I_{AR}	T_C = 25°C	10	A
E_{AR}	T_C = 25°C	40	mJ
E_{AS}	T_C = 25°C	2	J
dv/dt	$I_S \le I_{DM}$, di/dt ≤ 100 A/µs, $V_{DD} \le V_{DSS}$, $T_J \le$ 150°C, R_G = 2 Ω	5	V/ns
P_D	T_C= 25°C	780	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
V_{ISOL}	50/60 Hz, RMS t = 1 min	2500	V~
	$I_{ISOL} \le$ 1 mA t = 1 s	3000	V~
M_d	Mounting torque	1.5/13	Nm/lb.in.
	Terminal connection torque	1.5/13	Nm/lb.in.
Weight		30	g

Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
V_{DSS}	V_{GS} = 0 V, I_D = 1 mA	1200			V
$V_{GH(th)}$	$V_{DS} = V_{GS}$, I_D = 8 mA	2.5		4.5	V
I_{GSS}	V_{GS} = ±30 V_{DC}, V_{DS} = 0			±100	nA
I_{DSS}	$V_{DS} = V_{DSS}$ T_J = 25°C			100	µA
	V_{GS} = 0 V T_J = 125°C			2	mA
$R_{DS(on)}$	V_{GS} = 10 V, $I_D = 0.5 \bullet I_{D25}$ Pulse test, t ≤ 300 µs, duty cycle d ≤ 2 %			0.75	Ω

miniBLOC, SOT-227 B (IXFN)
E153432



G = Gate D = Drain
S = Source TAB = Drain

Either Source terminal at miniBLOC can be used as Main or Kelvin Source

Features

- International standard package
- miniBLOC, with Aluminium nitride isolation
- Low $R_{DS\ (on)}$ HDMOS™ process
- Rugged polysilicon gate cell structure
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
- Fast intrinsic Rectifier

Applications

- DC-DC converters
- Battery chargers
- Switched-mode and resonant-mode power supplies
- DC choppers
- Temperature and lighting controls

Advantages

- Easy to mount
- Space savings
- High power density

© 2003 IXYS All rights reserved

Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
g_{fs}	V_{DS} = 20 V; I_D = 0.5 • I_{D25}, pulse test	15	27		S
C_{iss}	V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz		7400		pF
C_{oss}			560		pF
C_{rss}			100		pF
$t_{d(on)}$	V_{GS} = 10 V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25} R_G = 1 Ω (External),		25		ns
t_r			45		ns
$t_{d(off)}$			75		ns
t_f			20		ns
$Q_{g(on)}$	V_{GS} = 10 V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		160		nC
Q_{gs}			35		nC
Q_{gd}			60		nC
R_{thJC}				0.16	K/W
R_{thCK}			0.05		K/W

miniBLOC, SOT-227 B



M4 screws (4x) supplied

Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	38.00	38.23	1.496	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.76	0.84	0.030	0.033
M	12.60	12.85	0.496	0.506
N	25.15	25.42	0.990	1.001
O	1.98	2.13	0.078	0.084
P	4.95	5.97	0.195	0.235
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.174
S	4.72	4.85	0.186	0.191
T	24.59	25.07	0.968	0.987
U	-0.05	0.1	-0.002	0.004

Source-Drain Diode

Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
I_S	V_{GS} = 0 V			20	A
I_{SM}	Repetitive; pulse width limited by T_{JM}			80	A
V_{SD}	I_F = I_S, V_{GS} = 0 V, Pulse test, t ≤ 300 µs, duty cycle d ≤ 2 %			1.5	V
t_{rr}	I_F = I_S, -di/dt = 100 A/µs, V_R = 100 V			300	ns
Q_{RM}			1.4		µC
I_{RM}			8		A

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,881,106 5,017,508 5,049,961 5,187,117 5,486,715 6,306,728B1 6,259,123B1 6,306,728B1 4,850,072 4,931,844 5,034,796 5,063,307 5,237,481 5,381,025 6,404,065B1 6,162,665 6,534,343 6,583,505

Fig. 1. Output Characteristics @ 25 deg. C

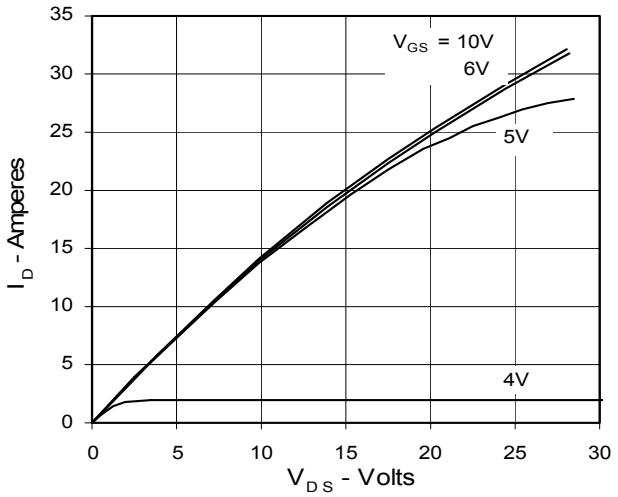

Fig. 2. Output Characteristics @ 125 Deg. C

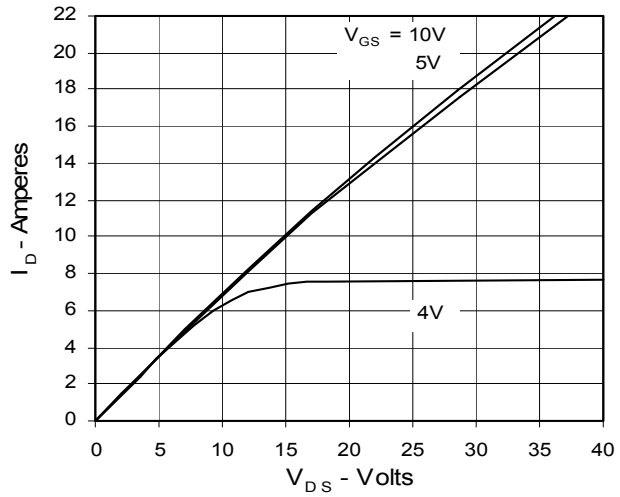

Fig. 3. $R_{DS(on)}$ Normalized to I_{D25} Value vs. Junction Temperature

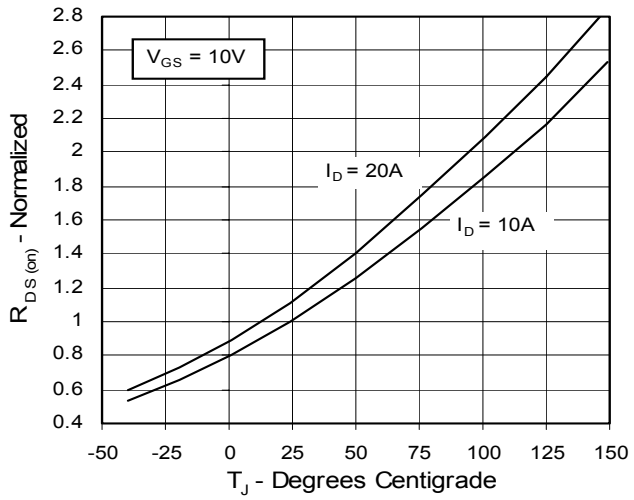

Fig. 4. $R_{DS(on)}$ Normalized to I_{D25} Value vs. I_D

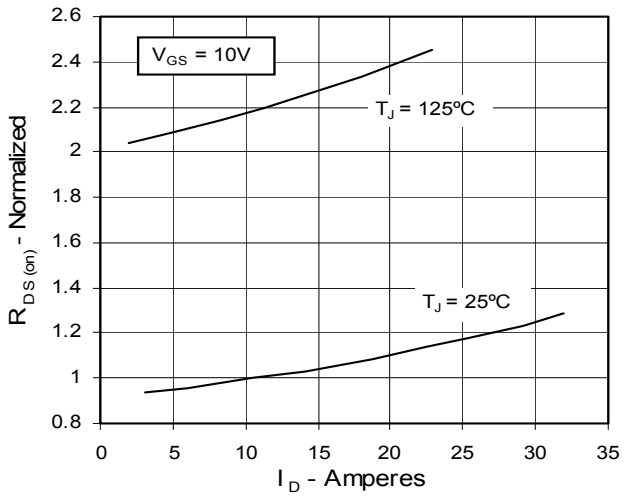

Fig. 5. Drain Current vs. Case Temperature

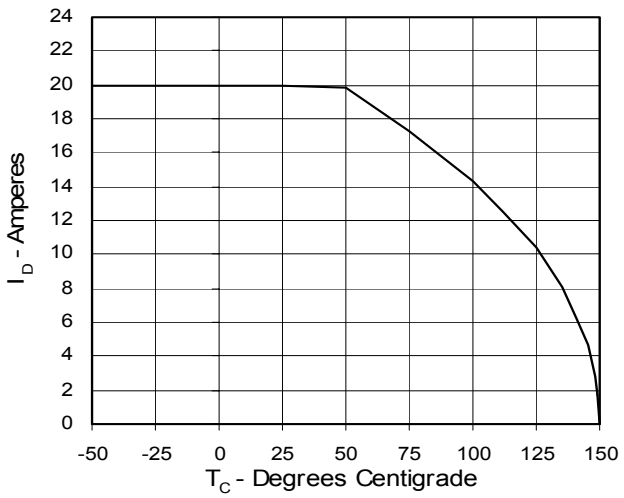

Fig. 6. Input Admittance

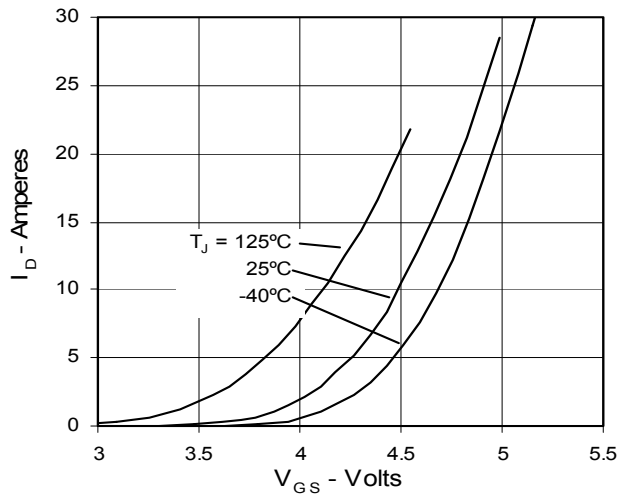

© 2003 IXYS All rights reserved

Fig. 7. Transconductance

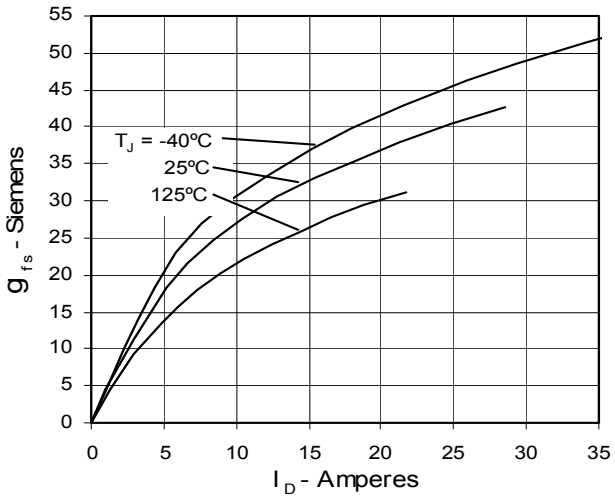

Fig. 8. Source Current vs. Source-To-Drain Voltage

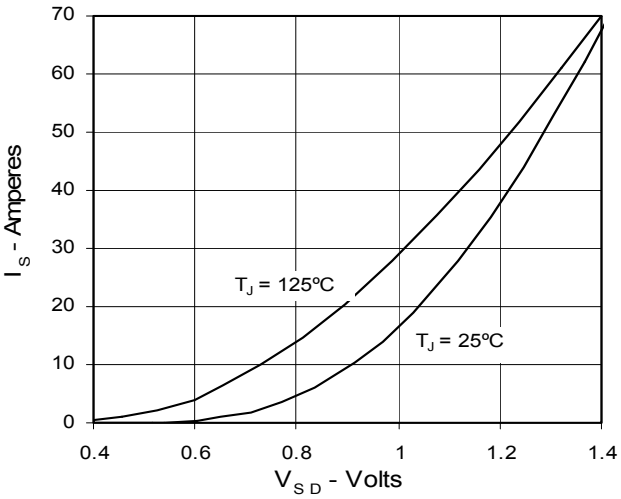

Fig. 9. Gate Charge

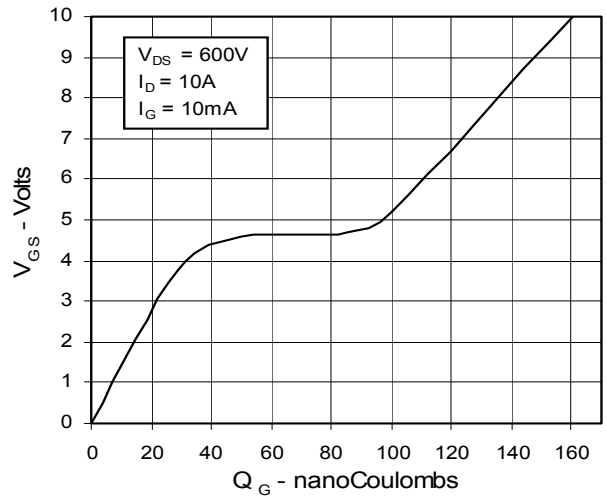

Fig. 10. Capacitance

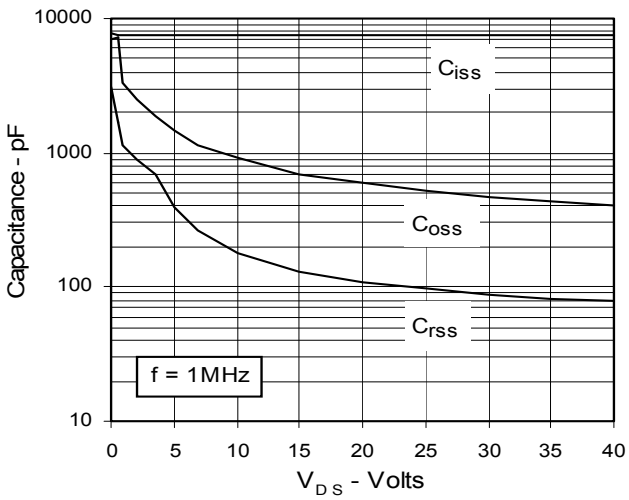

Fig. 11. Maximum Transient Thermal Resistance

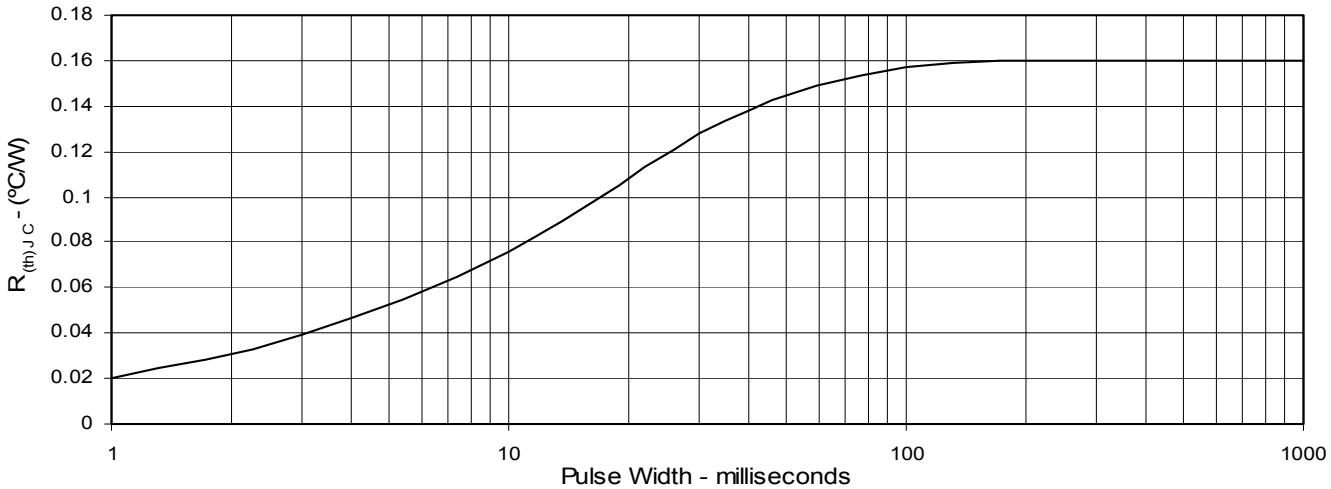

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,881,106 5,017,508 5,049,961 5,187,117 5,486,715 6,306,728B1 6,259,123B1 6,306,728B1 4,850,072 4,931,844 5,034,796 5,063,307 5,237,481 5,381,025 6,404,065B1 6,162,665 6,534,343 6,583,505