


# IGBT

**IXGH 20N100**  
**IXGT 20N100**


$$\begin{aligned} V_{CES} &= 1000 \text{ V} \\ I_{C25} &= 40 \text{ A} \\ V_{CE(sat)} &= 3.0 \text{ V} \\ t_{fi(typ)} &= 280 \text{ ns} \end{aligned}$$




Preliminary data

| Symbol                                                                          | Test Conditions                                                                                                       | Maximum Ratings                  |                  |
|---------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|----------------------------------|------------------|
| $V_{CES}$                                                                       | $T_J = 25^\circ\text{C to } 150^\circ\text{C}$                                                                        | 1000                             | V                |
| $V_{CGR}$                                                                       | $T_J = 25^\circ\text{C to } 150^\circ\text{C}; R_{GE} = 1 \text{ M}\Omega$                                            | 1000                             | V                |
| $V_{GES}$                                                                       | Continuous                                                                                                            | $\pm 20$                         | V                |
| $V_{GEM}$                                                                       | Transient                                                                                                             | $\pm 30$                         | V                |
| $I_{C25}$                                                                       | $T_C = 25^\circ\text{C}$                                                                                              | 40                               | A                |
| $I_{C90}$                                                                       | $T_C = 90^\circ\text{C}$                                                                                              | 20                               | A                |
| $I_{CM}$                                                                        | $T_C = 25^\circ\text{C}, 1 \text{ ms}$                                                                                | 80                               | A                |
| <b>SSOA</b><br><b>(RBSOA)</b>                                                   | $V_{GE} = 15 \text{ V}, T_{VJ} = 125^\circ\text{C}, R_G = 47 \Omega$<br>Clamped inductive load, $L = 100 \mu\text{H}$ | $I_{CM} = 40$<br>@ $0.8 V_{CES}$ | A                |
| $P_C$                                                                           | $T_C = 25^\circ\text{C}$                                                                                              | 150                              | W                |
| $T_J$                                                                           |                                                                                                                       | -55 ... +150                     | $^\circ\text{C}$ |
| $T_{JM}$                                                                        |                                                                                                                       | 150                              | $^\circ\text{C}$ |
| $T_{stg}$                                                                       |                                                                                                                       | -55 ... +150                     | $^\circ\text{C}$ |
| Maximum Lead temperature for soldering<br>1.6 mm (0.062 in.) from case for 10 s |                                                                                                                       | 300                              | $^\circ\text{C}$ |
| Maximum Tab temperature for soldering SMD devices for 10 s                      |                                                                                                                       | 260                              | $^\circ\text{C}$ |
| $M_d$                                                                           | Mounting torque (M3)                                                                                                  | 1.13/10 Nm/lb.in.                |                  |
| <b>Weight</b>                                                                   |                                                                                                                       | TO-247 AD                        | 6 g              |
|                                                                                 |                                                                                                                       | TO-268                           | 4 g              |

**TO-268**  
**(IXGT)**



**TO-247 AD (IXGH)**



G = Gate, C = Collector,  
E = Emitter, TAB = Collector

## Features

- International standard packages JEDEC TO-268 surface and JEDEC TO-247 AD
- High current handling capability
- MOS Gate turn-on - drive simplicity

## Applications

- AC motor speed control
- DC servo and robot drives
- DC choppers
- Uninterruptible power supplies (UPS)
- Switched-mode and resonant-mode power supplies
- Capacitor discharge


## Advantages

- High power density
- Suitable for surface mounting
- Easy to mount with 1 screw, (isolated mounting screw hole)

| Symbol        | Test Conditions                                                                                   | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |                           |
|---------------|---------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|---------------------------|
|               |                                                                                                   | min.                                                                              | typ. | max.                      |
| $BV_{CES}$    | $I_C = 1 \text{ mA}, V_{GE} = 0 \text{ V}$                                                        | 1000                                                                              |      | V                         |
| $V_{GE(th)}$  | $I_C = 250 \mu\text{A}, V_{CE} = V_{GE}$                                                          | 2.5                                                                               |      | V                         |
| $I_{CES}$     | $V_{CE} = V_{CES}, V_{GE} = 0 \text{ V}$<br>$T_J = 25^\circ\text{C}$<br>$T_J = 125^\circ\text{C}$ |                                                                                   |      | 250 $\mu\text{A}$<br>1 mA |
| $I_{GES}$     | $V_{CE} = 0 \text{ V}, V_{GE} = \pm 20 \text{ V}$                                                 |                                                                                   |      | $\pm 100 \text{ nA}$      |
| $V_{CE(sat)}$ | $I_C = I_{C90}, V_{GE} = 15 \text{ V}$                                                            | 2.2                                                                               | 3.0  | V                         |


| Symbol       | Test Conditions                                                                                                                                                                                                                                                                                                               | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |          |
|--------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|----------|
|              |                                                                                                                                                                                                                                                                                                                               | min.                                                                              | typ. | max.     |
| $g_{fs}$     | $I_C = I_{C90}$ ; $V_{CE} = 10\text{ V}$ ,<br>Pulse test, $t \leq 300\text{ }\mu\text{s}$ , duty cycle $\leq 2\%$                                                                                                                                                                                                             | 12                                                                                | 16   | S        |
| $I_{C(ON)}$  | $V_{GE} = 10\text{ V}$ , $V_{CE} = 10\text{ V}$                                                                                                                                                                                                                                                                               |                                                                                   | 90   | A        |
| $C_{ies}$    | $V_{CE} = 25\text{ V}$ , $V_{GE} = 0\text{ V}$ , $f = 1\text{ MHz}$                                                                                                                                                                                                                                                           |                                                                                   | 1750 | pF       |
| $C_{oes}$    |                                                                                                                                                                                                                                                                                                                               |                                                                                   | 100  | pF       |
| $C_{res}$    |                                                                                                                                                                                                                                                                                                                               |                                                                                   | 38   | pF       |
| $Q_g$        | $I_C = I_{C90}$ , $V_{GE} = 15\text{ V}$ , $V_{CE} = 0.5 V_{CES}$                                                                                                                                                                                                                                                             |                                                                                   | 73   | nC       |
| $Q_{ge}$     |                                                                                                                                                                                                                                                                                                                               |                                                                                   | 13   | nC       |
| $Q_{gc}$     |                                                                                                                                                                                                                                                                                                                               |                                                                                   | 26   | nC       |
| $t_{d(on)}$  | <b>Inductive load, <math>T_J = 25^\circ\text{C}</math></b><br>$I_C = I_{C90}$ , $V_{GE} = 15\text{ V}$ , $L = 100\text{ }\mu\text{H}$ ,<br>$V_{CE} = 0.8 V_{CES}$ , $R_G = R_{off} = 47\text{ }\Omega$<br>Remarks: Switching times may increase for $V_{CE}$ (Clamp) $> 0.8 \cdot V_{CES}$ , higher $T_J$ or increased $R_G$  |                                                                                   | 30   | ns       |
| $t_{ri}$     |                                                                                                                                                                                                                                                                                                                               |                                                                                   | 30   | ns       |
| $t_{d(off)}$ |                                                                                                                                                                                                                                                                                                                               |                                                                                   | 350  | 700 ns   |
| $t_{fi}$     |                                                                                                                                                                                                                                                                                                                               |                                                                                   | 280  | 700 ns   |
| $E_{off}$    |                                                                                                                                                                                                                                                                                                                               |                                                                                   | 3.5  | 8.0 mJ   |
| $t_{d(on)}$  | <b>Inductive load, <math>T_J = 125^\circ\text{C}</math></b><br>$I_C = I_{C90}$ , $V_{GE} = 15\text{ V}$ , $L = 100\text{ }\mu\text{H}$ ,<br>$V_{CE} = 0.8 V_{CES}$ , $R_G = R_{off} = 47\text{ }\Omega$<br>Remarks: Switching times may increase for $V_{CE}$ (Clamp) $> 0.8 \cdot V_{CES}$ , higher $T_J$ or increased $R_G$ |                                                                                   | 30   | ns       |
| $t_{ri}$     |                                                                                                                                                                                                                                                                                                                               |                                                                                   | 30   | ns       |
| $E_{on}$     |                                                                                                                                                                                                                                                                                                                               |                                                                                   | 0.65 | mJ       |
| $t_{d(off)}$ |                                                                                                                                                                                                                                                                                                                               |                                                                                   | 700  | ns       |
| $t_{fi}$     |                                                                                                                                                                                                                                                                                                                               |                                                                                   | 520  | ns       |
| $E_{off}$    |                                                                                                                                                                                                                                                                                                                               |                                                                                   | 6.5  | mJ       |
| $R_{thJC}$   |                                                                                                                                                                                                                                                                                                                               |                                                                                   |      | 0.83 K/W |
| $R_{thCK}$   | (TO-247)                                                                                                                                                                                                                                                                                                                      |                                                                                   | 0.25 | K/W      |

## TO-247 AD (IXGH) Outline




| Dim. | Millimeter |       | Inches |       |
|------|------------|-------|--------|-------|
|      | Min.       | Max.  | Min.   | Max.  |
| A    | 19.81      | 20.32 | 0.780  | 0.800 |
| B    | 20.80      | 21.46 | 0.819  | 0.845 |
| C    | 15.75      | 16.26 | 0.610  | 0.640 |
| D    | 3.55       | 3.65  | 0.140  | 0.144 |
| E    | 4.32       | 5.49  | 0.170  | 0.216 |
| F    | 5.4        | 6.2   | 0.212  | 0.244 |
| G    | 1.65       | 2.13  | 0.065  | 0.084 |
| H    | -          | 4.5   | -      | 0.177 |
| J    | 1.0        | 1.4   | 0.040  | 0.055 |
| K    | 10.8       | 11.0  | 0.426  | 0.433 |
| L    | 4.7        | 5.3   | 0.185  | 0.209 |
| M    | 0.4        | 0.8   | 0.016  | 0.031 |
| N    | 1.5        | 2.49  | 0.087  | 0.102 |

## TO-268AA (D<sup>3</sup> PAK)

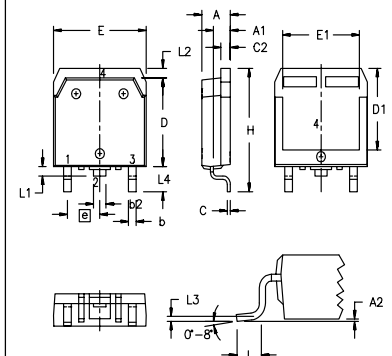

| Dim.           | Millimeter |       | Inches   |      |
|----------------|------------|-------|----------|------|
|                | Min.       | Max.  | Min.     | Max. |
| A              | 4.9        | 5.1   | .193     | .201 |
| A <sub>1</sub> | 2.7        | 2.9   | .106     | .114 |
| A <sub>2</sub> | .02        | .25   | .001     | .010 |
| b              | 1.15       | 1.45  | .045     | .057 |
| b <sub>2</sub> | 1.9        | 2.1   | .75      | .83  |
| C              | .4         | .65   | .016     | .026 |
| D              | 13.80      | 14.00 | .543     | .551 |
| E              | 15.85      | 16.05 | .624     | .632 |
| E <sub>1</sub> | 13.3       | 13.6  | .524     | .535 |
| e              | 5.45 BSC   |       | .215 BSC |      |
| H              | 18.70      | 19.10 | .736     | .752 |
| L              | 2.40       | 2.70  | .094     | .106 |
| L <sub>1</sub> | 1.20       | 1.40  | .047     | .055 |
| L <sub>2</sub> | 1.00       | 1.15  | .039     | .045 |
| L <sub>3</sub> | 0.25 BSC   |       | .010 BSC |      |
| L <sub>4</sub> | 3.80       | 4.10  | .150     | .161 |

## Min. Recommended Footprint

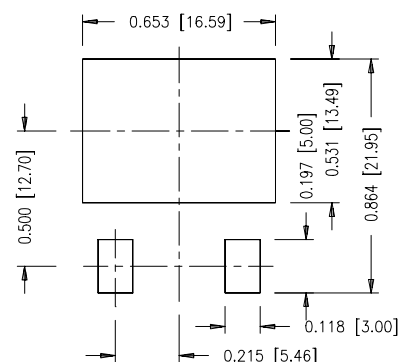



---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).