IXYS

Advance Technical Information

GenX3™ 600V IGBT

IXGH36N60B3

V_{CES} = 600V
I_{C110} = 36A
$V_{CE(sat)}$ ≤ 1.8V

Medium-Speed Low-Vsat PT IGBT
for 5 - 40kHz Switching



TO-247



G = Gate C = Collector
E = Emitter Tab = Collector

Symbol	Test Conditions	Maximum Ratings	
V_{CES}	T_J = 25°C to 150°C	600	V
V_{CGR}	T_J = 25°C to 150°C, R_{GE} = 1MΩ	600	V
V_{GES}	Continuous	± 20	V
V_{GEM}	Transient	± 30	V
I_{C25}	T_C = 25°C	92	A
I_{C110}	T_C = 110°C	36	A
I_{CM}	T_C = 25°C, 1ms	200	A
SSOA (RBSOA)	V_{GE}= 15V, T_{VJ} = 125°C, R_G = 5Ω Clamped Inductive Load	I_{CM} = 80 $V_{CE} \leq V_{CES}$	A
P_C	T_C = 25°C	250	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
T_L	1.6mm (0.062 in.) from Case for 10s	300	°C
T_{SOLD}	Plastic Body for 10s	260	°C
M_d	Mounting Torque	1.13/10	Nm/lb.in.
Weight		6	g

Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{CES}	I_C = 250μA, V_{GE}= 0V	600			V
$V_{GE(th)}$	I_C = 250μA, V_{CE} = V_{GE}	3.0		5.0	V
I_{CES}	V_{CE} = V_{CES}, V_{GE} = 0V			25	μA
	T_J = 125°C			250	μA
I_{GES}	V_{CE} = 0V, V_{GE} = ± 20V			±100	nA
$V_{CE(sat)}$	I_C = 30A, V_{GE} = 15V, Note 1		1.5	1.8	V

Features

- Optimized for Low Conduction and Switching Losses
- Square RBSOA
- International Standard Package

Advantages

- High Power Density
- Low Gate Drive Requirement

Applications

- Power Inverters
- UPS
- Motor Drives
- SMPS
- PFC Circuits
- Battery Chargers
- Welding Machines
- Lamp Ballasts

© 2010 IXYS CORPORATION, All Rights Reserved

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	I_C = 30A, V_{CE} = 10V, Note 1	28	42		S
C_{ies}	V_{CE} = 25V, V_{GE} = 0V, f = 1MHz		2280		pF
C_{oes}			120		pF
C_{res}			32		pF
Q_g	I_C = 30A, V_{GE} = 15V, V_{CE} = 0.5 • V_{CES}		80		nC
Q_{ge}			12		nC
Q_{gc}			36		nC
$t_{d(on)}$	**Inductive Load, T_J = 25°C**		19		ns
t_{ri}			24		ns
E_{on}	I_C = 30A, V_{GE} = 15V		0.54		mJ
$t_{d(off)}$	V_{CE} = 400V, R_G = 5Ω		125	200	ns
t_{fi}			100	160	ns
E_{off}			0.8	1.5	mJ
$t_{d(on)}$	**Inductive Load, T_J = 125°C**		19		ns
t_{ri}			26		ns
E_{on}	I_C = 30A, V_{GE} = 15V		0.9		mJ
$t_{d(off)}$	V_{CE} = 400V, R_G = 5Ω		180		ns
t_{fi}			170		ns
E_{off}			1.5		mJ
R_{thJC}				0.50	°C/W
R_{thCS}			0.21		°C/W

TO-247 Outline (IXGH)

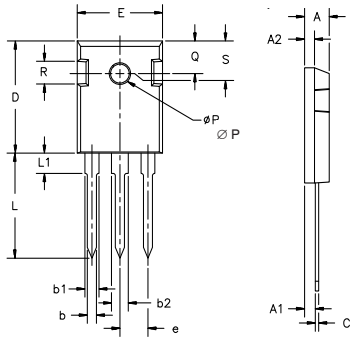

Terminals: 1 - Gate 2 - Collector
3 - Emitter

Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.7	5.3	.185	.209
A_1	2.2	2.54	.087	.102
A_2	2.2	2.6	.059	.098
b	1.0	1.4	.040	.055
b_1	1.65	2.13	.065	.084
b_2	2.87	3.12	.113	.123
C	.4	.8	.016	.031
D	20.80	21.46	.819	.845
E	15.75	16.26	.610	.640
e	5.20	5.72	0.205	0.225
L	19.81	20.32	.780	.800
L1		4.50		.177
∅P	3.55	3.65	.140	.144
Q	5.89	6.40	0.232	0.252
R	4.32	5.49	.170	.216
S	6.15 BSC		242 BSC	

Note 1. Pulse test, t ≤ 300μs, duty cycle, d ≤ 2%.

ADVANCE TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from a subjective evaluation of the design, based upon prior knowledge and experience, and constitute a "considered reflection" of the anticipated result. IXYS reserves the right to change limits, test conditions, and dimensions without notice.

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or moreof the following U.S. patents: 4,835,592 4,850,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405 B2 6,710,463 6,727,585 6,759,692 6,771,478 B2 7,005,734 B2 7,063,975 B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ T_J = 25ºC

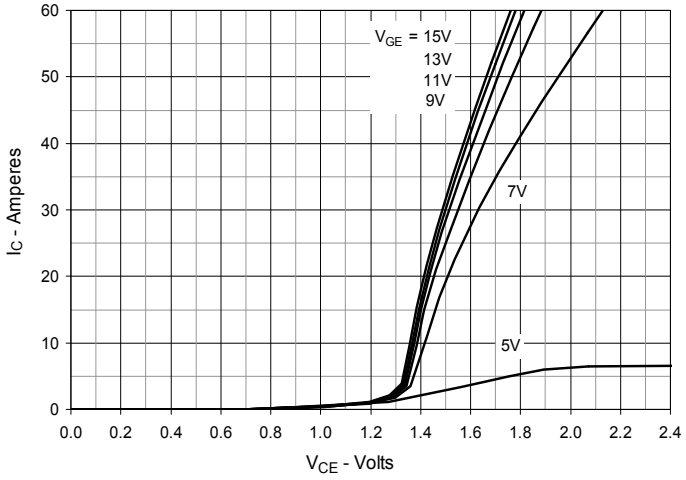

Fig. 2. Extended Output Characteristics @ T_J = 25ºC

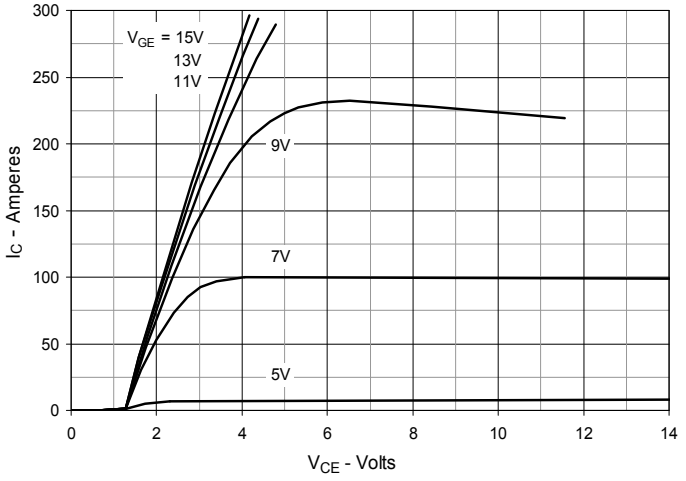

Fig. 3. Output Characteristics @ T_J = 125ºC

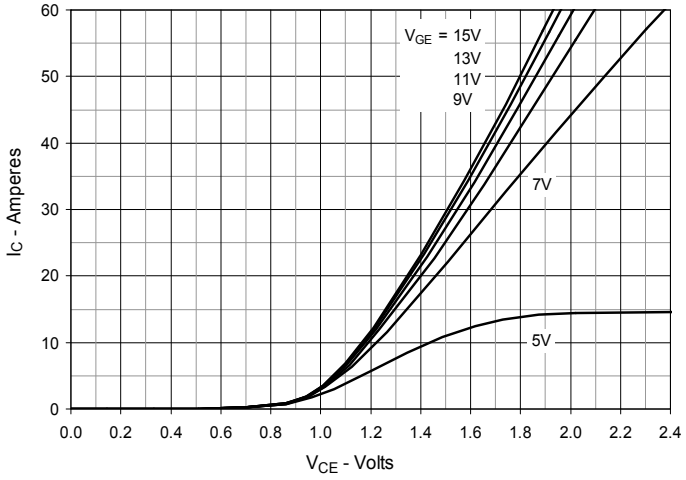

Fig. 4. Dependence of $V_{CE(sat)}$ on Junction Temperature

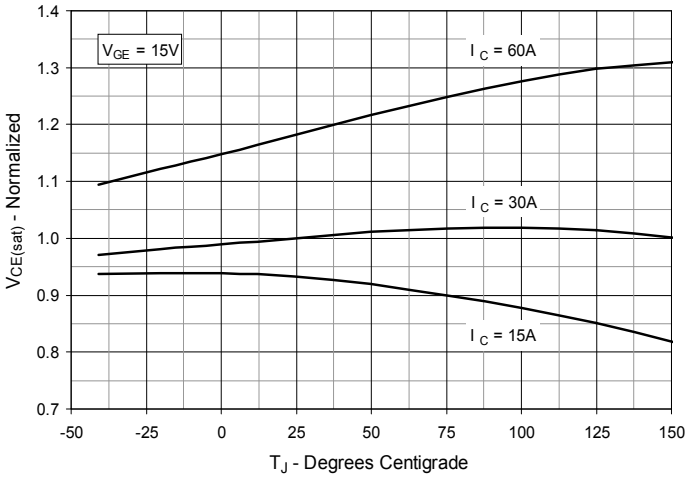

Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter Voltage

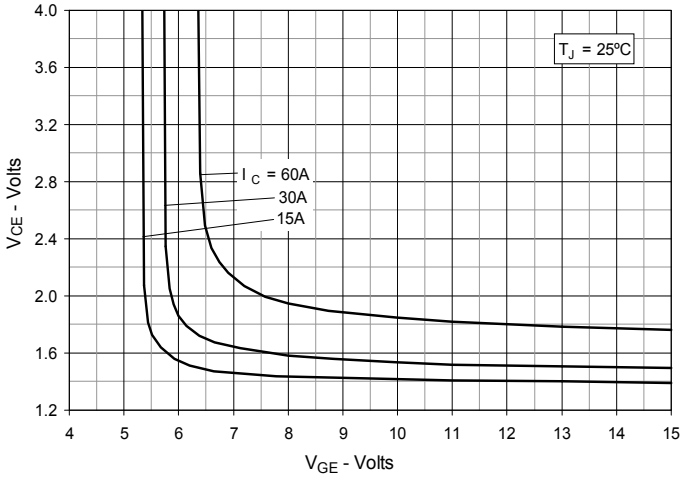

Fig. 6. Input Admittance

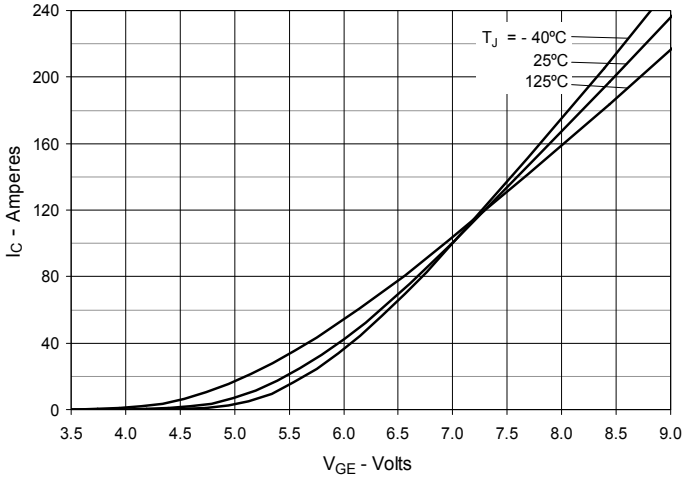

© 2010 IXYS CORPORATION, All Rights Reserved

Fig. 7. Transconductance

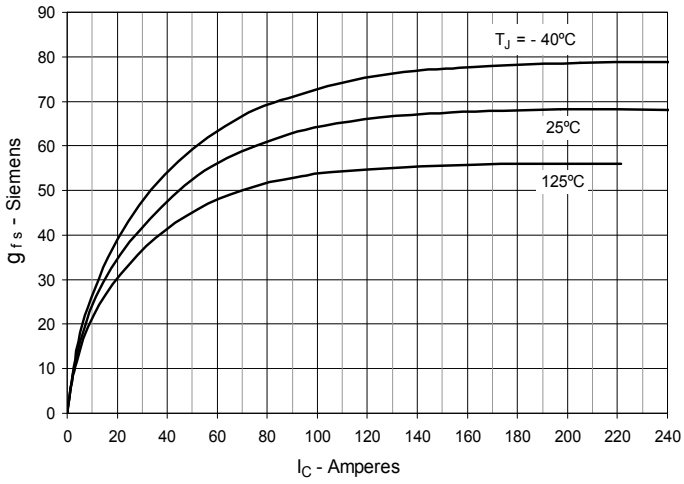

Fig. 8. Gate Charge

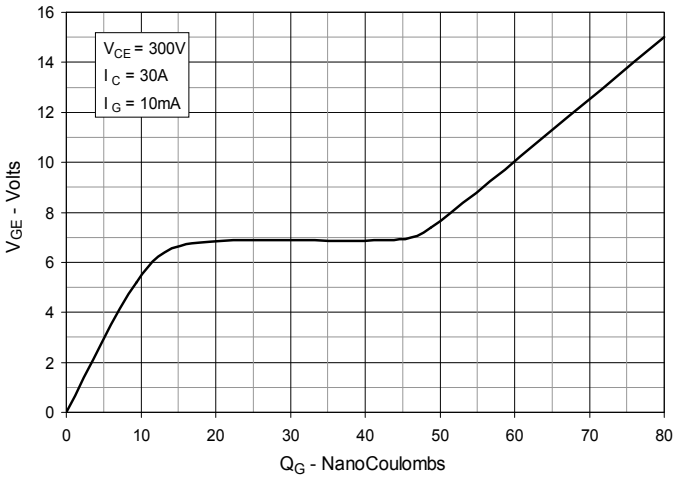

Fig. 9. Capacitance

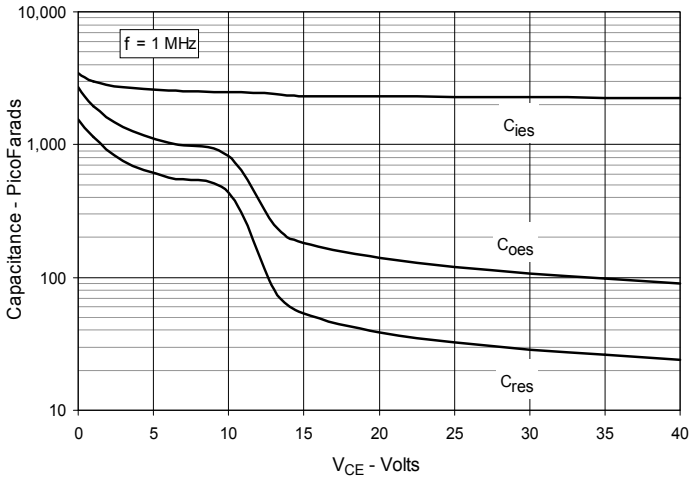

Fig. 10. Reverse-Bias Safe Operating Area

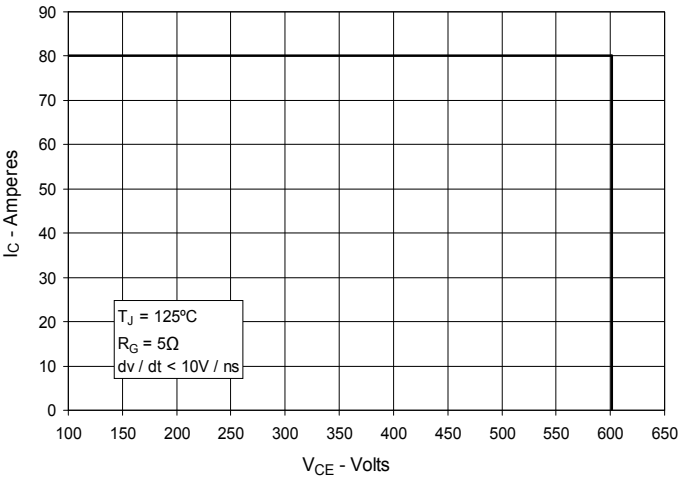

Fig. 11. Maximum Transient Thermal Impedance

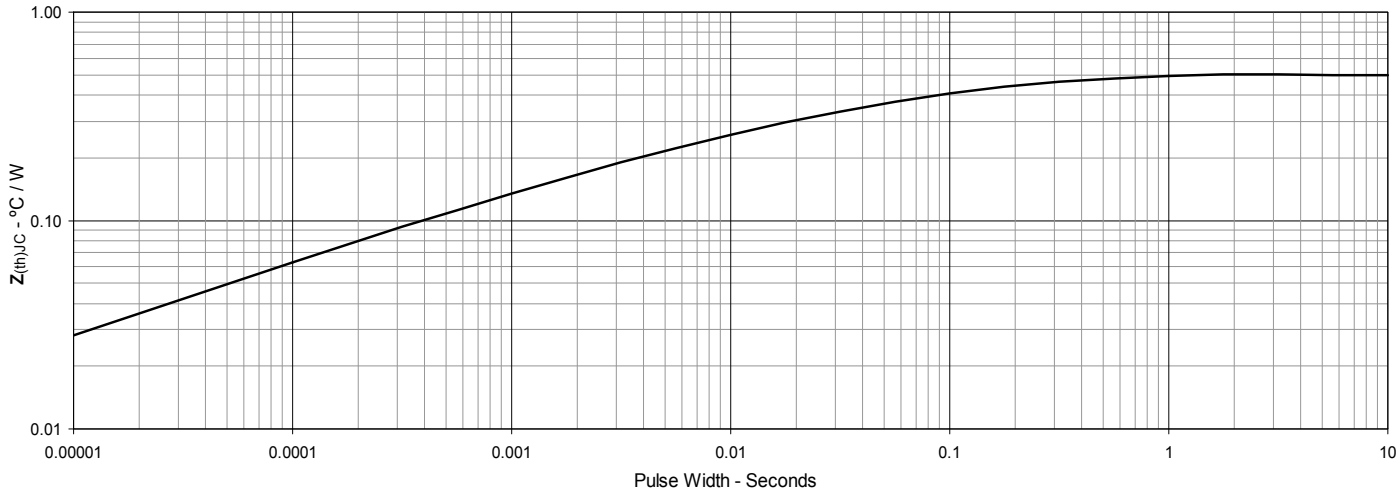

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 12. Inductive Switching Energy Loss vs. Gate Resistance

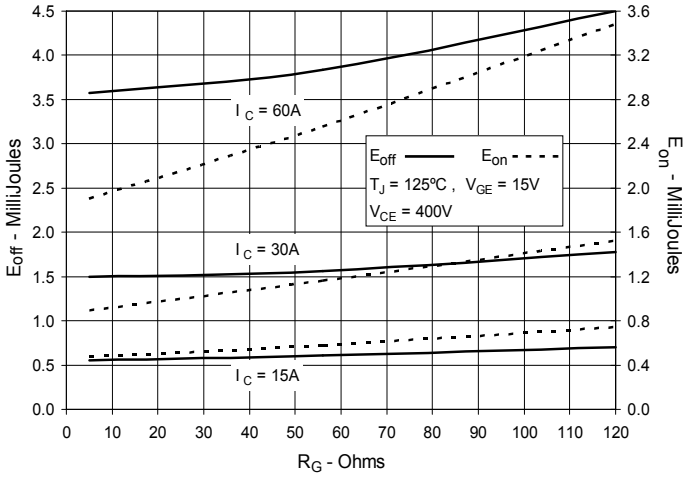

Fig. 13. Inductive Switching Energy Loss vs. Collector Current

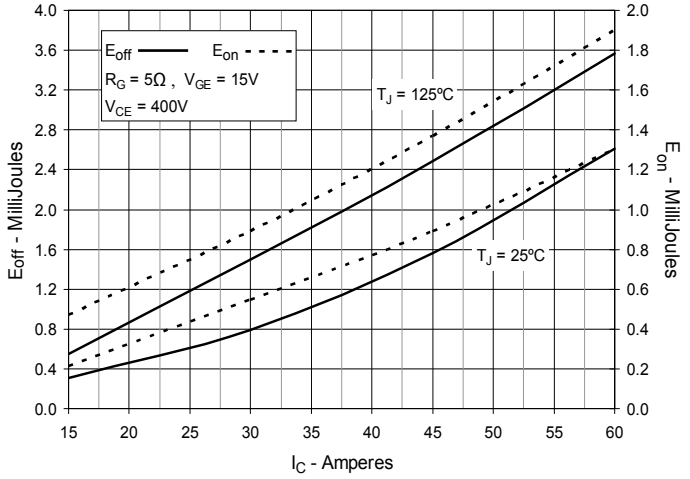

Fig. 14. Inductive Switching Energy Loss vs. Junction Temperature

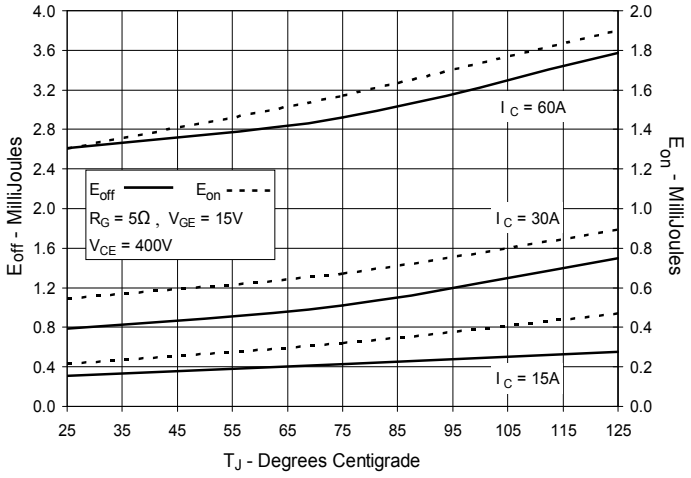

Fig. 15. Inductive Turn-off Switching Times vs. Gate Resistance

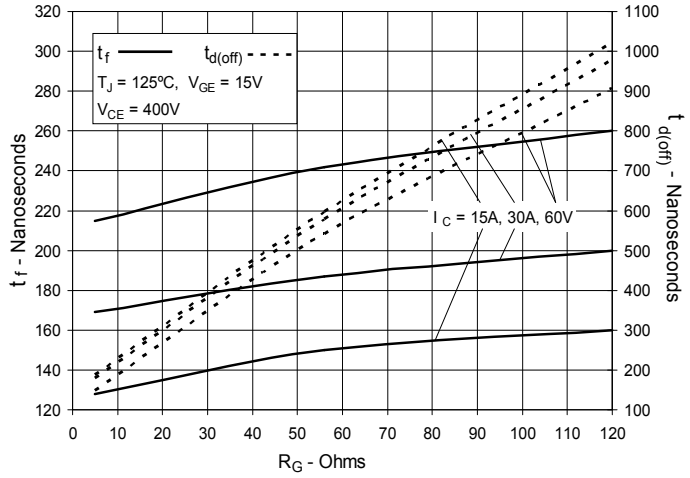

Fig. 16. Inductive Turn-off Switching Times vs. Collector Current

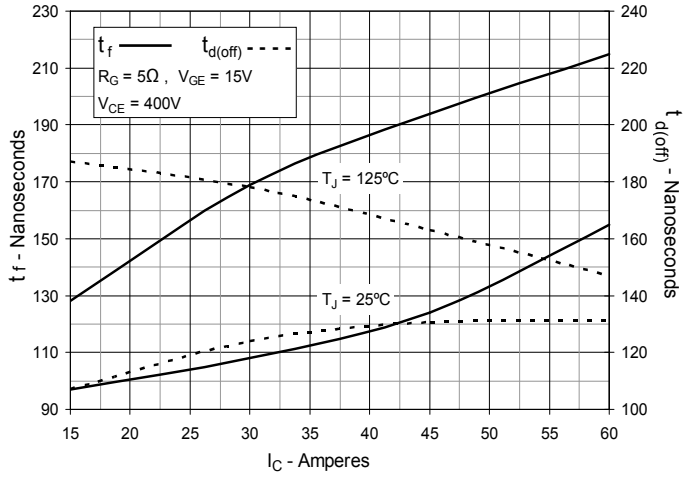

Fig. 17. Inductive Turn-off Switching Times vs. Junction Temperature

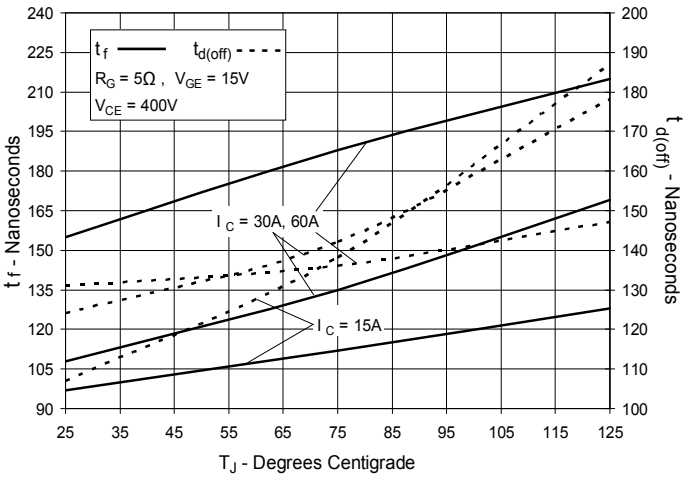

© 2010 IXYS CORPORATION, All Rights Reserved

Fig. 18. Inductive Turn-on Switching Times vs. Gate Resistance

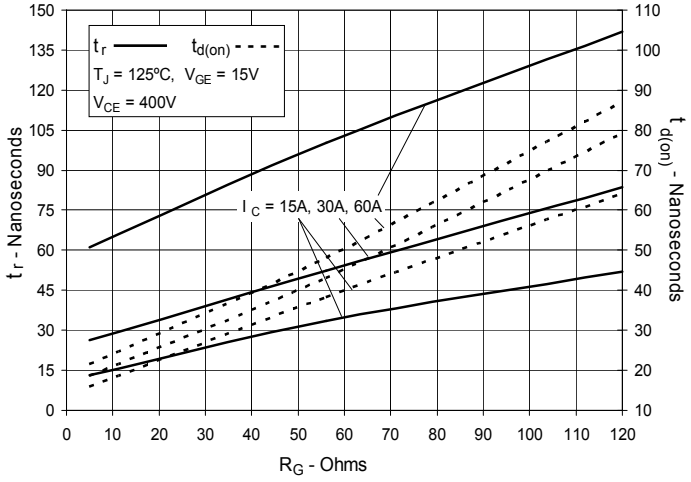

Fig. 19. Inductive Turn-on Switching Times vs. Collector Current

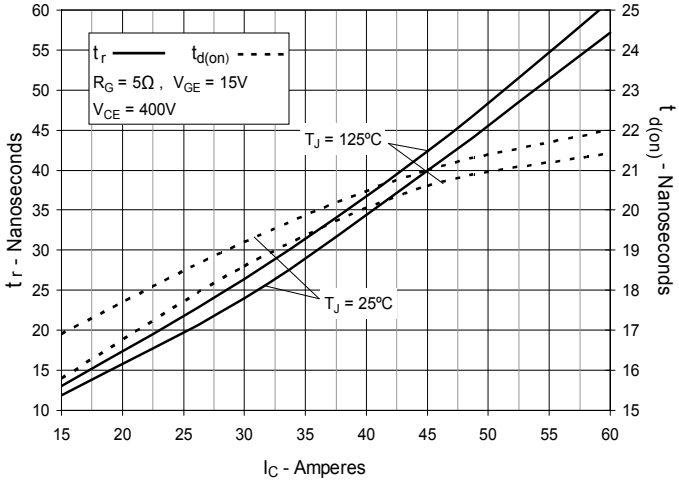

Fig. 20. Inductive Turn-on Switching Times vs. Junction Temperature

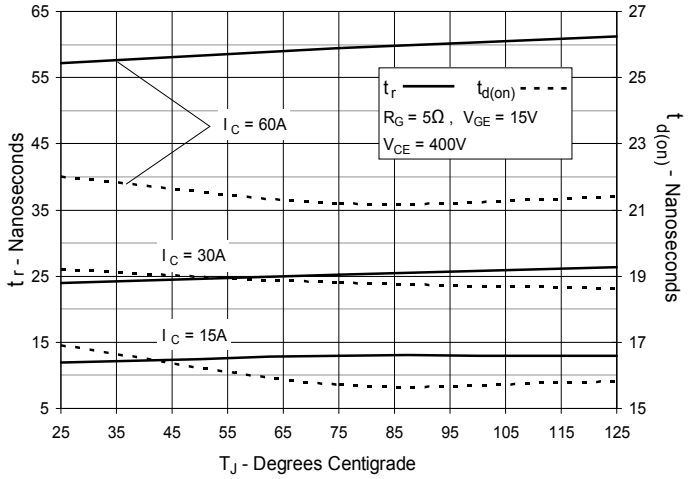



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.