

CoolMOS™ 1) Power MOSFET

V_{DSS} = 600 V
I_{D25} = 15 A
$R_{DS(on)\ max}$ = 190 mΩ

Electrically isolated back surface
2500 V electrical isolation
N-Channel Enhancement Mode
Low R_{DSon}, high V_{DSS} MOSFET
Ultra low gate charge



ISOPLUS220™

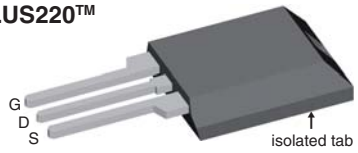

E72873

MOSFET			
Symbol	**Conditions**	**Maximum Ratings**	
V_{DSS}	T_{VJ} = 25°C	600	V
V_{GS}		± 20	V
I_{D25}	T_C = 25°C	15	A
I_{D90}	T_C = 90°C	10.5	A
E_{AS}	single pulse; I_D = 10 A; T_C = 25°C	690	mJ
E_{AR}	repetitive; I_D = 20 A; T_C = 25°C	1	mJ

Symbol	**Conditions**	**Characteristic Values** (T_{VJ} = 25°C, unless otherwise specified)			
		min.	**typ.**	**max.**	
R_{DSon}	V_{GS} = 10 V; I_D = 16 A		160	190	mΩ
$V_{GS(th)}$	V_{DS} = V_{GS}; I_D = 1 mA	2.1		3.9	V
I_{DSS}	V_{DS} = 600 V; V_{GS} = 0 V T_{VJ} = 25°C			25	µA
	T_{VJ} = 150°C			250	µA
I_{GSS}	V_{GS} = ± 20 V; V_{DS} = 0 V			100	nA
C_{iss}	V_{GS} = 0 V; V_{DS} = 25 V		2400		pF
C_{oss}	f = 1 MHz		780		pF
Q_g	V_{GS} = 0 to 10 V; V_{DS} = 350 V; I_D = 20 A		87	114	nC
Q_{gs}			11		nC
Q_{gd}			33		nC
$t_{d(on)}$	V_{GS} = 13 V; V_{DS} = 380 V		10		ns
t_r	I_D = 21 A; R_G = 3.3 Ω; T_{VJ} = 125°C		5		ns
$t_{d(off)}$			67		ns
t_f			4.5		ns
R_{thJC}				1	K/W

Features

- Silicon chip on Direct-Copper-Bond substrate
  - high power dissipation
  - isolated mounting surface
  - 2500 V electrical isolation
  - low drain to tab capacitance (< 30 pF)
- CoolMOS™ 1) power MOSFET
  - 3rd generation
  - high blocking capability
  - lowest resistance
  - avalanche rated for unclamped inductive switching (UIS)
  - low thermal resistance due to reduced chip thickness
- Enhanced total power density

Applications

- Switched mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)
- Power factor correction (PFC)
- Welding
- Inductive heating
- PDP and LCD adapter

Advantages

- Easy assembly: no screws or isolation foils required
- Space savings
- High power density
- High reliability

1) CoolMOS™ is a trademark of Infineon Technologies AG.

IXYS reserves the right to change limits, test conditions and dimensions.

© 2008 IXYS All rights reserved

Source-Drain Diode

Symbol	Conditions	Characteristic Values (T_{VJ} = 25°C, unless otherwise specified)			
		min.	typ.	max.	
I_S	V_{GS} = 0 V			20	A
V_{SD}	I_F = 16 A; V_{GS} = 0 V		0.9	1.2	V
t_{rr}	I_F = 20 A; -di_F/dt = 100 A/µs; V_R = 480 V		500	800	ns
Q_{RM}			11		µC
I_{RM}			70		A

Component


Symbol	Conditions	Maximum Ratings	
T_{VJ}	operating	-55...+150	°C
T_{stg}	storage	-55...+150	°C
V_{ISOL}	RMS leads-to-tab, 50/60 Hz, f = 1 minute	2500	V~
F_C	mounting force	11-65 / 2.4-11	N/lb

Symbol	Conditions	Characteristic Values			
		min.	typ.	max.	
R_{thCH}	with heatsink compound		0.3		K/W
Weight			2.7		g

IXYS reserves the right to change limits, test conditions and dimensions.

© 2008 IXYS All rights reserved

ISOPLUS220™ Outline

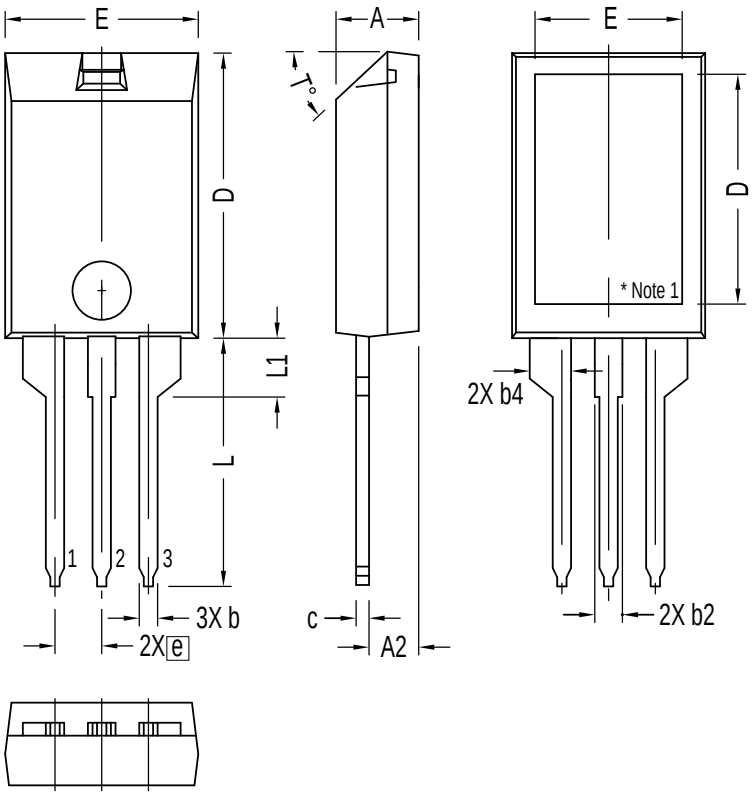

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.157	.197	4.00	5.00
A2	.098	.118	2.50	3.00
b	.035	.051	0.90	1.30
b2	.049	.065	1.25	1.65
b4	.093	.100	2.35	2.55
c	.028	.039	0.70	1.00
D	.591	.630	15.00	16.00
D1	.472	.512	12.00	13.00
E	.394	.433	10.00	11.00
E1	.295	.335	7.50	8.50
e	.100 BASIC		2.55 BASIC	
L	.512	.571	13.00	14.50
L1	.118	.138	3.00	3.50
T°			42.5°	47.5°

NOTE:
1. Bottom heatsink is electrically isolated from Pin 1, 2, or 3.
2. This drawing will meet dimensional requirement of JEDEC SS Product Outline TO-273 except D and D1 dimension.

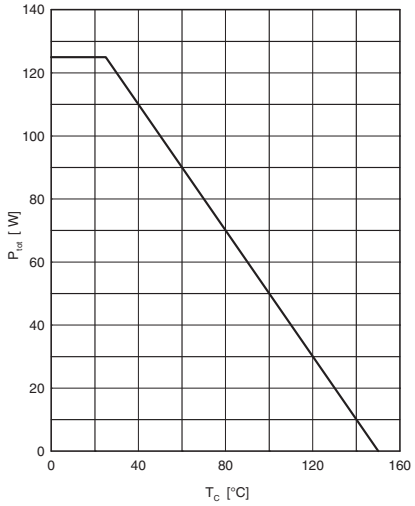


Fig. 1 Power dissipation

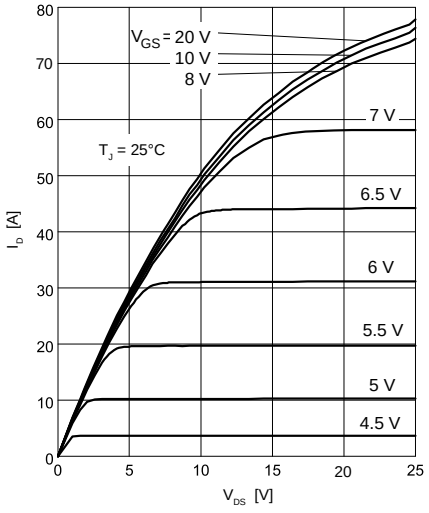


Fig. 2 Typ. output characteristics

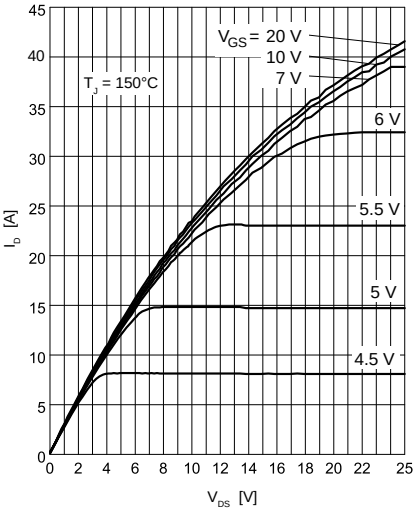


Fig. 3 Typ. output characteristics

© 2008 IXYS All rights reserved

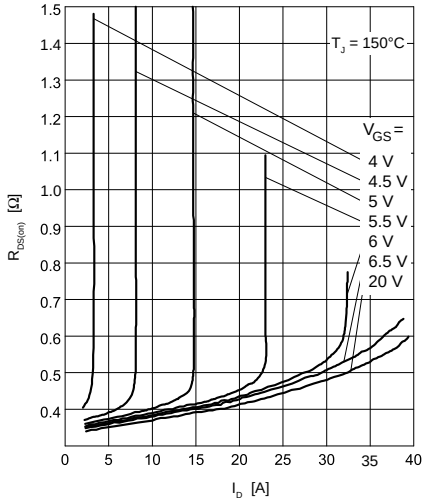


Fig. 4 Typ. drain-source on-state resistance

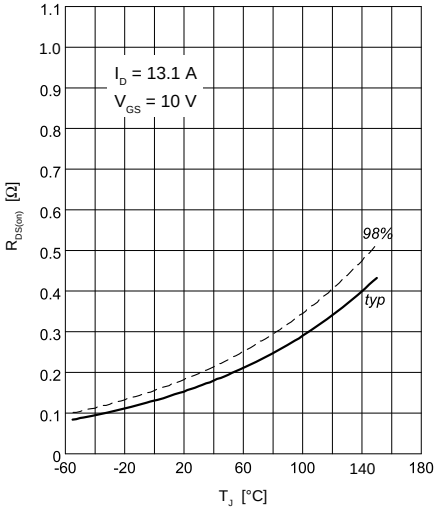


Fig. 5 Drain-source on-state resistance

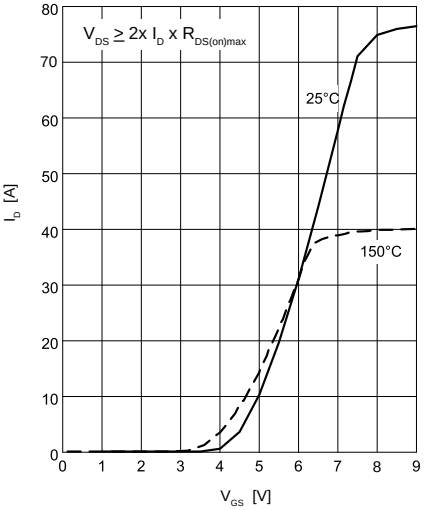


Fig. 6 Typ. transfer characteristics

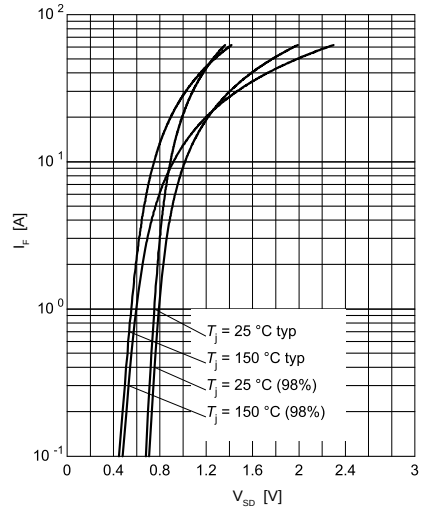


Fig. 7 Forward characteristic of reverse diode

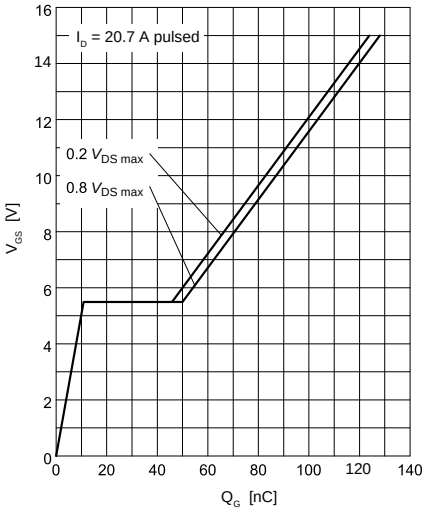


Fig. 8 Typ. gate charge

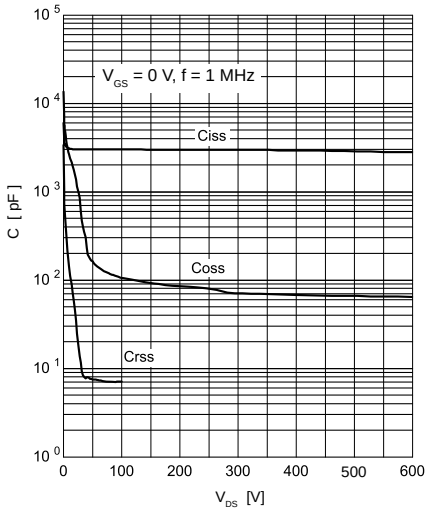


Fig. 9 Typ. capacitances

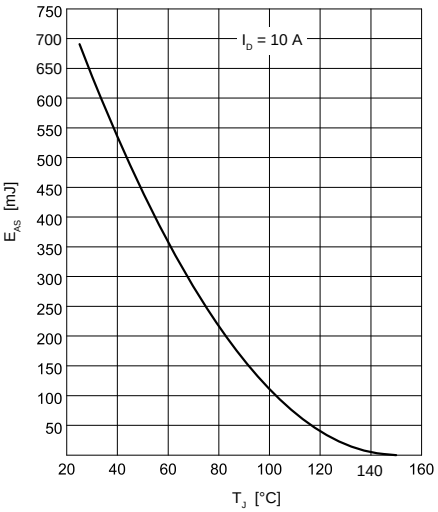


Fig. 10 Avalanche energy

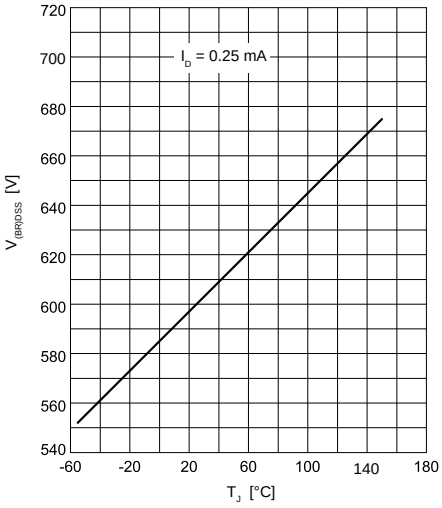


Fig. 11 Drain-source breakdown voltage

IXYS reserves the right to change limits, test conditions and dimensions.

© 2008 IXYS All rights reserved



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.