IXYS


Preliminary Technical Information

X-Class Power MOSFET


IXTP32N65X
IXTQ32N65X
IXTH32N65X

V_{DSS} = 650V
I_{D25} = 32A
$R_{DS(on)}$ ≤ 135mΩ


N-Channel Enhancement Mode




TO-220AB (IXTP)



TO-3P (IXTQ)



TO-247 (IXTH)



G = Gate D = Drain
S = Source Tab = Drain

Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C	650	V
V_{DGR}	T_J = 25°C to 150°C, R_{GS} = 1MΩ	650	V
V_{GSS}	Continuous	±30	V
V_{GSM}	Transient	±40	V
I_{D25}	T_C = 25°C	32	A
I_{DM}	T_C = 25°C, Pulse Width Limited by T_{JM}	64	A
dv/dt	$I_S \le I_{D25}$, $V_{DD} \le V_{DSS}$, $T_J \le 150°C$	30	V/ns
P_D	T_C = 25°C	500	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
T_L	Maximum Lead Temperature for Soldering	300	°C
T_{SOLD}	1.6 mm (0.062in.) from Case for 10s	260	°C
M_d	Mounting Torque	1.13 / 10	Nm/lb.in
Weight	TO-220	3.0	g
	TO-3P	5.5	g
	TO-247	6.0	g

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0V, I_D = 250μA	650			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 250μA	3.0		5.5	V
I_{GSS}	V_{GS} = ±30V, V_{DS} = 0V			±100	nA
I_{DSS}	$V_{DS} = V_{DSS}$, V_{GS} = 0V			5	μA
	T_J = 125°C			50	μA
$R_{DS(on)}$	V_{GS} = 10V, $I_D = 0.5 \bullet I_{D25}$, Note 1			135	mΩ

Features

- Low $R_{DS(ON)}$ and Q_G
- Low Package Inductance
- Fast Intrinsic Rectifier

Advantages

- High Power Density
- Easy to Mount
- Space Savings

Applications

- Switch-Mode and Resonant-Mode Power Supplies
- DC-DC Converters
- PFC Circuits
- AC and DC Motor Drives
- Robotics and Servo Controls

© 2015 IXYS CORPORATION, All Rights Reserved

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max	
g_{fs}	V_{DS} = 10V, I_D = 0.5 • I_{D25}, Note 1	13	22		S
R_{Gi}	Gate Input Resistance		2.6		Ω
C_{iss}	V_{GS} = 0V, V_{DS} = 25V, f = 1MHz		2205		pF
C_{oss}			1600		pF
C_{rss}			30		pF
	Effective Output Capacitance				
$C_{o(er)}$	Energy related; V_{GS} = 0V, V_{DS} = 0.8 • V_{DSS}		111		pF
$C_{o(tr)}$	Time related; V_{GS} = 0V, V_{DS} = 0.8 • V_{DSS}		349		pF
$t_{d(on)}$	**Resistive Switching Times**		23		ns
t_r	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		49		ns
$t_{d(off)}$	R_G = 5Ω (External)		58		ns
t_f			28		ns
$Q_{g(on)}$	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		54		nC
Q_{gs}			12		nC
Q_{gd}			29		nC
R_{thJC}				0.25	°C/W
R_{thCS}	TO-220		0.50		°C/W
	TO-247 & TO-3P		0.25		°C/W

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max	
I_S	V_{GS} = 0V			32	A
I_{SM}	Repetitive, pulse Width Limited by T_{JM}			128	A
V_{SD}	I_F = I_S, V_{GS} = 0V, Note 1			1.4	V
t_{rr}	I_F = 16A, -di/dt = 100A/μs		400		ns
Q_{RM}	V_R = 100V		6.1		μC
I_{RM}			31		A

Note 1. Pulse test, t ≤ 300μs, duty cycle, d ≤ 2%.

PRELIMANARY TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from a subjective evaluation of the design, based upon prior knowledge and experience, and constitute a "considered reflection" of the anticipated result. IXYS reserves the right to change limits, test conditions, and dimensions without notice.

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,860,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123B1 6,306,728B1 6,404,065B1 6,534,343 6,583,505 6,683,344 6,710,405B2 6,710,463 6,727,585 6,759,692 6,771,478B2 7,005,734B2 7,063,975B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ T_J = 25ºC

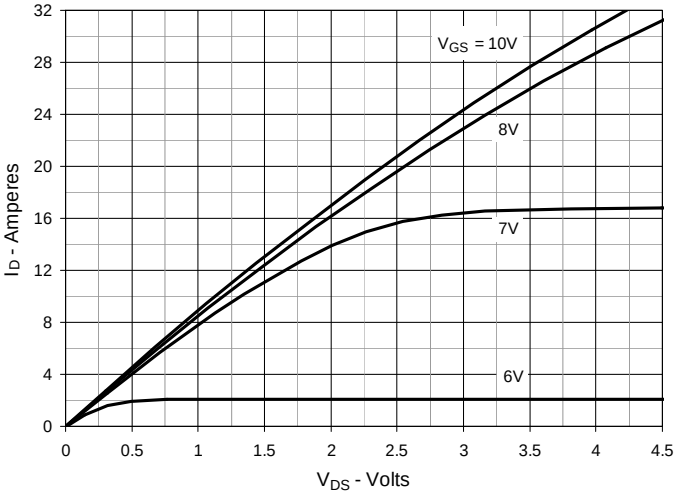


Fig. 2. Extended Output Characteristics @ T_J = 25ºC

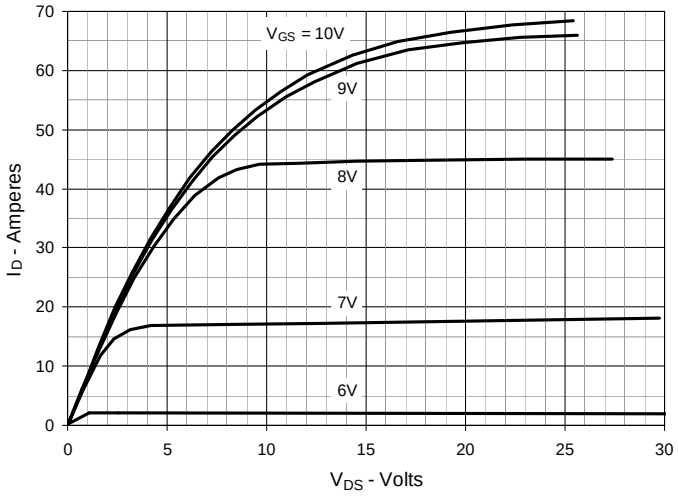


Fig. 3. Output Characteristics @ T_J = 125ºC

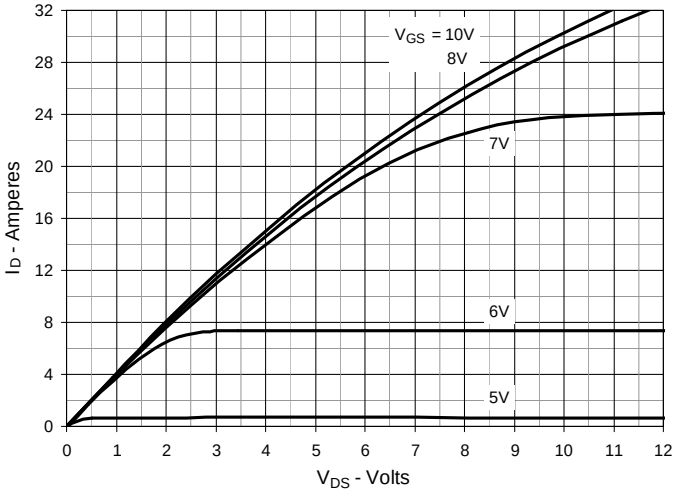


Fig. 4. $R_{DS(on)}$ Normalized to I_D = 16A Value vs. Junction Temperature

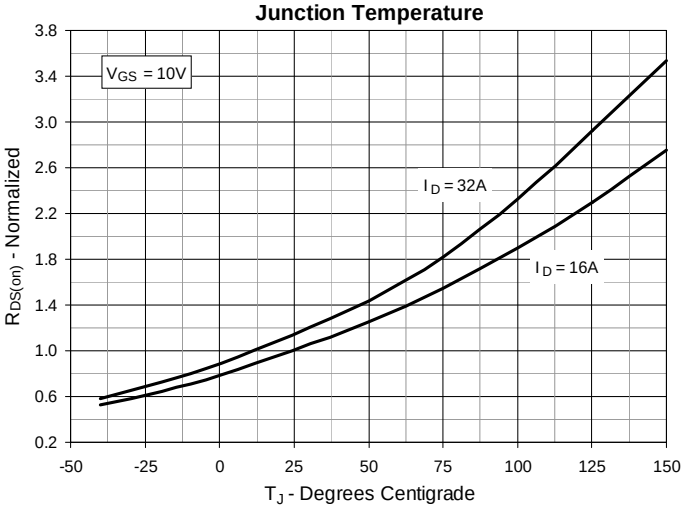


Fig. 5. $R_{DS(on)}$ Normalized to I_D = 16A Value vs. Drain Current


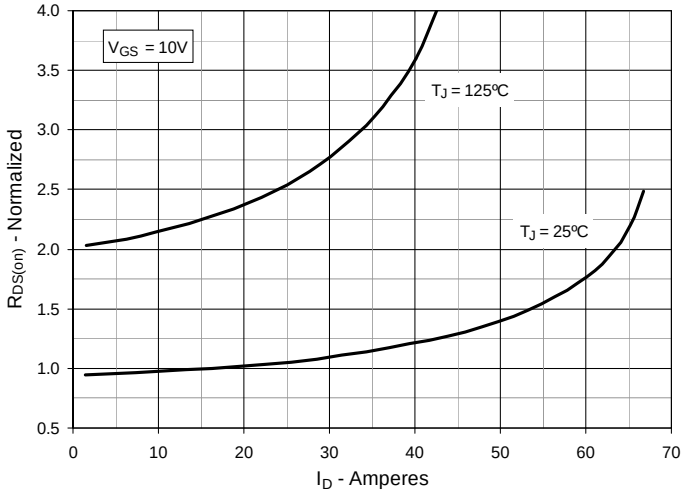


Fig. 6. Normalized Breakdown & Threshold Voltages vs. Junction Temperature

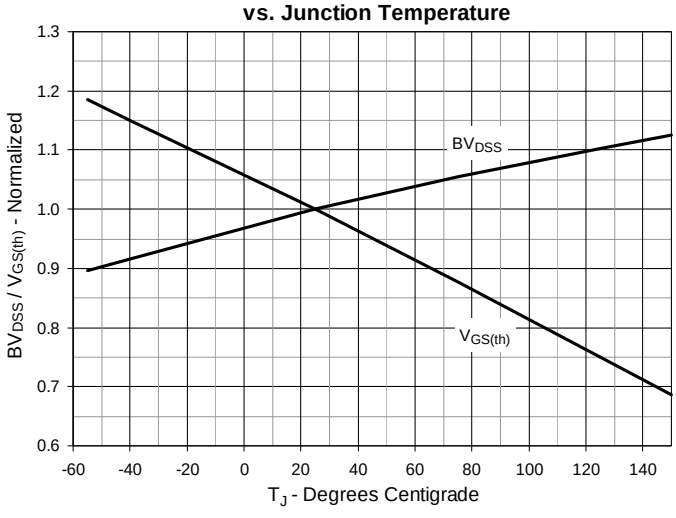

© 2015 IXYS CORPORATION, All Rights Reserved

Fig. 7. Maximum Drain Current vs. Case Temperature

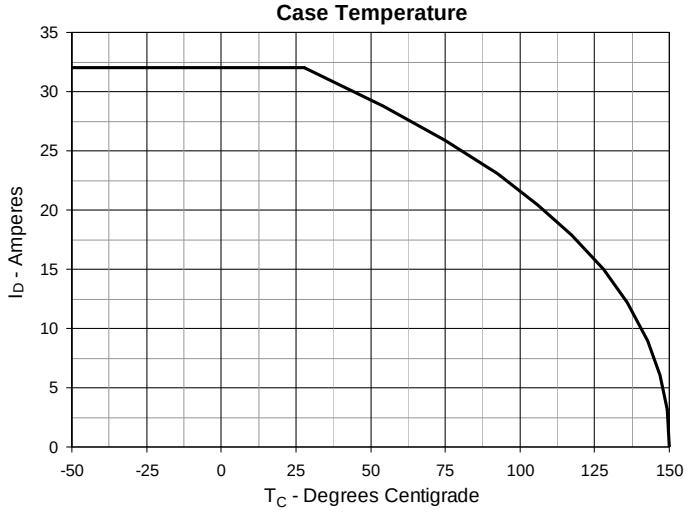


Fig. 8. Input Admittance

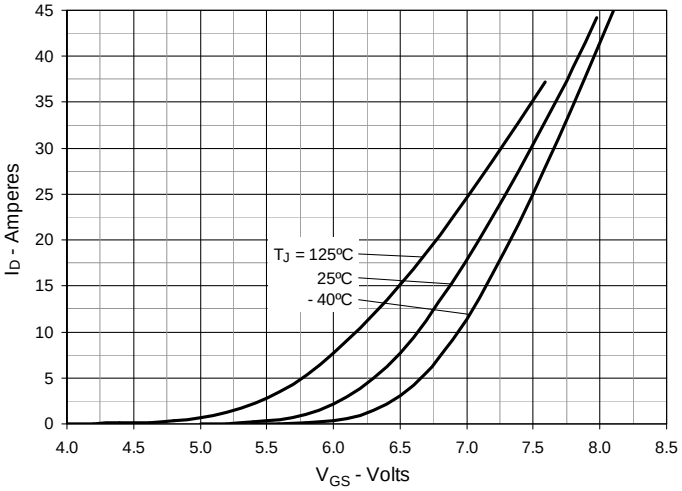


Fig. 9. Transconductance

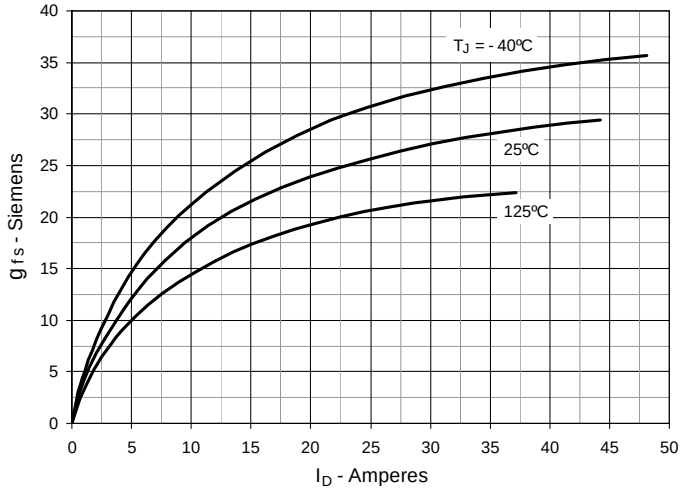


Fig. 10. Forward Voltage Drop of Intrinsic Diode

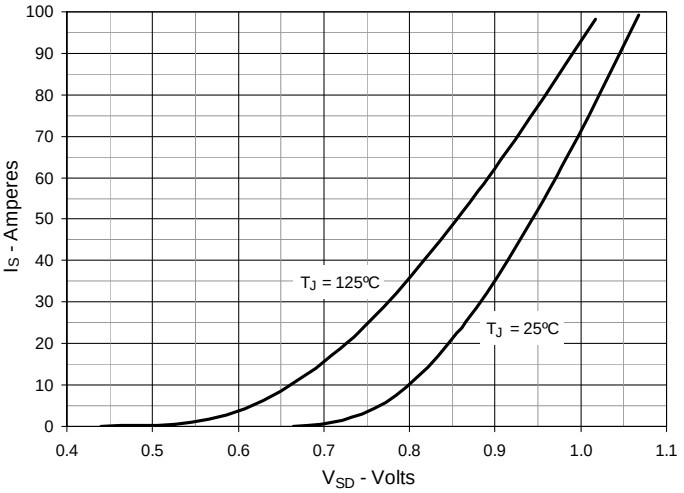


Fig. 11. Gate Charge


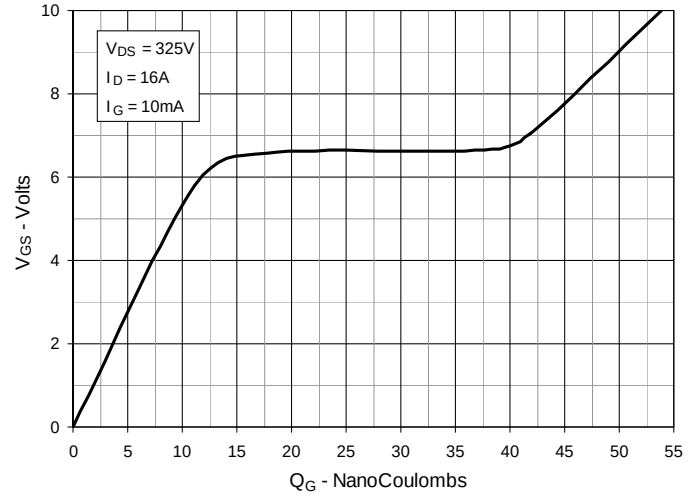


Fig. 12. Capacitance

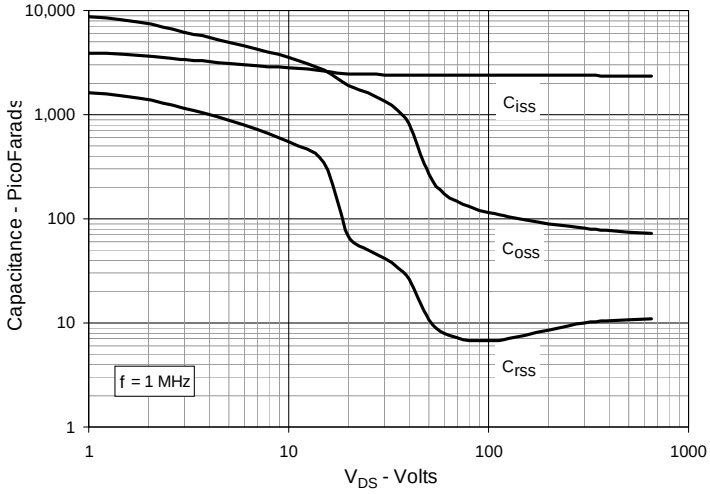

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 13. Output Capacitance Stored Energy

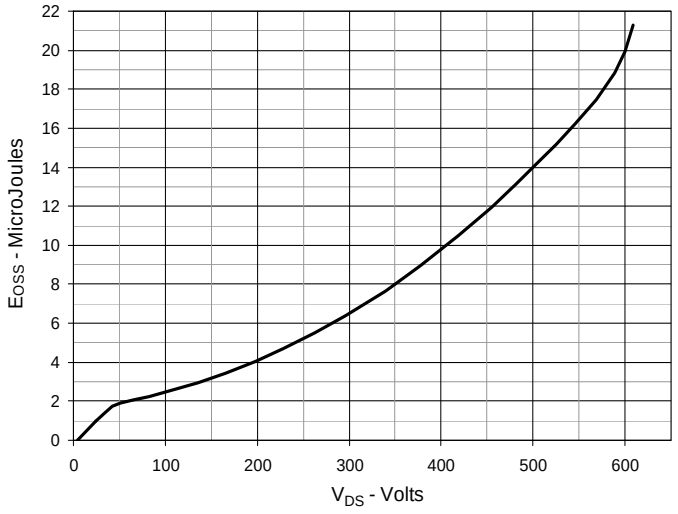


Fig. 14. Forward-Bias Safe Operating Area



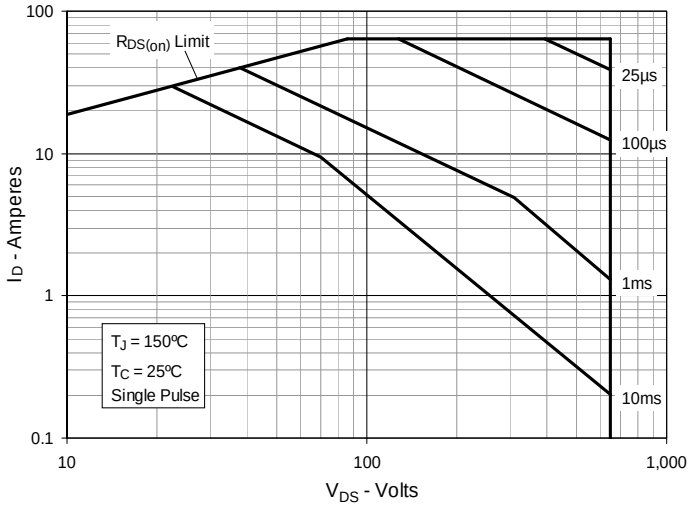


Fig. 15. Maximum Transient Thermal Impedance

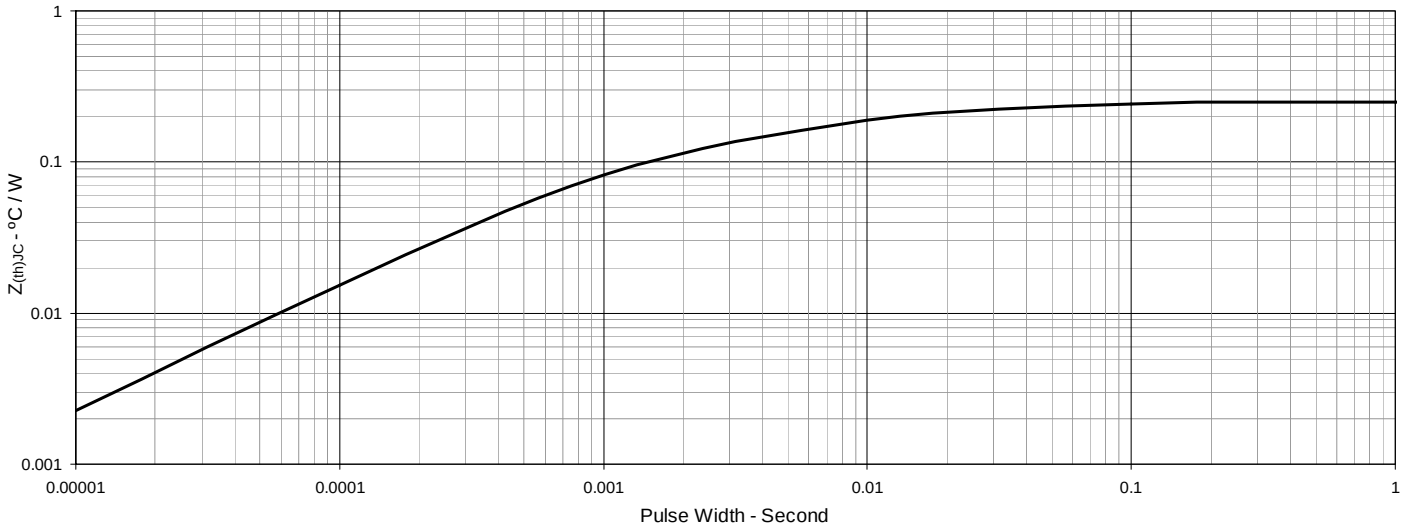

© 2015 IXYS CORPORATION, All Rights Reserved


TO-220 Outline

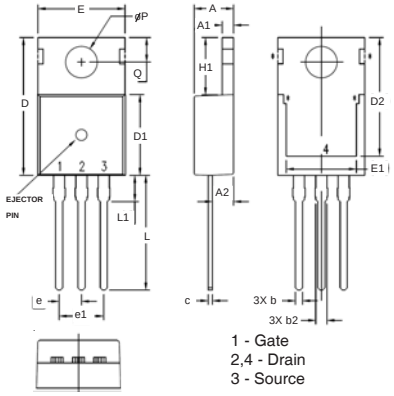

1 - Gate
2,4 - Drain
3 - Source

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.169	.185	4.30	4.70
A1	.047	.055	1.20	1.40
A2	.079	.106	2.00	2.70
b	.024	.039	0.60	1.00
b2	.045	.057	1.15	1.45
c	.014	.026	0.35	0.65
D	.587	.626	14.90	15.90
D1	.335	.370	8.50	9.40
(D2)	.500	.531	12.70	13.50
E	.382	.406	9.70	10.30
(E1)	.283	.323	7.20	8.20
e	.100 BSC		2.54 BSC	
e1	.200 BSC		5.08 BSC	
H1	.244	.268	6.20	6.80
L	.492	.547	12.50	13.90
L1	.110	.154	2.80	3.90
ØP	.134	.150	3.40	3.80
Q	.106	.126	2.70	3.20


TO-3P Outline



PINS: 1 - Gate
2, 4 - Drain
3 - Source

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.185	.193	4.70	4.90
A1	.051	.059	1.30	1.50
A2	.057	.065	1.45	1.65
b	.035	.045	0.90	1.15
b2	.075	.087	1.90	2.20
b4	.114	.126	2.90	3.20
c	.022	.031	0.55	0.80
D	.780	.799	19.80	20.30
D1	.665	.677	16.90	17.20
E	.610	.622	15.50	15.80
E1	.531	.539	13.50	13.70
e	.215 BSC		5.45 BSC	
L	.779	.795	19.80	20.20
L1	.134	.142	3.40	3.60
øP	.126	.134	3.20	3.40
øP1	.272	.280	6.90	7.10
S	.193	.201	4.90	5.10

TO-247 Outline

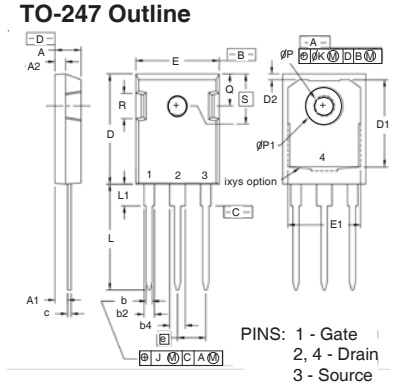

PINS: 1 - Gate
2, 4 - Drain
3 - Source

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.190	.205	4.83	5.21
A1	.090	.100	2.29	2.54
A2	.075	.085	1.91	2.16
b	.045	.055	1.14	1.40
b2	.075	.087	1.91	2.20
b4	.115	.126	2.92	3.20
C	.024	.031	0.61	0.80
D	.819	.840	20.80	21.34
D1	.650	.690	16.51	17.53
D2	.035	.050	0.89	1.27
E	.620	.635	15.75	16.13
E1	.545	.565	13.84	14.35
e	.215 BSC		5.45 BSC	
J	--	.010	--	0.25
K	--	.025	--	0.64
L	.780	.810	19.81	20.57
L1	.150	.170	3.81	4.32
øP	.140	.144	3.55	3.65
øP1	.275	.290	6.99	7.37
Q	.220	.244	5.59	6.20
R	.170	.190	4.32	4.83
S	.242 BSC		6.15 BSC	

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.