



Specification for LCD Glass Panel


JAZZ-AC-G


Revision A



JAZZ	2.7" COG Type Graphic LCD
AC	Serial AC, Dimension 69.10 × 46.40 × 2.90 mm
G	STN Positive Gray
/	Resolution 128 x 64
/	Transflective
/	6 o'clock Viewing Direction
/	Top: -20~+70°C; Tstr: -30~+80°C
/	RoHS Compliant
/	FPC Connection
/	Controller ST7567
/	Pair with Backlight JAZZ-AE



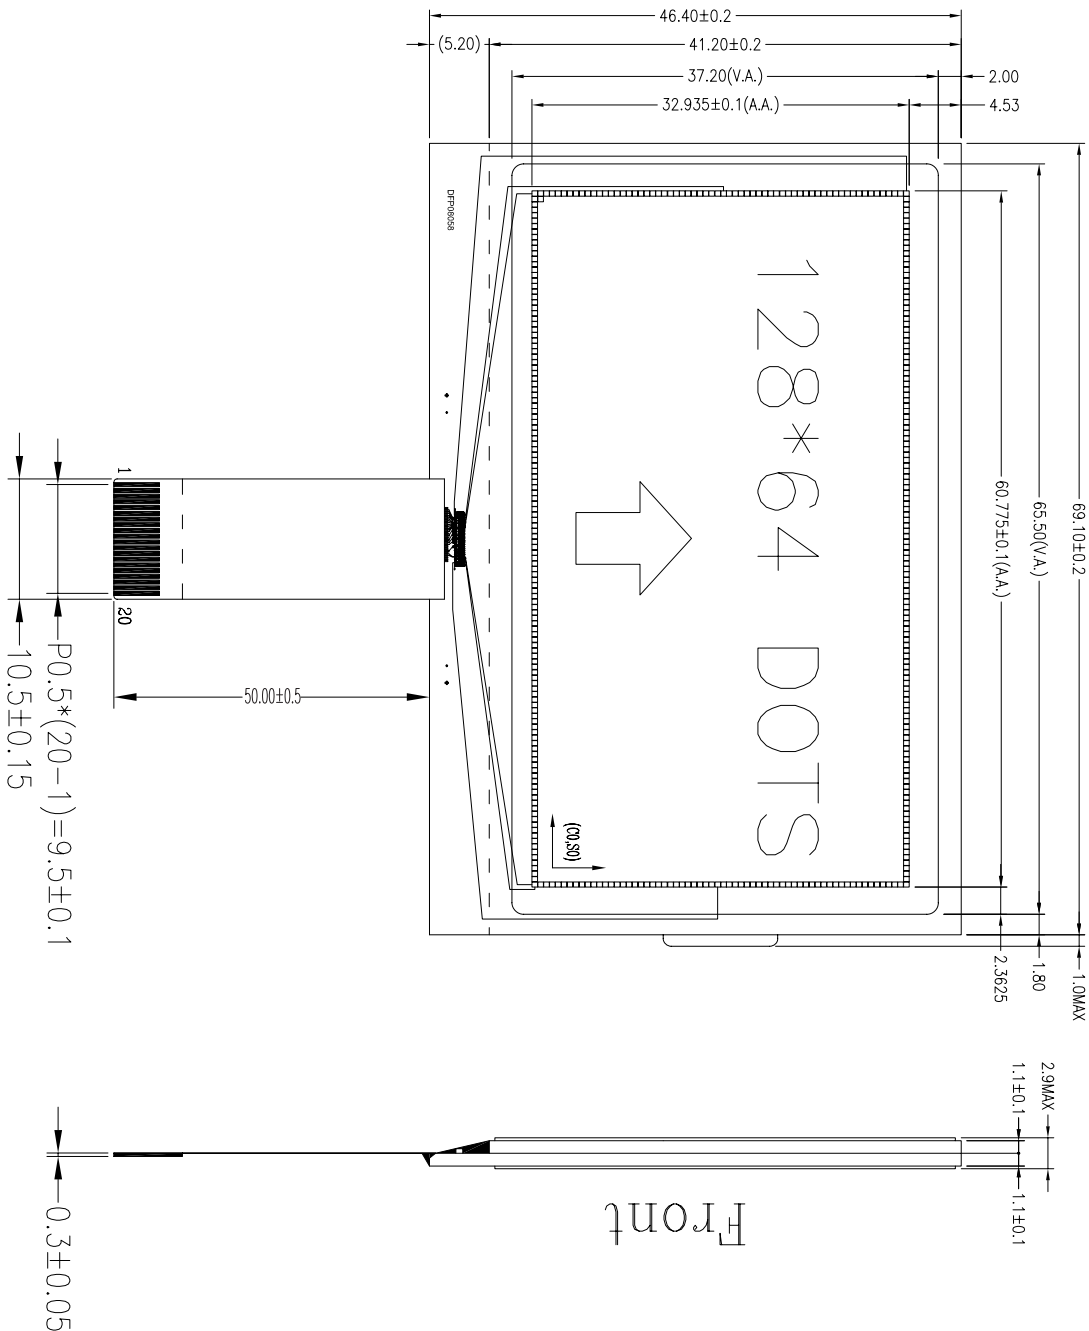


		
DRAWN:	CHECKED:	
APPROVED:		
LCM NO: JAZZ-AC-G	Rev: 00	UNITS: mm
DWG NO: JAZZ-AC-G	SHEET 1 OF 2	
		

2			
1			
NO	Part Name	Quantity	
	LCD	1	

CUSTOMER
APPROVAL:

Block Diagram:

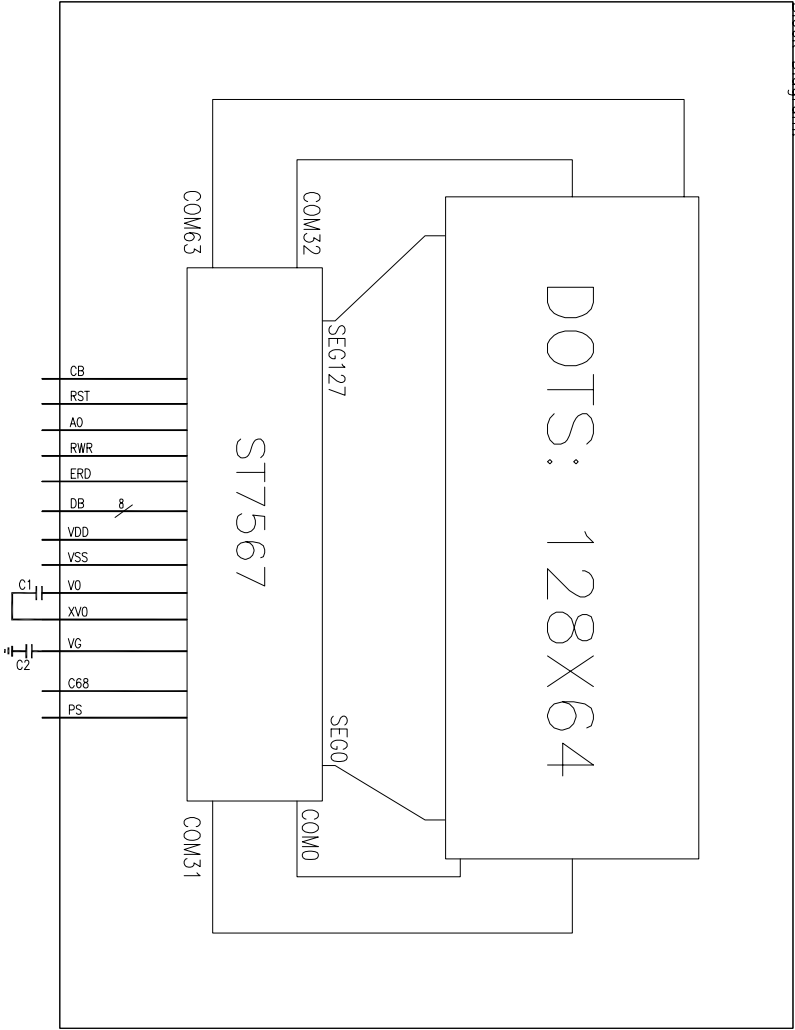

Pin Description:

PIN	Symbol	Function Description
1	CSB	Chip select input pin
2	RST	Reset input pin
3	AO	Register select pin
4	RWR	Read/Write execution control pin
5	ERD	Read/Write execution control pin
6	DB0	8-bit parallel interface
7	DB1	8-bit parallel interface
8	DB2	8-bit parallel interface
9	DB3	8-bit parallel interface
10	DB4	8-bit parallel interface
11	DB5	8-bit parallel interface
12	DB6	8-bit parallel interface
13	DB7	8-bit parallel interface
14	VDD	Power supply
15	VSS	Ground
16	VO	Connect 1uF cap to the XVO PIN
17	XVO	Connect 1uF cap to the VO PIN
18	VG	LCD driving voltage for segment circuits
19	C68	Parallel interface mode(6800=1;8080=0)
20	PS	PSB selects the interface type

DISPLAY TYPE: **STN/GRAY, Transflective, Positive**
VIEWING DIRECTION: 6:00
DRIVER IC: ST7567
LOGIC VOLTAGE: 3.2+0.1V
LCD DRIVE VOLTAGE(V_{lcd}): 9V
DRIVING METHODOD: 1/65 DUTY, 1/9 BIAS
OPERATING TEMPRATURE: -20°C ~ +70°C
STORAGE TEMPERATURE: -30°C ~ +80°C
INTERFACE CONNECTOR: FPC
All UNMARKED TOLERANCE: ±0.3mm



DRAWN:

CHECKED:

APPROVED:

A00: Original Edition
Revision History:
LCM NO: JAZZ-AC-G
DWG NO: JAZZ-AC-G

Rev: 00

UNITS: mm

SHEET 2 OF 2

CUSTOMER
APPROVAL:

