

Surface Mount Directional Coupler

50Ω 50 to 750 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2,5
ISOLATE (DO NOT USE)	4

Outline Drawing

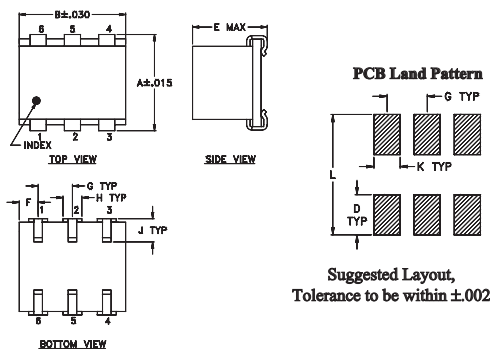


Outline Dimensions (inch mm)

A	B	C	D	E	F	G
.280	.310	--	.100	.225	.055	.100
7.11	7.87	--	2.54	5.72	1.40	2.54

H	J	K	L	wt
.047	.065	.065	.300	grams
1.19	1.65	1.65	7.62	0.45

Demo Board MCL P/N: TB-185 Suggested PCB Layout (PL-046)

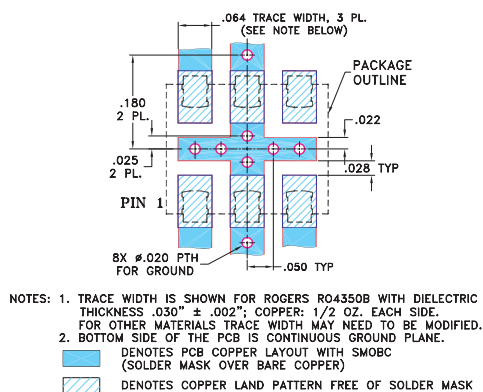

Features

- wideband, 50 to 750 MHz
- low mainline loss, 0.5 dB typ.
- excellent solderability

Applications

- communications
- level detecting
- signal sampling
- reflective power measurements

JDC-20-1W+
JDC-20-1W



CASE STYLE: BH292

PRICE: \$ 13.60 ea. QTY (25-49)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.




Directional Coupler Electrical Specifications

FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT, W
	Nom.	Flatness	Typ.	Max.	Typ.	Min.		
f _L -f _U							Typ.	Max.
50-750	19.5±0.5	±0.5	0.5	0.9	22	15	1.2	0.5


1. Mainline loss includes theoretical power loss at coupled port.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
50.00	0.33	19.77	21.32	30.32	32.06	25.34
150.00	0.33	19.87	21.83	34.90	38.90	29.25
250.00	0.35	19.87	22.89	36.40	41.45	30.37
330.00	0.35	19.87	24.06	36.11	40.25	30.40
385.00	0.40	19.87	25.12	35.07	38.62	29.96
435.00	0.42	19.82	26.45	33.87	37.00	29.35
480.00	0.46	19.83	27.52	32.62	35.61	28.65
525.00	0.44	19.76	28.59	31.36	34.22	27.88
650.00	0.50	19.68	28.53	27.83	30.53	25.66
750.00	0.55	19.59	25.15	25.26	27.85	24.06

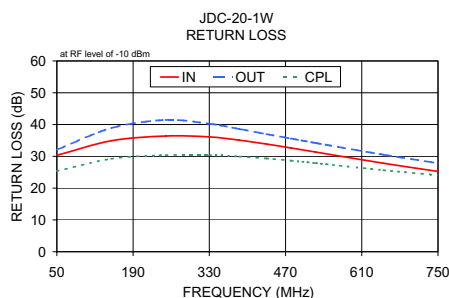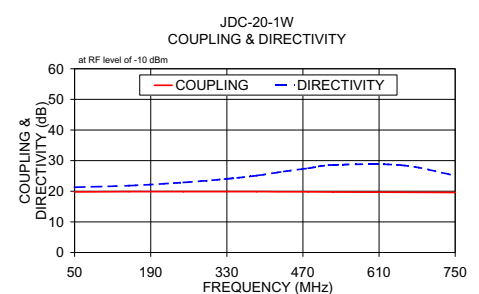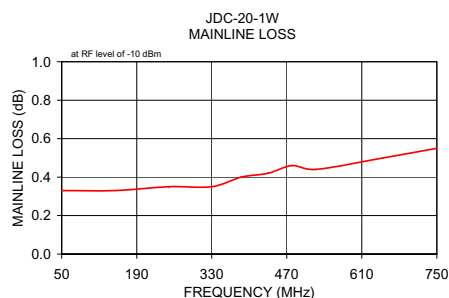

Electrical Schematic

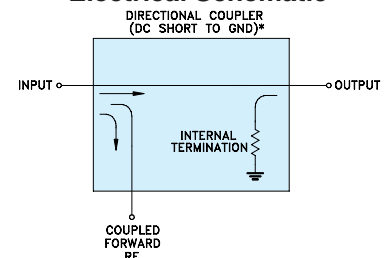

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

minicircuits.com

REV. D
M119986
ED-4386/3
JDC-20-1W
WZ/TD/CP/AM
081111