

Surface Mount Directional Coupler

75Ω 2 to 250 MHz

JDC-20-3-75+
JDC-20-3-75




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C

Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2,5
ISOLATE (DO NOT USE)	4

Outline Drawing

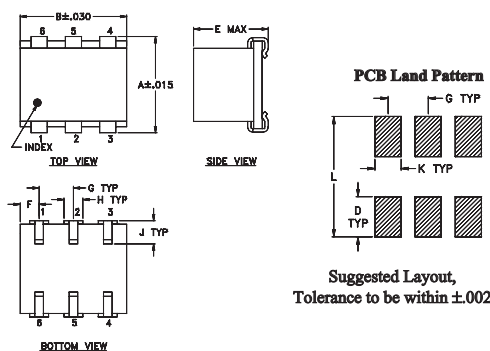


Outline Dimensions (inch mm)

A	B	C	D	E	F	G
.280	.310	--	.100	.225	.055	.100
7.11	7.87	--	2.54	5.72	1.40	2.54

H	J	K	L	wt
.047	.065	.065	.300	grams
1.19	1.65	1.65	7.62	0.45

Demo Board MCL P/N: TB-33 Suggested PCB Layout (PL-044)

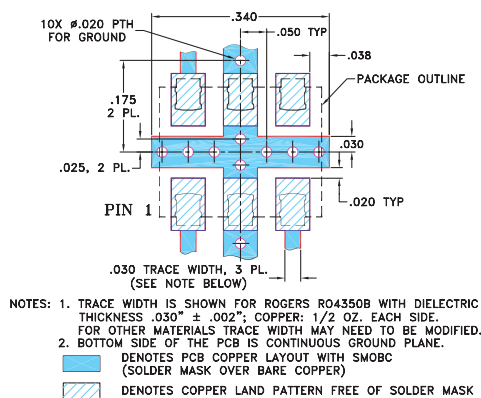

Features

- low mainline loss, 0.3 dB typ.
- high directivity, 30 dB typ.
- excellent solderability

Applications

- communications
- level detecting
- signal sampling
- reflective power measurements

CASE STYLE: BH292

PRICE: \$ 13.60 ea. QTY (25-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Directional Coupler Electrical Specifications

FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT, W	
			L		M		U		L		M		U				
	f _L -f _U	Nom.	Flatness	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.
2-250	19.2±0.5	±0.5	0.4	0.8	0.3	0.7	0.4	0.7	24	16	30	20	20	15	1.1	0.5	1.0




L = 2-20 MHz M = 20-125 MHz U = 125-250 MHz

1. Mainline loss includes theoretical power loss at coupled port.


Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl

1.00	0.44	19.22	23.26	23.55	24.40	23.02
4.00	0.30	19.23	29.11	28.64	31.07	28.66
7.00	0.28	19.24	30.46	29.97	33.28	30.26
10.00	0.28	19.24	31.30	30.50	34.28	30.94
50.00	0.30	19.26	30.27	31.34	33.32	32.19
90.00	0.32	19.28	27.59	31.42	30.68	33.55
130.00	0.35	19.32	25.09	30.66	28.22	35.94
150.00	0.37	19.35	23.75	29.92	26.97	37.80
180.00	0.40	19.38	22.06	28.50	25.21	41.60
250.00	0.46	19.45	18.52	25.22	21.84	37.78

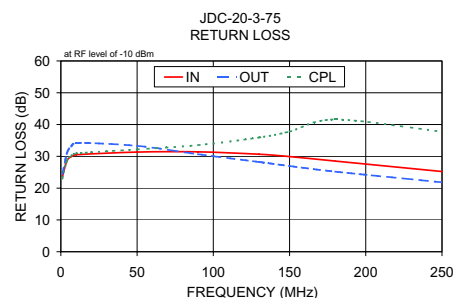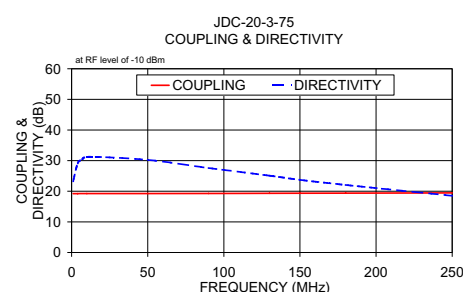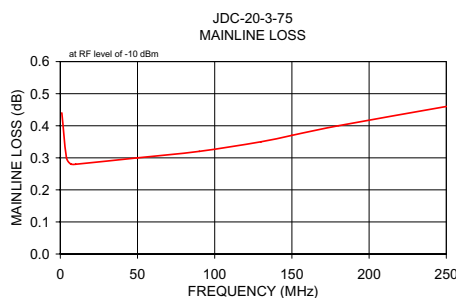

Electrical Schematic

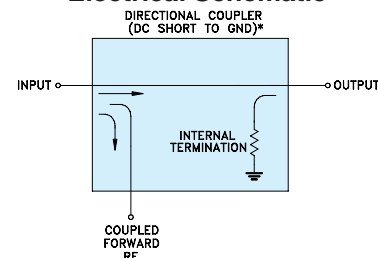

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

IF/RF MICROWAVE COMPONENTS

REV. C
M119986
ED-5581
JDC-20-3-75
WZ/TD/CP/AM
081111