




SHEET 1 OF 1

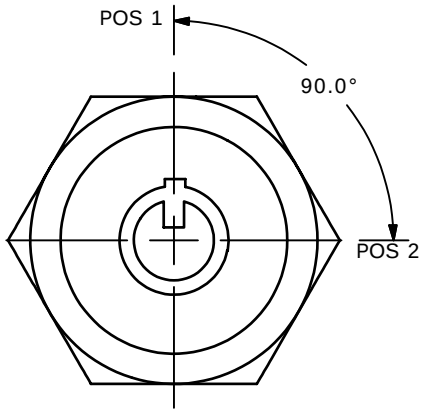

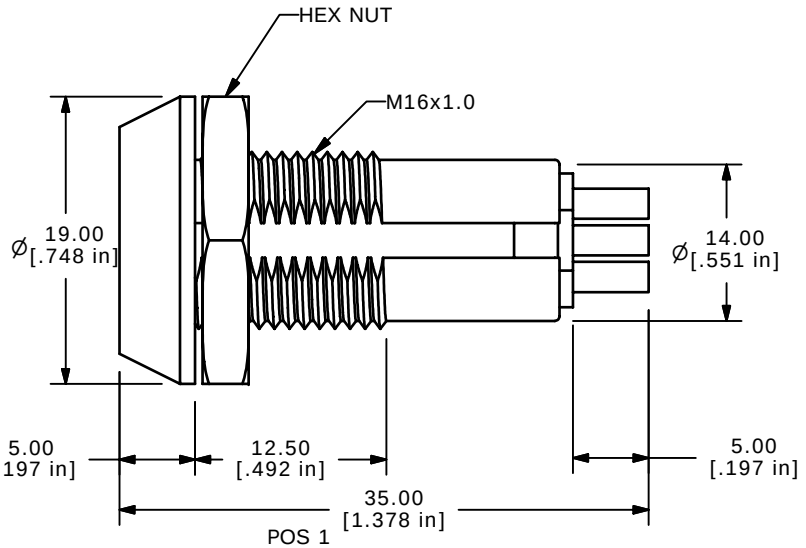




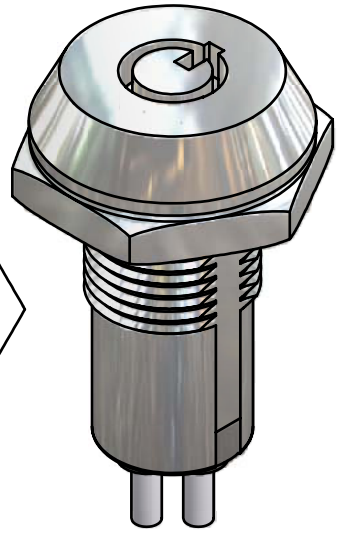




RECOMMENDED PANEL CUTOUT



CIRCUT: SPDT
CONTACT CONFIGURATION

90˚ INDEXING

SWITCH FUNCTION	
POS 1	POS 2
↑	→
ON	ON
TERM 1-2	TERM 3-4

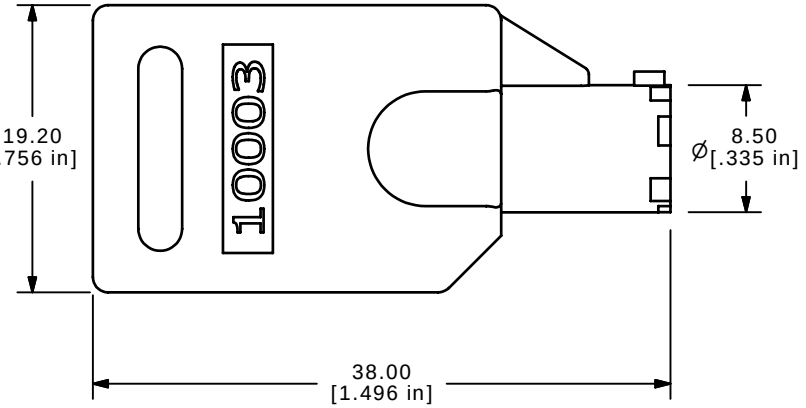

NOTES:
1. ALL DIMENSIONS IN MM[INCH]
2. GENERAL TOLERANCE: x.x= ±0.4
   x.xx= ±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 3A @125VAC, 1.5A @250VAC
5. CONTACT RESISTANCE: 20milli-OHMS MAX
6. DIELECTRIC STRENGTH: 1500 Vrms
7. INSULATION RESISTANCE: 200 MEGA-OHMS MIN.
8. MATERIALS:
   HOUSING: ZINC ALLOY DIE CAST W/ CHROME PLATING
   CYLINDER: ZINC ALLOY DIE CAST W/CHROME PLATING
   TERMINAL AND CONTACTS: SILVER PLATED
   KEYS (2) KEY CODE 10003: TUBULAR ZINC ALLOY, CHROME PLATING W/PLASTIC COVER

LEGEND

= INDICATES KEY PULL POSSIBLE

= INDICATES DETENT POSITION

REV	PCR NO	DESCRIPTION	DATE	BY
B	16496	FIXED SWITCH FUNCTION TO ON-ON	9/28/2006	TN
A	16477	NEW PART RELEASE	9/26/2006	TN

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE K0104A10003

SCALE	DATE	DR	DWG	REV
2:1	9/26/2006	TN	K300112	B