


Adjustable Type Coils K Type Series

Coils, Filters

K5-S

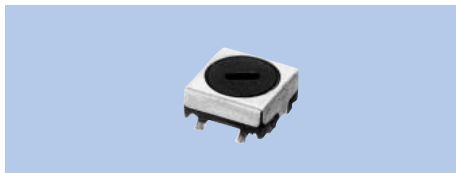


Specifications

- (1) 1~300 μ H (4) –
(2) 0.1~20MHz (5) 40~70
(3) F: $\pm$ 2%
L: $\pm$ 4%

Features

- SMD
1000pcs./Reel

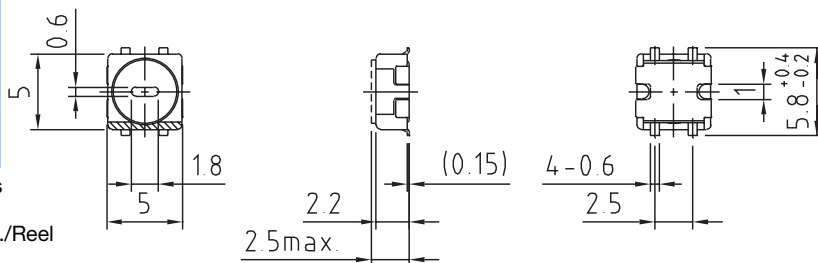

K5-S2




Specifications

- (1) 1~300 μ H
(2) 0.1~20MHz
(3) F: $\pm$ 2%
L: $\pm$ 4%
(4) –
(5) 40~70

Features

- SMD
1000pcs./Reel

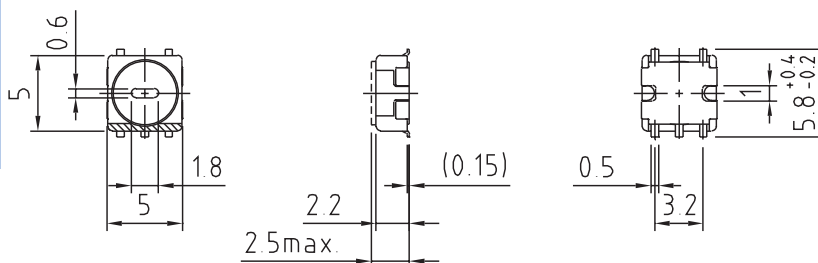

K5-N1




Specifications

- (1) 1~1200 μ H
(2) 0.1~20MHz
(3) F: $\pm$ 2%
L: $\pm$ 5%
(4) 5~15000pF $\times$ 2
(5) 50~80

Features

- SMD
1000pcs./Reel

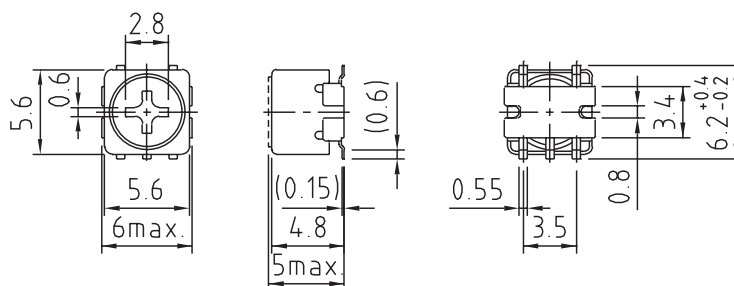

K5-N




Specifications

- (1) 1~5900 μ H
(2) 0.1~20MHz
(3) F: $\pm$ 2%
L: $\pm$ 5%
(4) 5~15000pF $\times$ 2
(5) 50~100

Features

- SMD
1000pcs./Reel

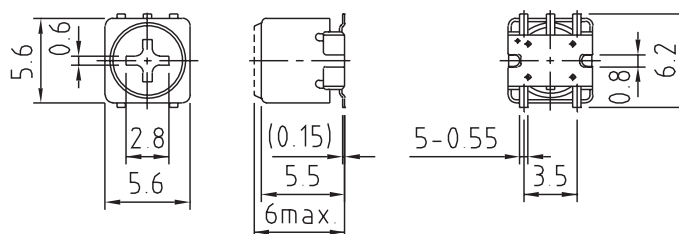

- (1) Inductance
(2) Operational frequency
(3) Variable range of F & L
(4) Internal capacitance
(5) Unloaded Q

K5-R2




Specifications

- | | |
|--------------------|--------------------------|
| (1) 1~6700 μ H | (4) 5~15000pF $\times$ 2 |
| (2) 10~500kHz | (5) 50~80 |
| (3) F: $\pm$ 2% | |
| L: $\pm$ 4% | |

Features

SMD
500psc./Reel

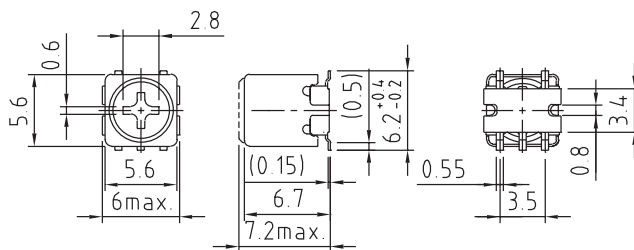


K5-R3



Specifications

- | | |
|-----------------|-----------|
| (1) 1~4mH | (4) — |
| (2) 40~100kHz | (5) 40~60 |
| (3) F: $\pm$ 2% | |
| L: $\pm$ 5% | |

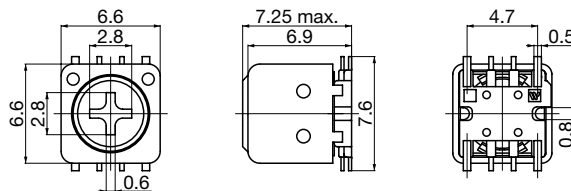


K5-H



Specifications

- | | |
|--------------------|----------------|
| (1) 1~1000 μ H | (4) 10~10000pF |
| (2) 0.1~20MHz | (5) 50~100 |
| (3) F: $\pm$ 2% | |
| L: $\pm$ 5% | |

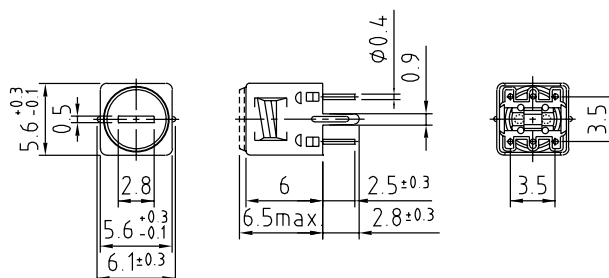


K5-C




Specifications

- | | |
|--------------------|----------------|
| (1) 1~1000 μ H | (4) 10~10000pF |
| (2) 0.1~20MHz | (5) 50~100 |
| (3) F: $\pm$ 2% | |
| L: $\pm$ 5% | |

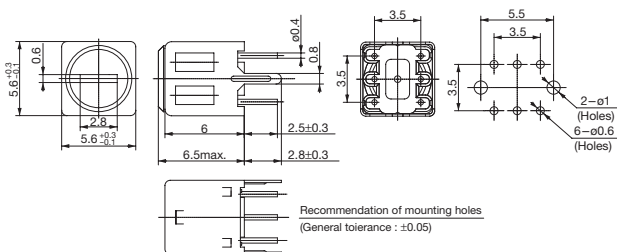


K7-P

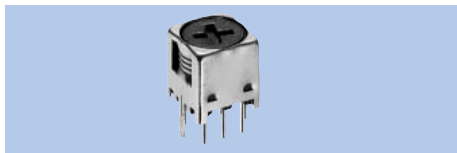

Specifications

- | | |
|---------------|----------------|
| (1) 1~1600μH | (4) 10~18000pF |
| (2) 0.1~20MHz | (5) 50~110 |
| (3) F:±2% | |
| L:±5% | |

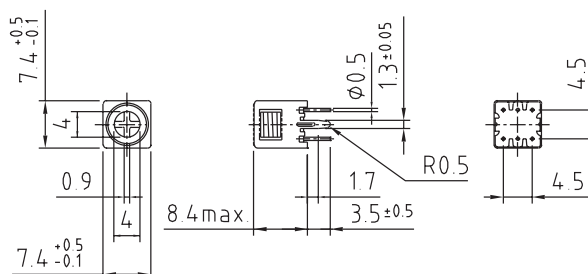


K7-D



Specifications

- | |
|---------------|
| (1) 5~100mH |
| (2) 10~300kHz |
| (3) F:±2% |
| L:±5% |
| (4) — |
| (5) 50~80 |

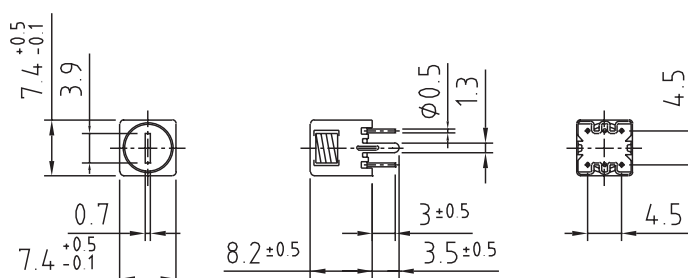


K7-T




Specifications

- | |
|---------------|
| (1) 1~850μH |
| (2) 0.1~20MHz |
| (3) F:±2% |
| L:±5% |
| (4) 10~430pF |
| (5) 60~110 |

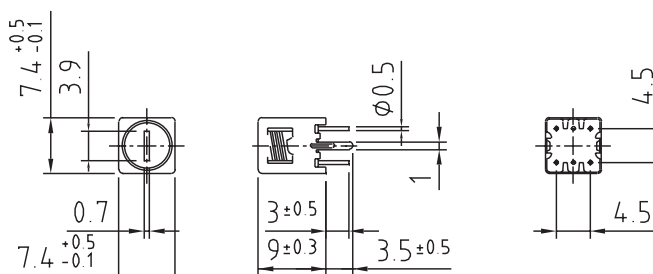


K7-T1

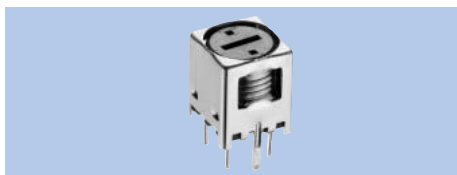


Specifications

- | |
|---------------|
| (1) 0.1~6mH |
| (2) 10~300kHz |
| (3) F:±2% |
| L:±5% |
| (4) — |
| (5) 40~70 |

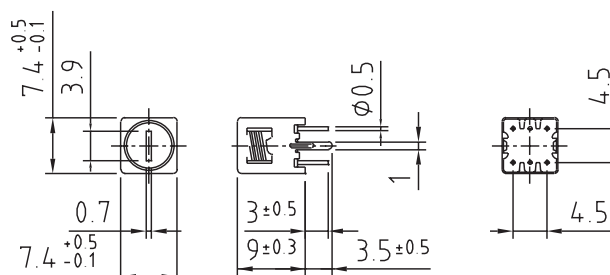


- (1) Inductance
 (2) Operational frequency
 (3) Variable range of F & L
 (4) Internal capacitance
 (5) Unloaded Q

K7-T3

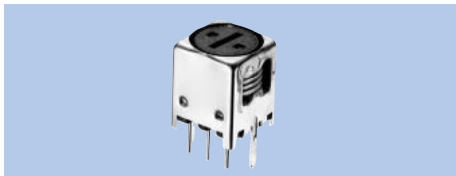

Specifications

- (1) 1~40mH
- (2) 0.1~1MHz
- (3) F:±2%
L:±5%
- (4) —
- (5) 50~140

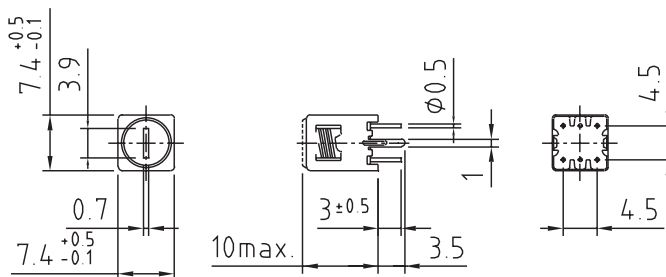


K7-H5(K7-H6)



Specifications

- (1) 1~1000μH
- (2) 0.1~20MHz
- (3) F:±3%
L:±6%
- (4) 10~18000pF
- (5) 50~140

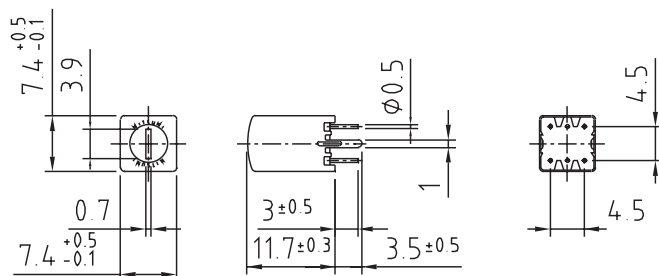


K7-J




Specifications

- (1) 1~40mH
- (2) 10~300kHz
- (3) L:±6%
- (4) —
- (5) 40~70

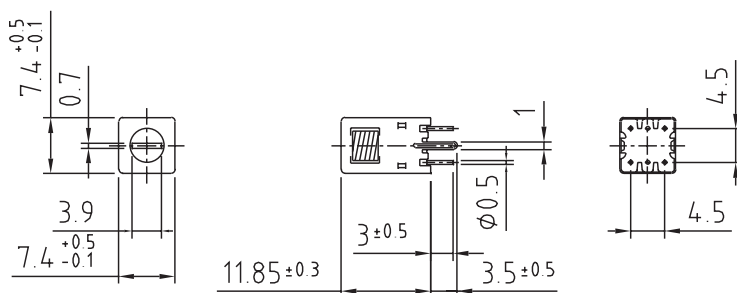


K7-J5

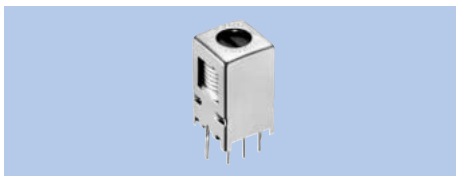

Specifications

- (1) 1~40mH
- (2) 10~300kHz
- (3) F:±3%
L:±6%
- (4) 10~18000pF
- (5) 40~70

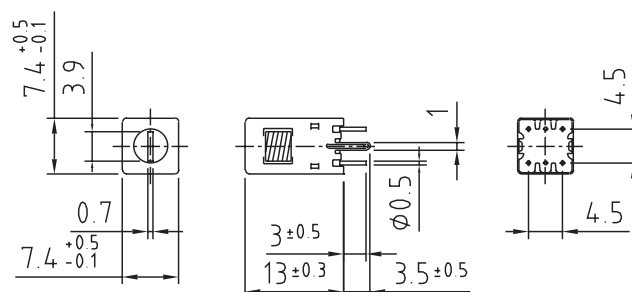

- (1) Inductance
- (2) Operational frequency
- (3) Variable range of F & L
- (4) Internal capacitance
- (5) Unloaded Q