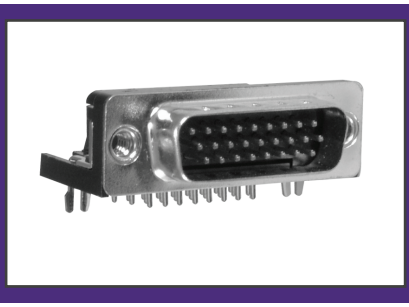


2D Drawing	IGES	STEP	3D PDF
Solder Profile	CofC RoHS Compliant	CofC REACH Compliant	UL Plastic File
Certificate of Origin	Check Stock	Request a Sample	Send Us An Email

Generated Part Number

K66XHT-E15P-N

Part Number Builder

K66XHT	–	E15	P	N
Series		Shell Size Contact	Contact Type	Mounting Option


D-SUBMINIATURE CONNECTORS:

K66XHT Series

High Temperature Right Angle PCB Mount

K66XHT Series Dimensions

Dimensions in mm

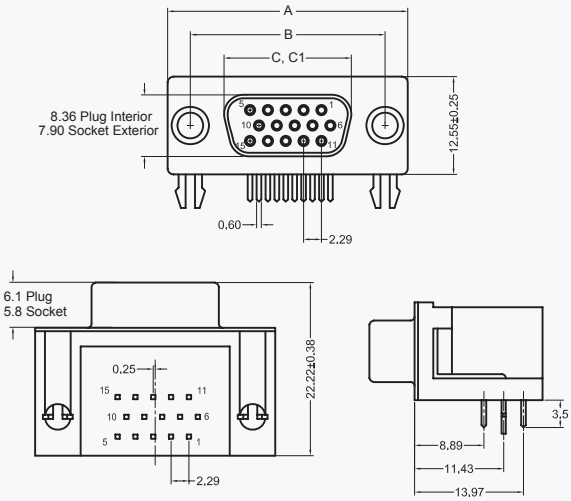

Shell Size / In / mm	A ±.015 ±0.38	B ±.005 ±0.13	C ±.010 ±.0.25	C1 ±.010 ±0.25	D ±.005 ±0.13	E ±.005 ±0.13
15	1.213	.984	.643	.666	.090	.010
(E)	30.81	24.99	16.33	16.92	2.29	0.25
26	1.541	1.312	.971	.994	.090	.020
(A)	39.14	33.32	24.66	25.25	2.29	0.51
44	2.088	1.852	1.511	1.534	.090	.020
(B)	53.04	47.04	38.38	38.96	2.29	0.51
62	2.729	2.500	2.159	2.182	.095	.023
(C)	69.32	63.50	54.84	55.42	2.41	0.58

C = Exterior of Female Shell (S)
C1 = Interior of Male Shell (P)

Series
K66XHT - Reflow Compatible Version

Shell Size-Contact Option
E - 15 Contacts
A - 26 Contacts
B - 44 Contacts

Contact Type
P - Pin Contact (Plug)
S - Socket Contact (Receptacle)

Mounting Option
N - With Boardlocks and #4-40 UNC Threaded Inserts
NJ - With Boardlocks and #4-40 Jackscrews Installed

Contact Kycon for VESA and Other Options