



DASH NO.	M CODE	MADE FROM
----------	--------	-----------

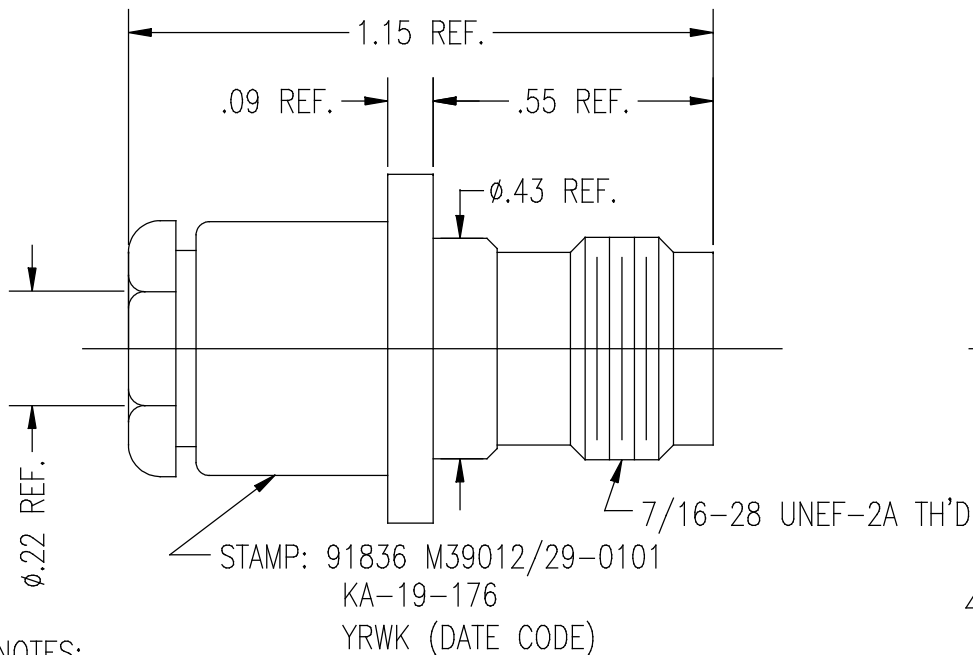

NOTES:

- FOR USE WITH RG-58, 141, 142, 223, & 400/U CABLE GROUPS.
- FOR CABLING INSTRUCTIONS SEE CP-1050
- MATERIALS:
INSULATORS: TEFLON, ASTM-B-4894
GASKET: SILICONE RUBBER PER SPEC. ZZ-R-765
CENTER CONTACT: BER. COP., ASTM-B-196
ALL OTHER METAL PARTS: BRASS
- FINISHES:
CENTER CONTACT: HARD GOLD PLATE, .0001 MIN., MIL-G-45204
ALL OTHER METAL PARTS: SILVER PLATE, .0002 MIN., QQ-S-365
- ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 500 VRMS
FREQUENCY RANGE: 0 TO 4 GHz

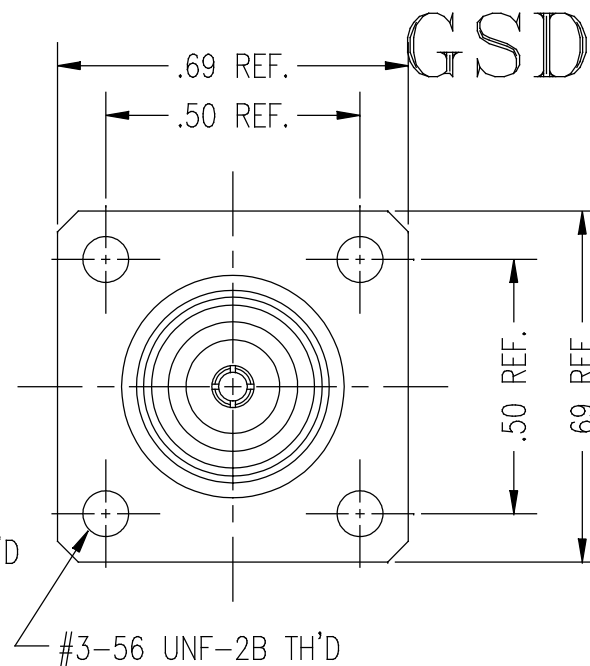

M39012/29-0101
(SHT 1 OF 2)

REVISIONS	
ISSUE	CHANGES
0	ER 18931 MJB 12/05/78
1	CN 19009 D LI 01/12/79
2	CN 23169 E JEP 04/30/82
3	CN 32302 A LNM 06/20/90
4	CN 38684 C BDH 10/09/02
5	CN 40008 C PMC 07/20/07
SCALE 4:1	
APPROX SURFACE AREA	
KA-19-176	
USED ON	
REF:	
TNC PANEL JACK	
DRAWN MJB	DATE 12/05/78
DESIGN	DATE
APPR. LI	DATE 12/07/78
 RICK HILL, SOUTH CAROLINA 29730	
M39012/29-0101 (SHT 1 OF 2)	

GSD