


GSD

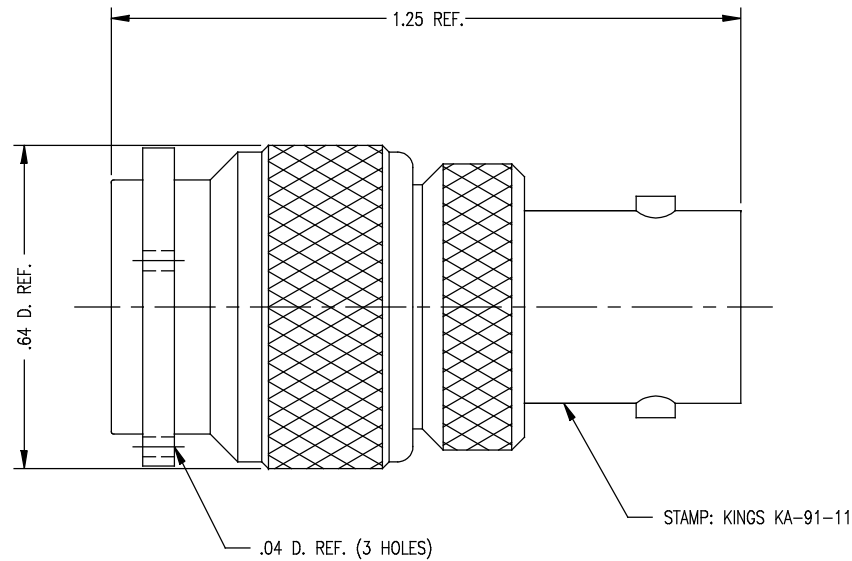

- NOTES:
1. INTERFACES PER MIL-STD-348, 313-1 & 301-2.
 2. MATERIALS:
 - INSULATOR: TEFLON, ASTM-D-4894
 - GASKET: SILICONE RUBBER, ZZ-R-765
 - OUTER CONTACT } BER. COP., ASTM-B-196
 - CENTER CONTACT }
 - ALL OTHER METAL PARTS: BRASS, ASTM-B16
 3. FINISHES:
 - ALL METAL PARTS: SILVER PLATE PER QQ-S-365
 4. ELECTRICAL CHARACTERISTICS:
 - NOMINAL IMPEDANCE: 50 OHMS
 - FREQUENCY RANGE: DC TO 4 GHZ
 - WORKING VOLTAGE: 500 VRMS

GSD

KA-91-11

REVISIONS

ISSUE	CHANGES
8	CN 35600 C REDRAWN KH 05/26/94

KAX1089

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

ADPT, M-F, TNC-BNC

DRAWN	KH	DATE	05/26/94
DESIGN	TK	DATE	05/27/94
APPR.	VLS	DATE	06/01/94

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

KA-91-11