



KBPC3005 THRU KBPC310


Reverse Voltage - 50 to 1000 Volts Forward Current - 3.0 Amperes

SILICON BRIDGE RECTIFIERS

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Ideal for printed circuit boards
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 260°C/10 seconds, 5 lbs. (2.3kg) tension

KBPC-6/BR-6

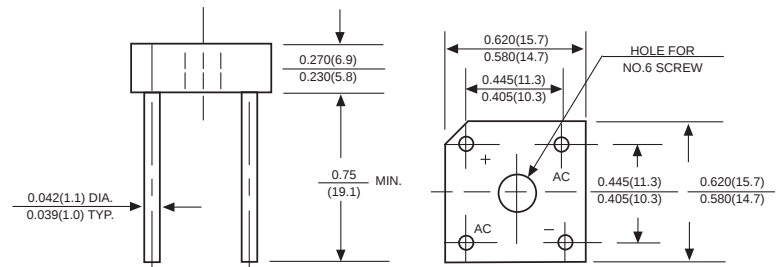

Mechanical Data


Case : JEDEC BR-6 Molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Polarity symbol marking on body

Mounting Position : Any

Weight : 0.13 ounce, 3.66 grams



Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	MDD KBPC3005	MDD KBPC301	MDD KBPC302	MDD KBPC304	MDD KBPC306	MDD KBPC308	MDD KBPC310	UNITS
Marking Code									
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	30	70	140	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum average forward output rectified current at $T_A=50^\circ\text{C}$ (Note 1) $T_A=25^\circ\text{C}$ (Note 2)	I_{AV}	3.0							A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	125							A
Rating for Fusing($t<8.3\text{ms}$)	I^2t	10							A^2s
Maximum instantaneous forward voltage drop per bridge element at 3.0A	V_F	1.1							V
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=100^\circ\text{C}$	I_R	10							μA
		1.0							mA
Typical Junction Capacitance (Note 4)	C_J	55							pF
Typical Thermal Resistance (Note 3)	$R_{\theta JA}$	9.4							$^\circ\text{C/W}$
Operating junction temperature range	T_J	-55 to +125							$^\circ\text{C}$
storage temperature range	T_{STG}	-55 to +150							$^\circ\text{C}$

NOTES:

1. Unit mounted on 6.0" x 5.5" x 0.11" thick (15x14x0.3cm) Al. plate.
2. Unit mounted on P.C. board with 0.47" x 0.47" (12x12mm) copper pads, 0.375" (9.5mm) lead length.
3. UNon-repetitive, for $t>1\text{ms}$ and $<8.3\text{ms}$.
4. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.



Ratings And Characteristic Curves

Fig. 1 Derating Curve for Output Rectified Current

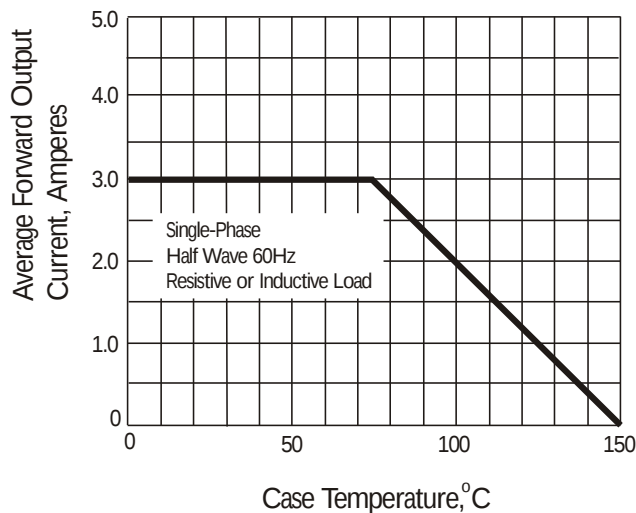


Fig. 2 Maximum Non-repetitive Peak Forward Surge Current

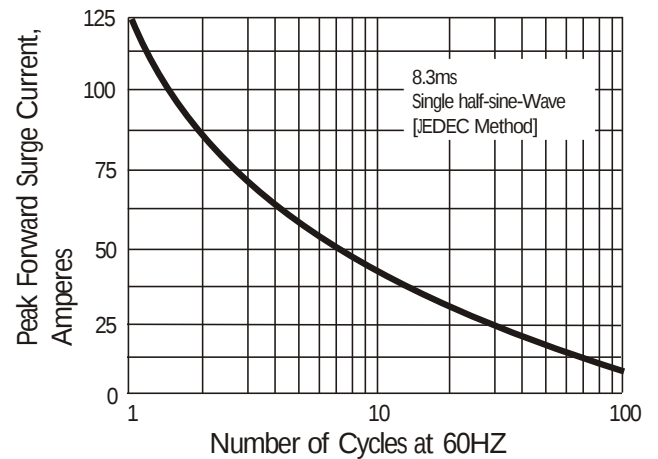


Fig. 3 Typical Instantaneous Forward Characteristics


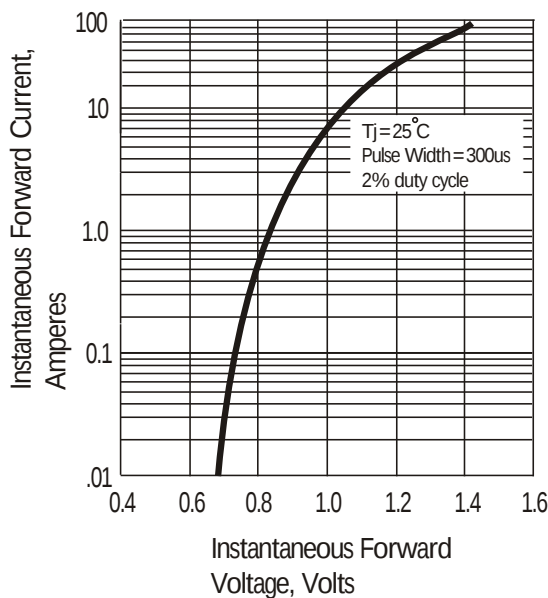


Fig. 4 Typical Reverse Characteristics

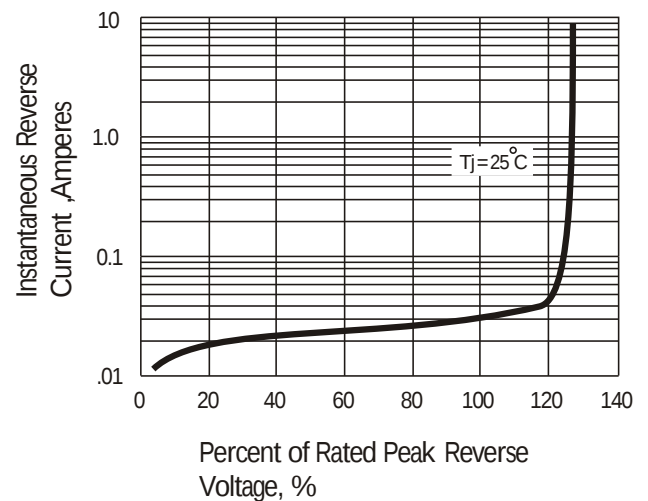

The curve above is for reference only.