DASH NO.	DESCRIPTION	MADE FROM

S-D

M39012/17-0502

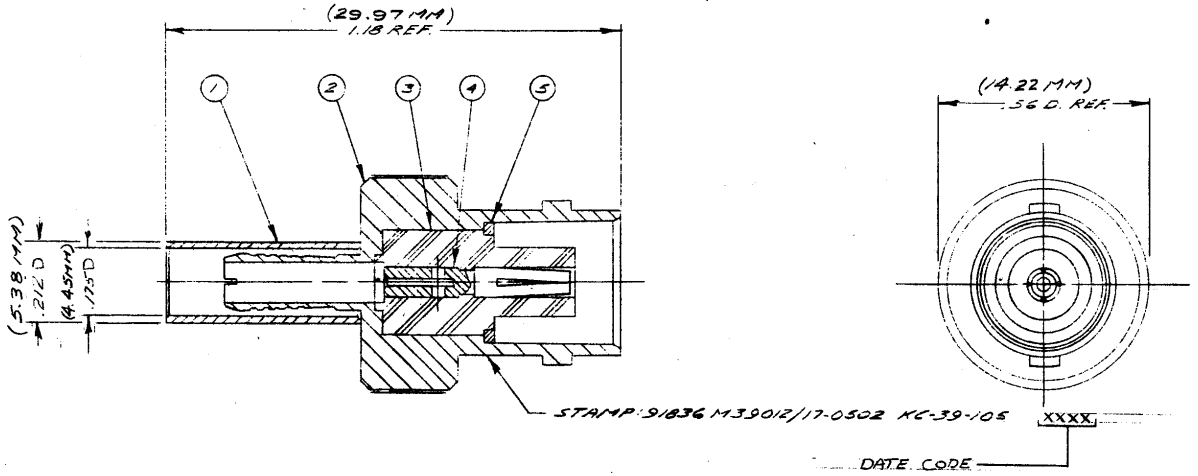

NOTES:
1. FOR USE WITH RG-180, 180A, 180B, 195 & 195 A/U CABLE.
2. FOR CABLE TRIMMING USE KTJ-116 & KTD-161.
3. FOR FORMING USE CRIMP DIE 07.
4. FOR CABLING INSTRUCTIONS SEE CP-965.

6. ITEM (4) TO BE SUPPLIED UNASSEMBLED.

S-D

ITEM	REQ'D	DESCRIPTION	PART NO.
6	1	CABLING INSTRUCTIONS	
5	1	RETAINER RING	
4	1	BNC CRIMP CAPTIVE CONTACT	1-570-22M30
3	1	INSULATOR	
2	1	K-GRIP BODY	
1	1	K-GRIP SLEEVE	1-4699-3NC7

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010
   3 PLACE DECIMALS ± .004 ANGLES ± 0° 30'
   T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.
2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
3. NO FILLETS PERMITTED.
4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
5. ALL DIMENSIONS PRIOR TO PLATING.

DIETZGEN 1998M 12116

REVISIONS

ISSUE	CHANGES
0	ER 14085 MJB 22JAN 75
1	CN 15973 A GA 15JUL 76
2	CN 23168 E MD 22 APR 82
3.	CN 25533 D CT 13DEC 83
4	CN 28200 A C4C 5AUG 86
5	CN 28237 C CHC 16AUG 86
6	CN 32673 A LNM 13JUN 90

S-D

KC-39-105

USED ON:

REF:

FINISH

SPEC.

MATL.

SPEC.

BNC JACK

DRAWN MJ3 DATE 3 JAN 75

APPR. LI DATE 22JAN75

KINGS ELECTRONICS
40 MARBLEDALE ROAD
TUCKAHOE, N. Y. 10707

M39012/17-0502