
DASH NO.	M CODE	MADE FROM

GSD

KC-59-70

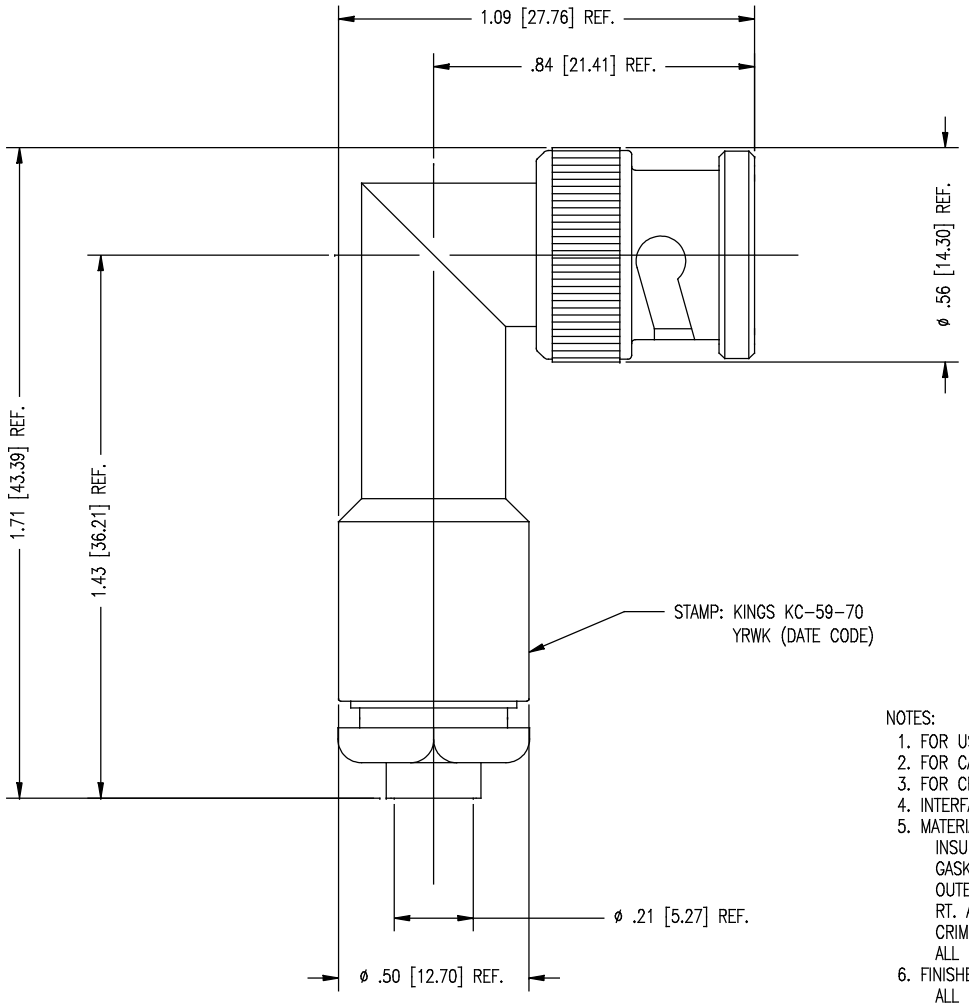

NOTES:
1. FOR USE WITH RG-58 & 141/U CABLE GROUPS.
2. FOR CABLING INSTRUCTIONS SEE CP-201A.
3. FOR CRIMPING USE KTH-2001 DIE SET.
4. INTERFACE PER MIL-STD-348, FIG 301-1.
5. MATERIALS:
   INSULATORS: TEFLON, ASTM-D4894
   GASKETS: SILICON RUBBER, A-A-59588
   OUTER CONTACT } BERYLLIUM COPPER, ASTM-B196
   RT. ANGLE CONTACT
   CRIMP SLEEVE: COMMERICAL BRONZE, ASTM-B135
   ALL OTHER METAL PARTS: BRASS, ASTM-B16
6. FINISHES:
   ALL METAL PARTS: SILVER PLATE, ASTM-B700
7. ELECTRICAL CHARACTERISTICS:
   NOMINAL INPEDANCE: 50 OHMS
   WORKING VOLTAGE: 500 VRMS
   FREQUENCY RANGE: DC TO 4 GHZ

GSD

REVISIONS	
ISSUE	CHANGES
3	CN 23586 C GL 03/25/83
4	CN 39608 C REDRAWN JPK 09/05/06

KC-59-70

SCALE	3 : 1
APPROX SURFACE AREA	N/A
USED ON	
REF:	

BNC, RIGHT ANGLE, PLUG

DRAWN	J. KENNEDY	DATE	09/06/06
DESIGN	J.G.L.	DATE	10/25/73
APPR.		DATE	

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

KC-59-70