

SMART Transmitter Power Supply KCD2-STC-Ex1.ES.SP

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Input for 2-wire SMART transmitters and current sources
- Output for 4 mA ... 20 mA or 1 V ... 5 V
- Sink or source mode
- Line fault detection (LFD)
- Housing width 12.5 mm
- Connection via spring terminals with push-in connection technology
- Up to SIL 3 acc. to IEC/EN 61508



Function

This isolated barrier is used for intrinsic safety applications.

The device supplies 2-wire transmitters in the hazardous area, and can also be used with current sources.

The device transfers the analog input signal to the non-hazardous area as an isolated current value.


Bi-directional communication is supported for SMART transmitters that use current modulation to transmit data and voltage modulation to receive data.

The output is selected as a current source, current sink, or voltage source via DIP switches.

A fault is signaled by LEDs and a separate collective error message output.

Test sockets for the connection of HART communicators are integrated into the terminals of the device.

Connection

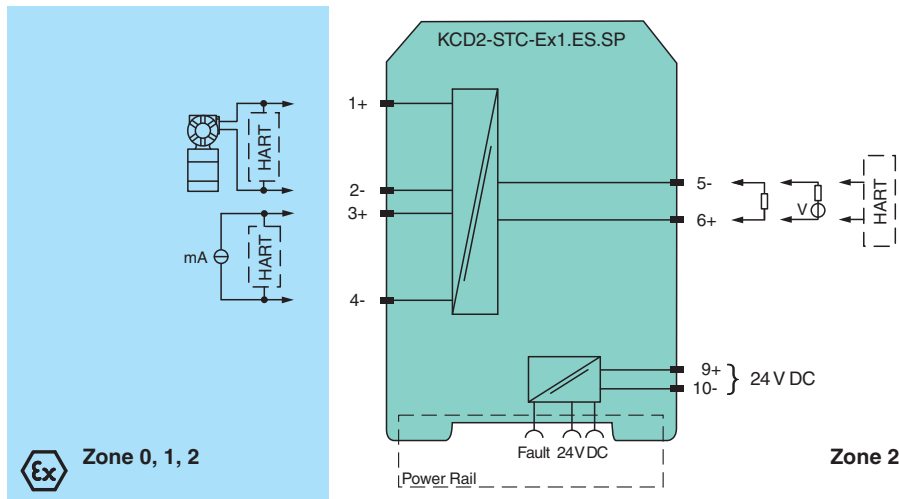

Technical Data

General specifications	
Signal type	Analog input
Functional safety related parameters	
Safety Integrity Level (SIL)	SIL 3
Systematic capability (SC)	SC 3
Supply	
Connection	Power Rail or terminals 9+, 10-
Rated voltage	U_r 19 ... 30 V DC
Ripple	$\leq 10 \%$

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Rated current	I_r	$\leq 50 \text{ mA}$
Power dissipation		$\leq 800 \text{ mW}$
Power consumption		$\leq 1.2 \text{ W}$
Input		
Connection side		field side
Connection		terminals 1+, 2-; 3+, 4-
Input signal		4 ... 20 mA, limited to approx. 27 mA reverse polarity protected
Line fault detection		downscaling $\leq 3 \text{ mA}$; upscaling $\geq 22 \text{ mA}$
Voltage drop		approx. 5 V on terminals 3+, 4-
Available voltage		$\geq 15 \text{ V}$ at 20 mA terminals 1+, 2-
Output		
Connection side		control side
Connection		terminals 5-, 6+
Load		0 ... 300 Ω (source mode)
Output signal		4 ... 20 mA or 1 ... 5 V (on 250 Ω , 0.1 % internal shunt) 4 ... 20 mA (sink mode), operating voltage 16 ... 28 V
Ripple		20 mV _{rms}
Fault indication output		
Output type		fault bus signal, open collector transistor
Transfer characteristics		
Deviation		at 20 °C (68 °F) $\leq \pm 20 \mu\text{A}$ incl. calibration, linearity, hysteresis, loads and supply voltage fluctuations (source mode and sink mode 4 ... 20 mA) $\leq 10 \text{ mV}$ incl. calibration, linearity, hysteresis and fluctuations of supply voltage (source mode 1 ... 5 V)
Influence of ambient temperature		$< 2 \mu\text{A/K}$ (0 ... 70 °C (32 ... 158 °F)); $< 4 \mu\text{A/K}$ (-20 ... 0 °C (-4 ... 32 °F)) (source mode and sink mode 4 ... 20 mA) $< 0.5 \text{ mV/K}$ (0 ... 70 °C (32 ... 158 °F)); $< 1 \text{ mV/K}$ (-20 ... 0 °C (-4 ... 32 °F)) (source mode 1 ... 5 V)
Frequency range		field side into the control side: bandwidth with 1 mA _{pp} signal 0 ... 3 kHz (-3 dB) control side into the field side: bandwidth with 0.5 V _{pp} signal 0 ... 3 kHz (-3 dB)
Settling time		$\leq 200 \text{ ms}$
Rise time/fall time		$\leq 20 \text{ ms}$
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Input/power supply		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Output/power supply		Basic isolation acc. to EN 61010-1 rated insulation voltage $\leq 50 \text{ V}$
Indicators/settings		
Display elements		LEDs
Control elements		DIP switch
Configuration		via DIP switches
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		NE 21:2017 For further information see system description.
Degree of protection		IEC 60529:2001
Ambient conditions		
Ambient temperature		-20 ... 70 °C (-4 ... 158 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		spring terminals
Mass		approx. 100 g
Dimensions		12.5 x 119 x 114 mm (0.5 x 4.7 x 4.5 inch) (W x H x D), housing type A2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001

Release date: 2021-12-16 Date of issue: 2021-12-16 Filename: 322428_eng.pdf


Technical Data

Data for application in connection with hazardous areas

EU-type examination certificate		CESI 10 ATEX 071
Marking		Ⓜ II (1)G [Ex ia Ga] IIC Ⓜ II (1)D [Ex ia Da] IIIC Ⓜ I (M1) [Ex ia Ma] I
Input		Ex ia
Supply		
Maximum safe voltage	U_m	253 V AC (Attention! U_m is no rated voltage.)
Equipment		terminals 1+, 2-
Voltage U_o		25.2 V
Current I_o		100 mA
Power P_o		630 mW
Internal capacitance C_i		5.7 nF
Internal inductance L_i		negligible
Equipment		terminals 3+, 4-
Voltage U_i		< 30 V
Current I_i		< 128 mA
Voltage U_o		7.2 V
Current I_o		100 mA
Power P_o		25 mW
Internal capacitance C_i		5.7 nF
Internal inductance L_i		negligible
Certificate		CESI 19 ATEX 005 X
Marking		Ⓜ II 3G Ex ec IIC T4 Gc
Directive conformity		
Directive 2014/34/EU		EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-7:2015
International approvals		
UL approval		E106378
Control drawing		116-0378 (cULus)
IECEx approval		
IECEx certificate		IECEx CES 11.0001X
IECEx marking		[Ex ia Ga] IIC , [Ex ia Da] IIIC , [Ex ia Ma] I Ex ec IIC T4 Gc
General information		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Assembly

Front view

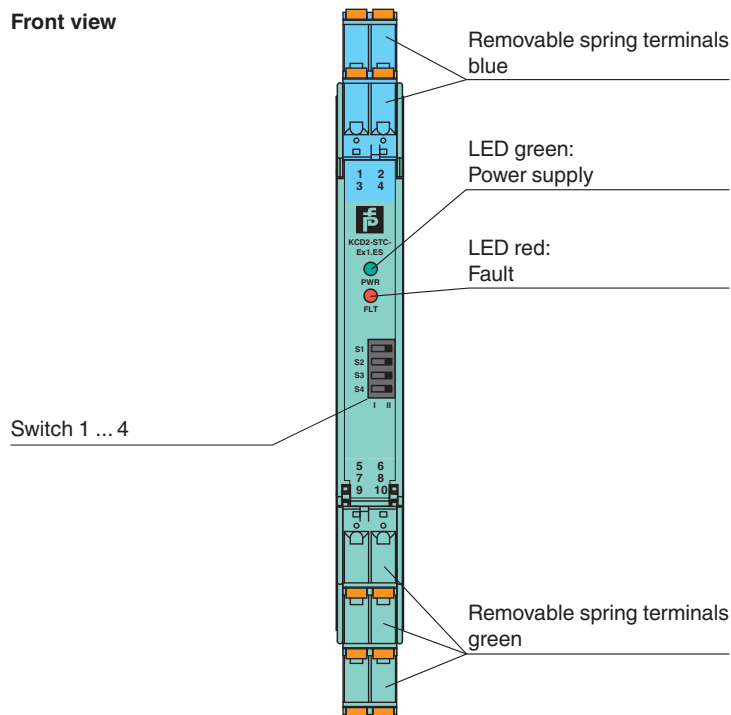

Matching System Components

	KFD2-EB2	Power Feed Module
	UPR-03	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	UPR-03-M	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	UPR-03-S	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	K-DUCT-BU	Profile rail, wiring comb field side, blue
	K-DUCT-BU-UPR-03	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side, blue

Accessories


	KC-CTT-3GN2BU	Terminal block for KC modules, 2-pin spring terminal, with test sockets
	KC-CTT-5BU	Terminal block for KC modules, 2-pin spring terminal, with test sockets, blue
	KC-CTT-5GN	Terminal block for KC modules, 2-pin spring terminal, with test sockets, green
	KF-CP	Red coding pins, packaging unit: 20 x 6

Application

The device supports the following SMART protocols:

- HART

Configuration

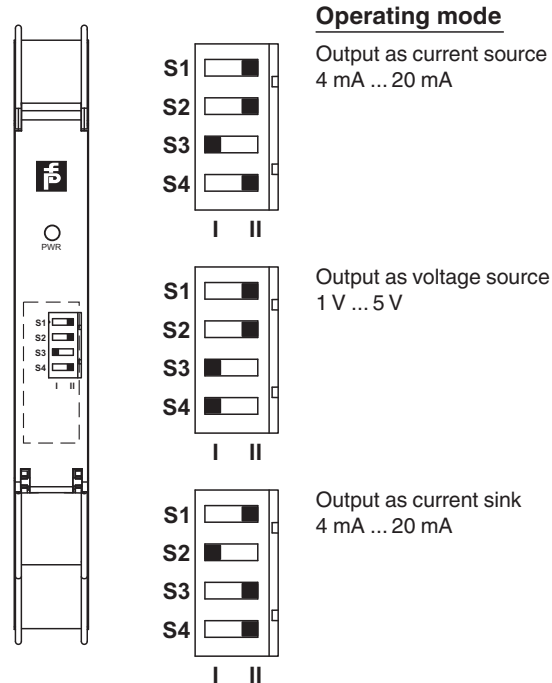

Factory settings: output as current source 4 mA ... 20 mA

Characteristic Curve

Transfer characteristic

