


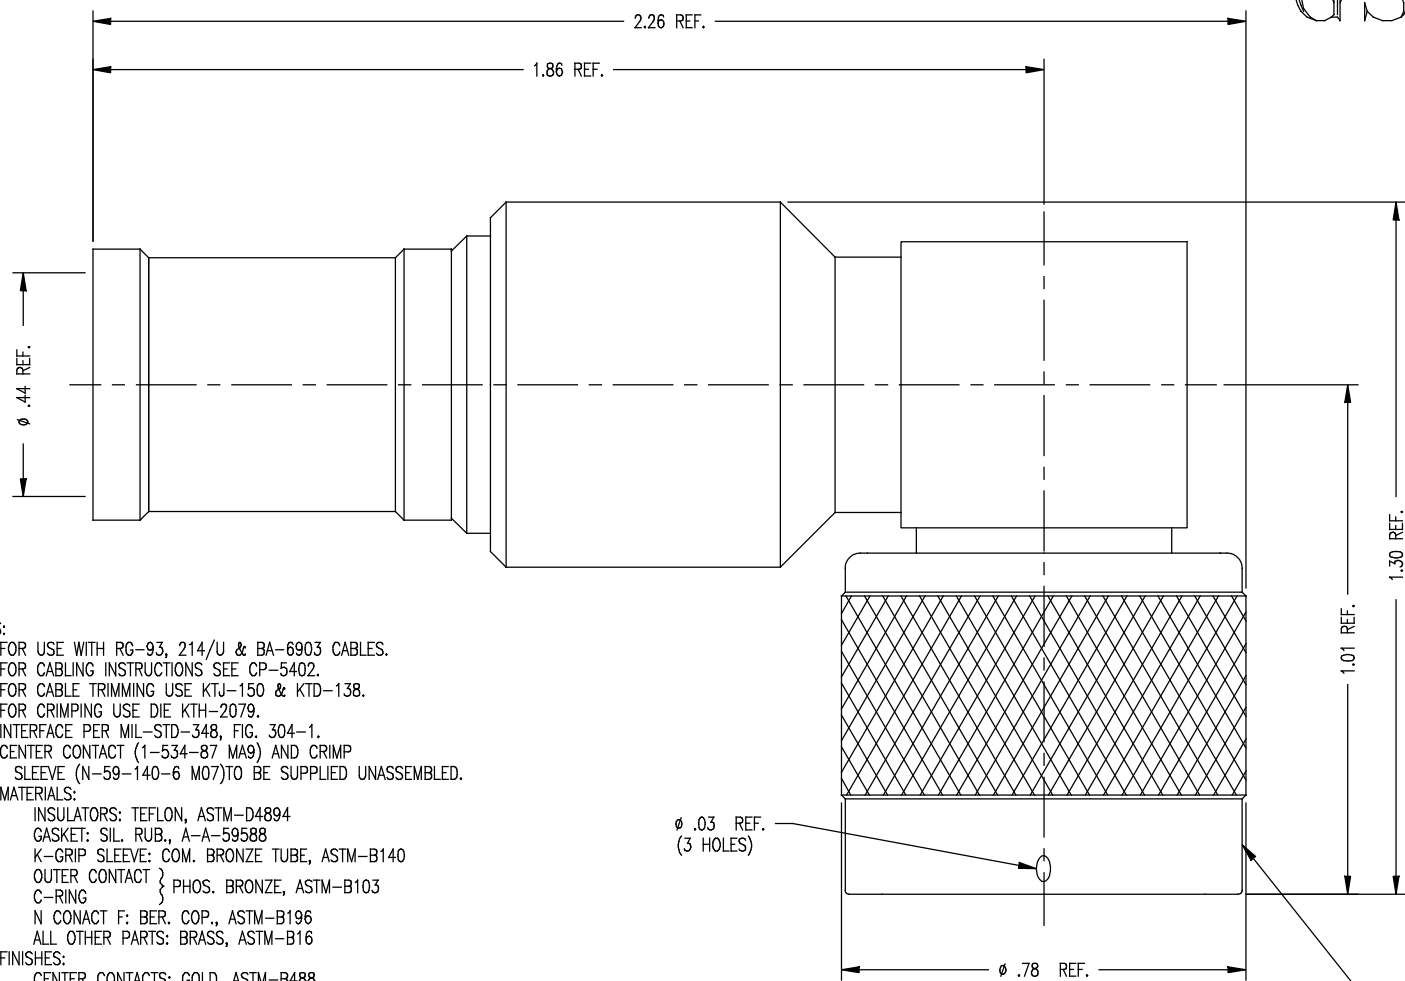

- NOTES:
1. FOR USE WITH RG-93, 214/U & BA-6903 CABLES.
 2. FOR CABLING INSTRUCTIONS SEE CP-5402.
 3. FOR CABLE TRIMMING USE KTJ-150 & KTD-138.
 4. FOR CRIMPING USE DIE KTH-2079.
 5. INTERFACE PER MIL-STD-348, FIG. 304-1.
 6. CENTER CONTACT (1-534-87 MA9) AND CRIMP SLEEVE (N-59-140-6 M07) TO BE SUPPLIED UNASSEMBLED.
 7. MATERIALS:
 INSULATORS: TEFLON, ASTM-D4894
 GASKET: SIL. RUB., A-A-59588
 K-GRIP SLEEVE: COM. BRONZE TUBE, ASTM-B140
 OUTER CONTACT } PHOS. BRONZE, ASTM-B103
 C-RING
 N CONTACT F: BER. COP., ASTM-B196
 ALL OTHER PARTS: BRASS, ASTM-B16
 8. FINISHES:
 CENTER CONTACTS: GOLD, ASTM-B488
 ALL OTHER METAL PARTS: SILVER, ASTM-B700
 9. ELECTRICAL CHARACTERISTICS:
 NOMINAL IMPEDANCE: 50 OHMS
 VOLTAGE RATING: 1000 VRMS
 FREQUENCY RANGE: DC TO 11 GHz

STAMP: KINGS KN-59-263-M07

GSD

GSD

KN-59-263-M07

REVISIONS

ISSUE	CHANGES
1	CN 33219 C JCA 08/16/91
2	CN 39511 C DRK 06/30/06

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

PLUG, ANGLE, N

DRAWN	JCA	DATE	12/21/92
DESIGN	MJB	DATE	12/22/92
APPR.		DATE	

KINGS

ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

KN-59-263-M07