


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

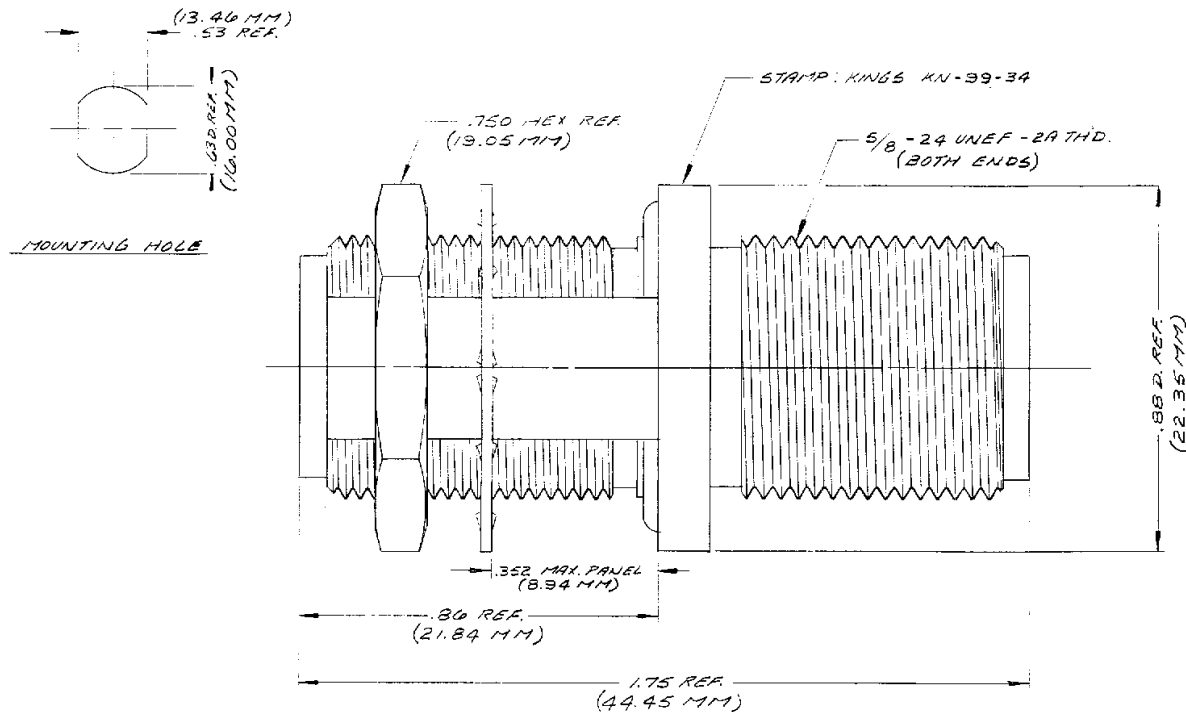

NOTES:

1. MATERIAL:

CENTER CONTACT — BER. COPPER, QQ-C-530.
 INSULATORS — TEFLON, L-P-403.
 LOCKWASHER — PHOSPHOR BRONZE, QQ-B-750.
 O-RING — NITRILE RUBBER, PER MIL-P-5315.
 ALL OTHER METAL PARTS — BRASS, QQ-B-626.

2. FINISHES:

ALL METAL PARTS — SILVER PLT, PER.
 QQ-S-365.

3. ELECTRICAL CHARACTERISTICS:

NOMINAL IMPEDANCE — 50 Ω.
 FREQUENCY RANGE — DC TO 110 MHz.
 WORKING VOLTAGE — 1000 VOLTS RMS.

UNLESS OTHERWISE SPECIFIED:

1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010
 3 PLACE DECIMALS ± .004 ANGLES ± 0°30'
 T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY
 NOT EXCEED HALF THE SUM OF THEIR TOLERANCES.

2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
 3. NO FILLETS PERMITTED.
 4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX.
 5. ALL DIMENSIONS PRIOR TO PLATING.
 6. ALL PLATING IN ACCORDANCE WITH KER 10004.

KN-99-34

REVISIONS	
ISSUE	CHANGES
2.	CN 26189 C CT 4 JUN 84
GSD	
SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF	
N BULKHEAD ADAPTER F-F	
DRAWN CT	DATE 28 MAR 85
APPR. KLB	DATE 7 APR 85
APPR. —	DATE —
KINGS ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10701	
KN-99-34	

GSD