

SANYO

Cadnica

Cell Type KR-1300SC
Specifications






Dimensions of Bare Cell	H	42.0 $^{\pm0.3}$	mm
		1.654 $^{\pm0.012}$	inch
	D	22.0 $^{\pm0.3}$	mm
		0.866 $^{\pm0.012}$	inch
	d	10.0	mm
		0.394	inch


Nominal Capacity			1300mAh
Nominal Voltage			1.2V
Charging Current		Standard	130mA
		Quick	260mA
Charging Time		Standard	14 to 16Hrs.
		Quick	7 to 8Hrs.
Ambient Temperature	Charge	Standard	0°C to +45°C [+32°F to 113°F]
		Quick	0°C to +45°C [+32°F to 113°F]
	Discharge		-20°C to +60°C [-4°F to 140°F]
	Storage		-30°C to +50°C [-22°F to 122°F]
Internal Impedance (Av.) (at. 50% discharge)			6.0mΩ (at 1000Hz)
Weight			45g/1.59oz
Dimensions(D)×(H) (with tube)			22.9 $^{0}_{-1}$ × 43.0 $^{0}_{-1.2}$ mm 0.90 $^{0}_{-0.04}$ × 1.69 $^{0}_{-0.05}$ inch

Typical Characteristics


Charge

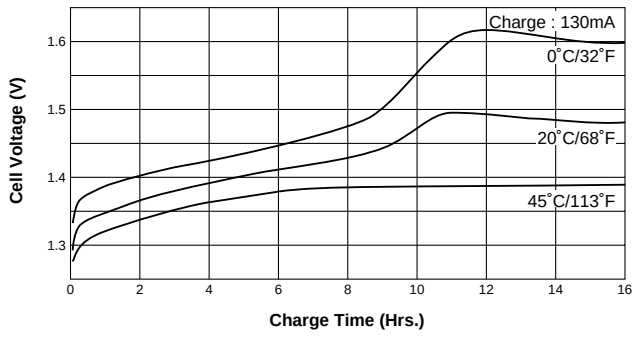


Discharge (at high rate)

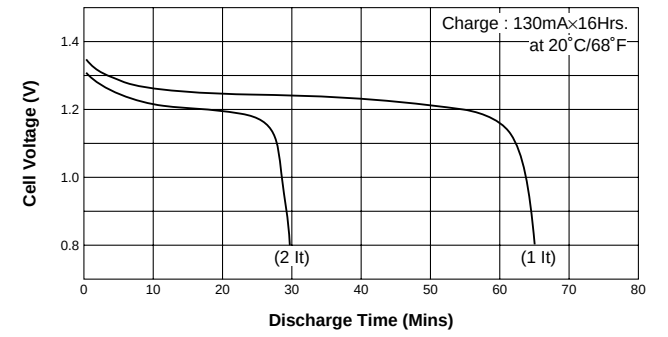


Charge

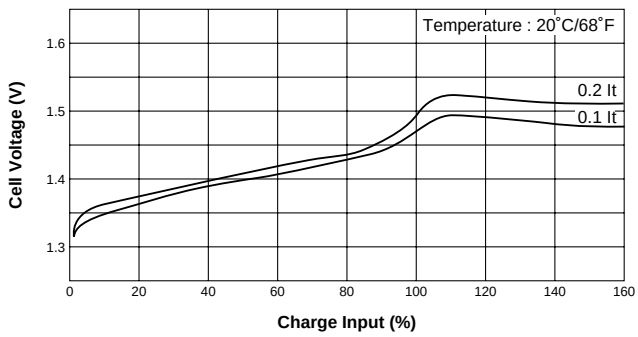


Discharge (at high rate)

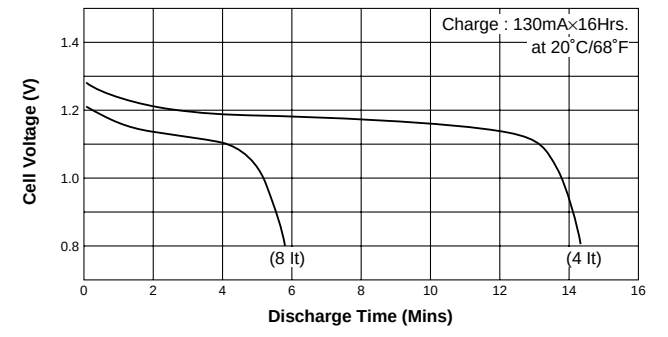

Discharge (at low rate)

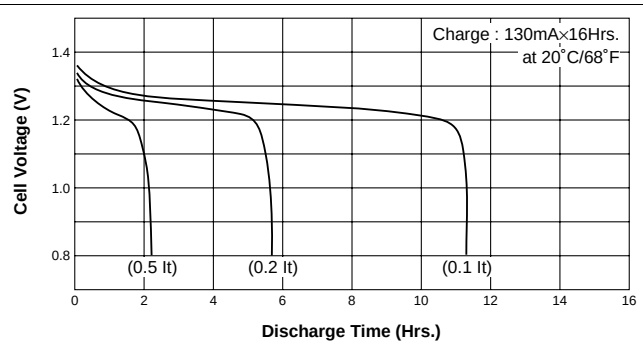

Temperature (Charge & Discharge)

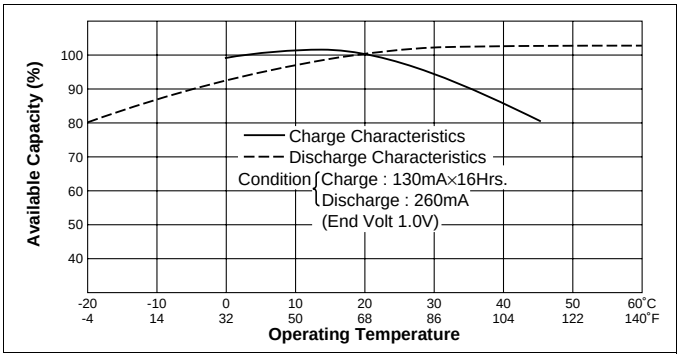

CD010830