
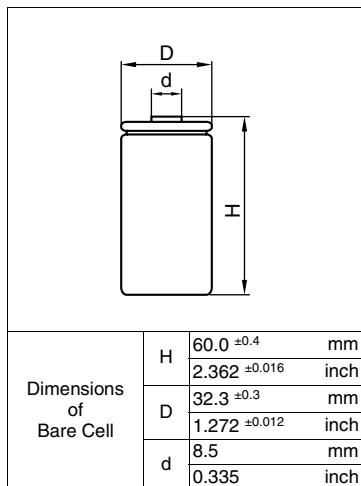


# SANYO

## Cadnica

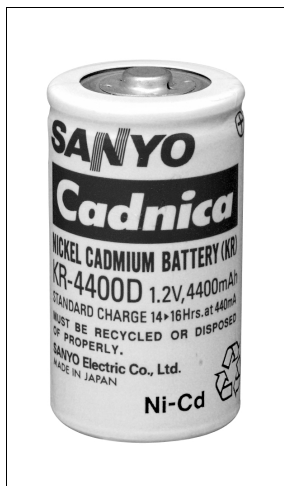


## Cell Type KR-4400D

### Specifications


|                                             |           |                                                                                                                                                          |
|---------------------------------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Nominal Capacity                            |           | 4400mAh                                                                                                                                                  |
| Nominal Voltage                             |           | 1.2V                                                                                                                                                     |
| Charging Current                            |           | 440mA                                                                                                                                                    |
| Charging Time                               |           | 14 to 16Hrs.                                                                                                                                             |
| Ambient Temperature                         | Charge    | 0°C to +45°C [+32°F to 113°F]                                                                                                                            |
|                                             | Discharge | -20°C to +60°C [-4°F to 140°F]                                                                                                                           |
|                                             | Storage   | -30°C to +50°C [-22°F to 122°F]                                                                                                                          |
| Internal Impedance (Av.) (at 50% discharge) |           | 3.8mΩ (at 1000Hz)                                                                                                                                        |
| Weight                                      |           | 145g/5.11oz                                                                                                                                              |
| Dimensions(D)×(H) (with tube)               |           | 33.0 <sup>0</sup> <sub>-0.9</sub> × 61.1 <sup>0</sup> <sub>-1.5</sub> mm<br>1.30 <sup>0</sup> <sub>-0.04</sub> × 2.41 <sup>0</sup> <sub>-0.06</sub> inch |

### Typical Characteristics


#### Charge

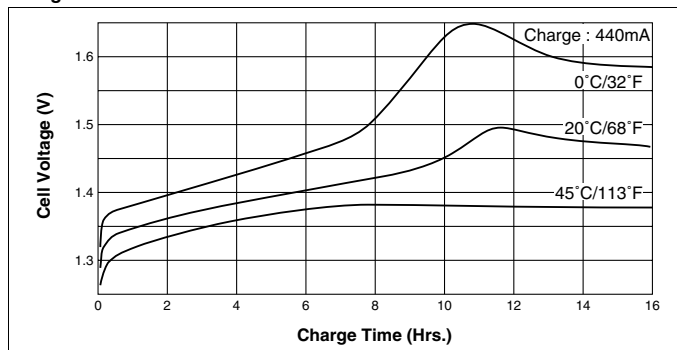


#### Discharge (at high rate)

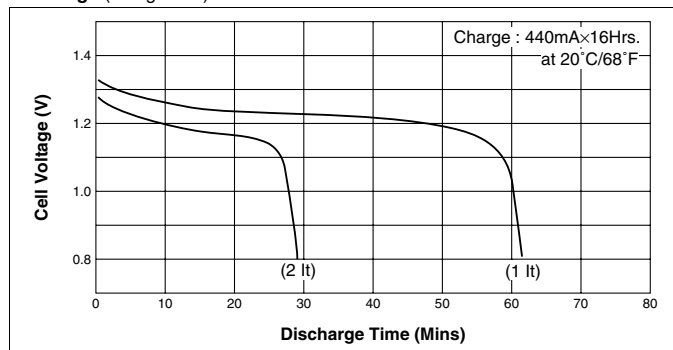


#### Cell Capacity (at various discharge rate)

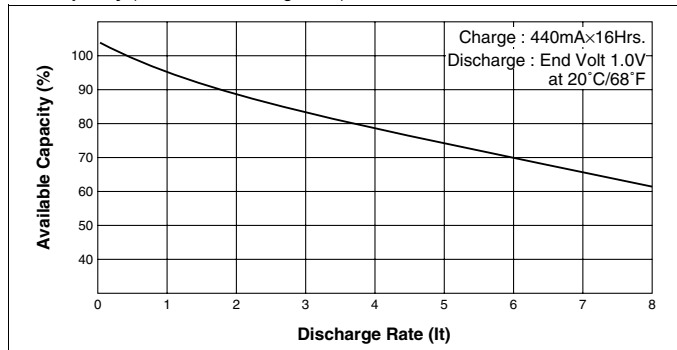

#### Discharge (at high rate)

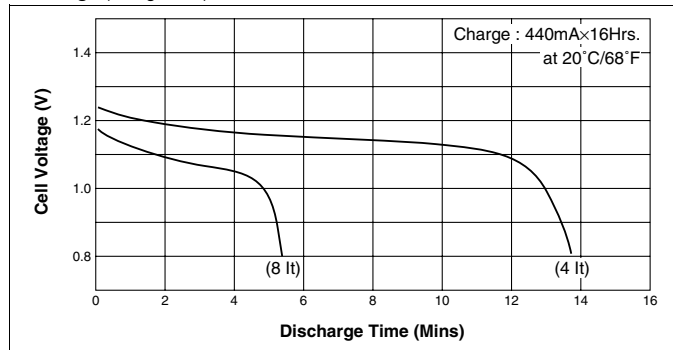

#### Discharge (at low rate)

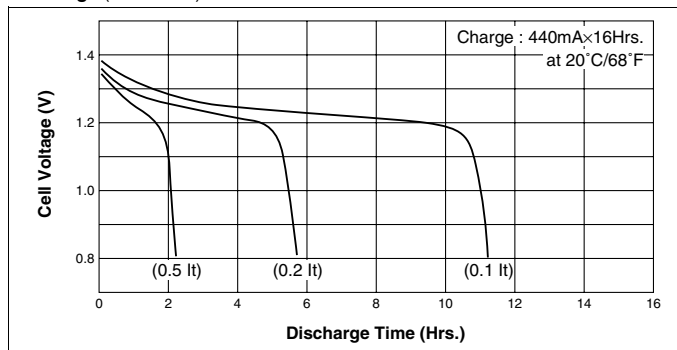

#### Temperature (Charge & Discharge)

