Plug-in Signal Conditioners K-UNIT

POTENTIOMETER TRANSMITTER


(CE, two isolated outputs)

Functions & Features

• Providing two DC outputs proportional to a potentiometer or slidewire position input
• Constant voltage excitation allows the connection of pots with total resistance from 100 Ω – 10 kΩ without affecting accuracy
• 50 % zero/span adjustments with minimal interaction
• Fast response type available
• High-density mounting

Typical Applications

• Tank levels
• Positions



CE

MODEL: KWMS2–[1][2]–[3][4]

ORDERING INFORMATION

• Code number: KWMS2-[1][2]-[3][4]
Specify a code from below for each of [1] through [4].
(e.g. KWMS2-A6-H/K/Q)
• Special output ranges (For codes Z & 0)
• Specify the specification for option code /Q
(e.g. /C01/S01)
Note: When the user requires a current and a voltage output, specify the current to be the Output 1 which allows a greater load.

INPUT POTENTIOMETER

Total resistance 100 Ω – 10 kΩ

[1] OUTPUT 1

Current

A: 4 – 20 mA DC (Load resistance 600 Ω max.)
B: 2 – 10 mA DC (Load resistance 1200 Ω max.)
C: 1 – 5 mA DC (Load resistance 2400 Ω max.)
D: 0 – 20 mA DC (Load resistance 600 Ω max.)
E: 0 – 16 mA DC (Load resistance 750 Ω max.)
F: 0 – 10 mA DC (Load resistance 1200 Ω max.)
G: 0 – 1 mA DC (Load resistance 12 kΩ max.)
Z: Specify current (See OUTPUT SPECIFICATIONS)

Voltage

1: 0 – 10 mV DC (Load resistance 10 kΩ min.)
2: 0 – 100 mV DC (Load resistance 100 kΩ min.)
3: 0 – 1 V DC (Load resistance 1000 Ω min.)
4: 0 – 10 V DC (Load resistance 10 kΩ min.)
5: 0 – 5 V DC (Load resistance 5000 Ω min.)
6: 1 – 5 V DC (Load resistance 5000 Ω min.)
4W: -10 – +10 V DC (Load resistance 10 kΩ min.)
5W: -5 – +5 V DC (Load resistance 5000 Ω min.)
0: Specify voltage (See OUTPUT SPECIFICATIONS)

[2] OUTPUT 2

Current

A: 4 – 20 mA DC (Load resistance 350 Ω max.)
B: 2 – 10 mA DC (Load resistance 700 Ω max.)
C: 1 – 5 mA DC (Load resistance 1400 Ω max.)
D: 0 – 20 mA DC (Load resistance 350 Ω max.)
E: 0 – 16 mA DC(Load resistance 430 Ω max.)
F: 0 – 10 mA DC (Load resistance 700 Ω max.)
G: 0 – 1 mA DC (Load resistance 7000 Ω max.)
Z: Specify current (See OUTPUT SPECIFICATIONS)

Voltage

Same range availability as Output 1

[3] POWER INPUT

AC Power

G: 200 V AC
H: 220 V AC
J: 240 V AC

DC Power

S: 12 V DC
R: 24 V DC

[4] OPTIONS (multiple selections)

Response Time (0 – 90 %)

blank: Standard (≤ 0.5 sec.)
/K: Fast Response (Approx. 25 msec.)

Other Options

blank: none
/Q: Option other than the above (specify the specification)

SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to M-System's web site.)

/C01: Silicone coating
/C02: Polyurethane coating
/C03: Rubber coating

TERMINAL SCREW MATERIAL
/S01: Stainless steel

GENERAL SPECIFICATIONS

Construction: Plug-in
Connection: M3.5 screw terminals
Screw terminal: Chromated steel (standard) or stainless steel
Housing material: Flame-resistant resin (black)
Isolation: Input to output 1 to output 2 to power
Zero adjustment: 0 – 50 % of total resistance (front)
Span adjustment: 50 – 100 % of total resistance (front)

INPUT SPECIFICATIONS

Minimum span: 50 % of total resistance
Excitation: 0.5 V DC

OUTPUT SPECIFICATIONS

■ **DC Current**: 0 – 20 mA DC
Minimum span: 1 mA
Offset: Max. 1.5 times span
Load resistance: Output drive 12 V max. for Output 1; 7 V max. for Output 2
■ **DC Voltage**: -10 – +12 V DC
Minimum span: 5 mV
Offset: Max. 1.5 times span
Load resistance: Output drive 1 mA max. at ≥ 0.5 V

INSTALLATION

Power input
•**AC**: Operational voltage range: rating ±10 %, 50/60 ±2 Hz, approx. 3 VA
•**DC**: Operational voltage range: rating ±10 % ripple 10 %p-p max., approx. 3 W (125 mA at 24 V)
Operating temperature: -5 to +55°C (23 to 131°F)
Operating humidity: 30 to 90 %RH (non-condensing)
Mounting: Surface or DIN rail
Weight: 400 g (0.88 lb)


PERFORMANCE in percentage of span

Accuracy: ±0.1 %
Temp. coefficient: ±0.02 %/°C (±0.01 %/°F)
Line voltage effect: ±0.1 % over voltage range
Insulation resistance: ≥ 100 MΩ with 500 V DC
Dielectric strength: 2300 V AC @ 1 minute (input or output to power to ground)
1350 V AC @ 1 minute (input to output)
1000 V AC @ 1 minute (output 1 to output 2)

STANDARDS & APPROVALS


EU conformity:
EMC Directive
EMI EN 61000-6-4
EMS EN 61000-6-2
Low Voltage Directive
EN 61010-1
Installation Category II
Pollution Degree 2
Input or output to power: Reinforced insulation (300 V)
Input to output: Basic insulation (300 V)
RoHS Directive

EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm [inch]

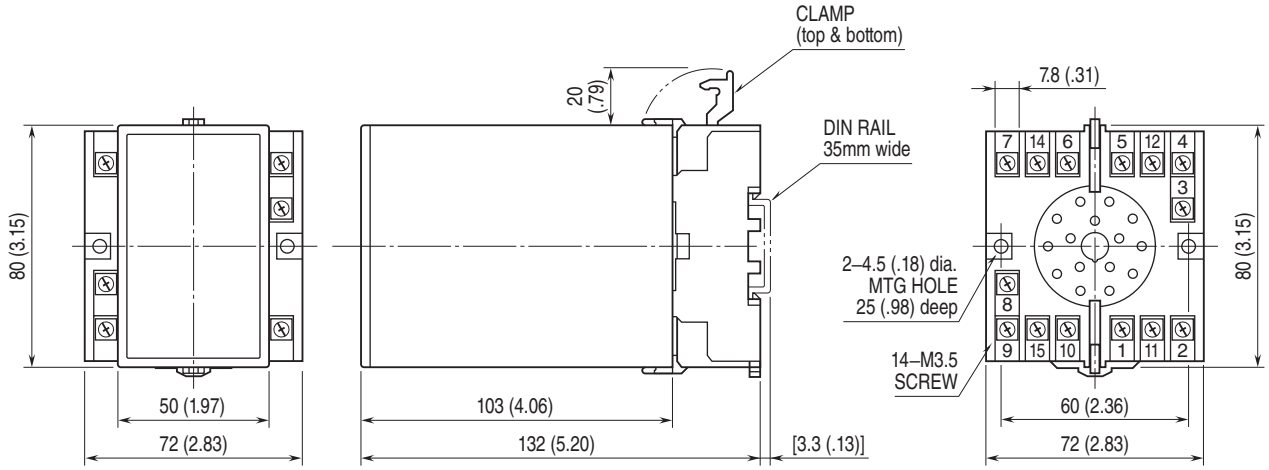

• When mounting, no extra space is needed between units.

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

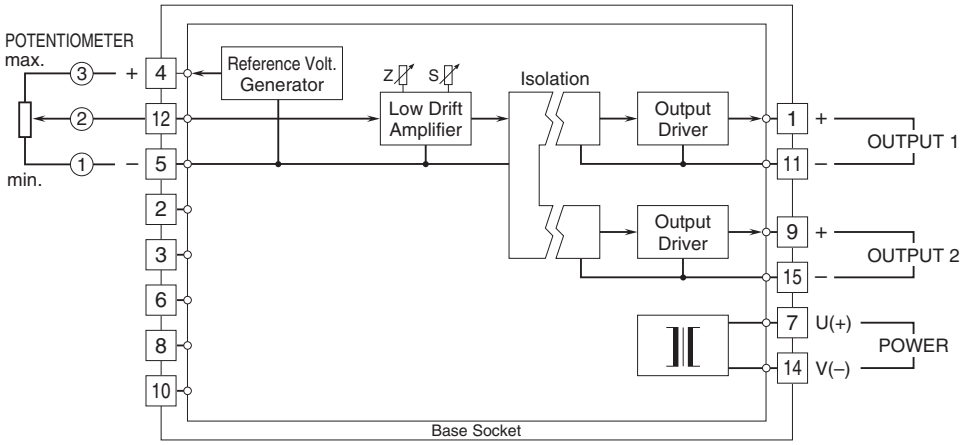

⚠ Specifications are subject to change without notice.