Common Mode Inductor

Parameter	Min.	Max.	Units
Inductance *	33		mH
DCR		2.0	Ω
Current		0.4	A_{RMS}
Leakage Inductance *		330	µH
Interwinding capacitance		12	pF
SRF 200 kHz Typ.			

*** Inductance tested at 100mV$_{RMS}$ and 1 kHz**

Rated Voltage 250 VAC

Hipot (Isolation) 3750 VAC

Insulation Resistance 100MΩ

Temperature Rise 40°C Max.

Operating Temperature Range -40°C to +80°C

Schematic Diagram

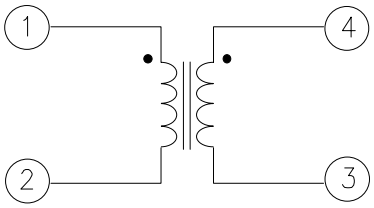

Physical Dimensions

inches (mm)

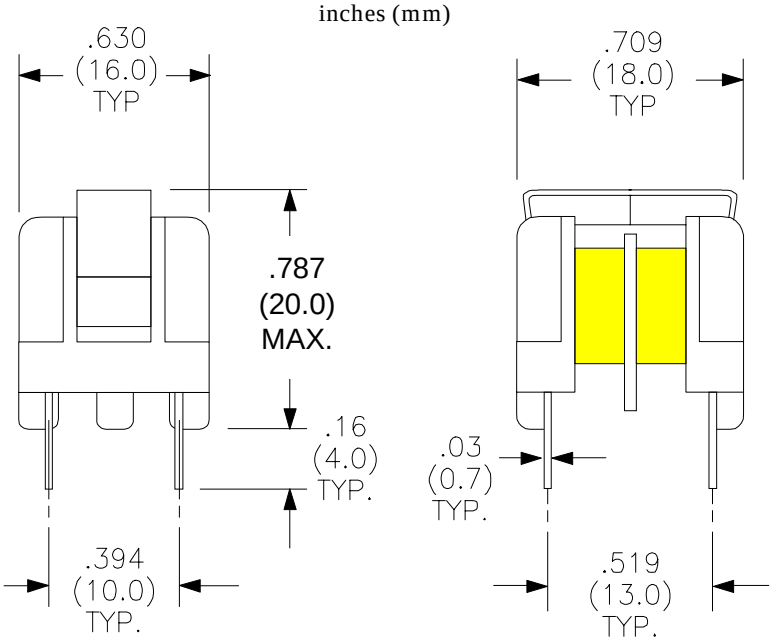

RHOMBUS P/N: **L-14212**	
CUST P/N:	NAME:
DATE: **11/08/99**	SHEET: 1 OF 1

Rhombus Industries Inc.
Transformers & Magnetic Products

15801 Chemical Lane, Huntington Beach, CA 92649
Phone: (714) 898-0960
FAX: (714) 896-0971

www.rhombus-ind.com