Surface Mount Toroidal Inductors

Designed for filter applications with low ET values


Toroid mount meets UL94VO

Designed for IR and Vapor Phase Reflow Systems

Built using Powdered Iron material.

Sendust and MPP materials are available, contact the factory.

Part Number	L ± 15% (µH)	DCR Max. (mΩ)	I Max. (100 CM/A) (Amps	Size Code
L-15000	7.0	73	1.0	1
L-15001	3.4	37	1.6	1
L-15002	1.8	20	2.5	1
L-15003	0.9	12	4.0	1
L-15004	20.7	102	1.4	2
L-15005	14.4	52	2.2	2
L-15006	9.2	28	3.5	2
L-15007	5.2	17	5.6	2
L-15008	39.6	130	1.6	3
L-15009	22.0	65	2.5	3
L-15010	12.6	33	4.0	3
L-15011	6.7	17	6.4	3
L-15012	62.0	180	1.6	4
L-15013	36.0	90	2.5	4
L-15014	22.0	46	4.0	4
L-15015	12.7	24	6.4	4

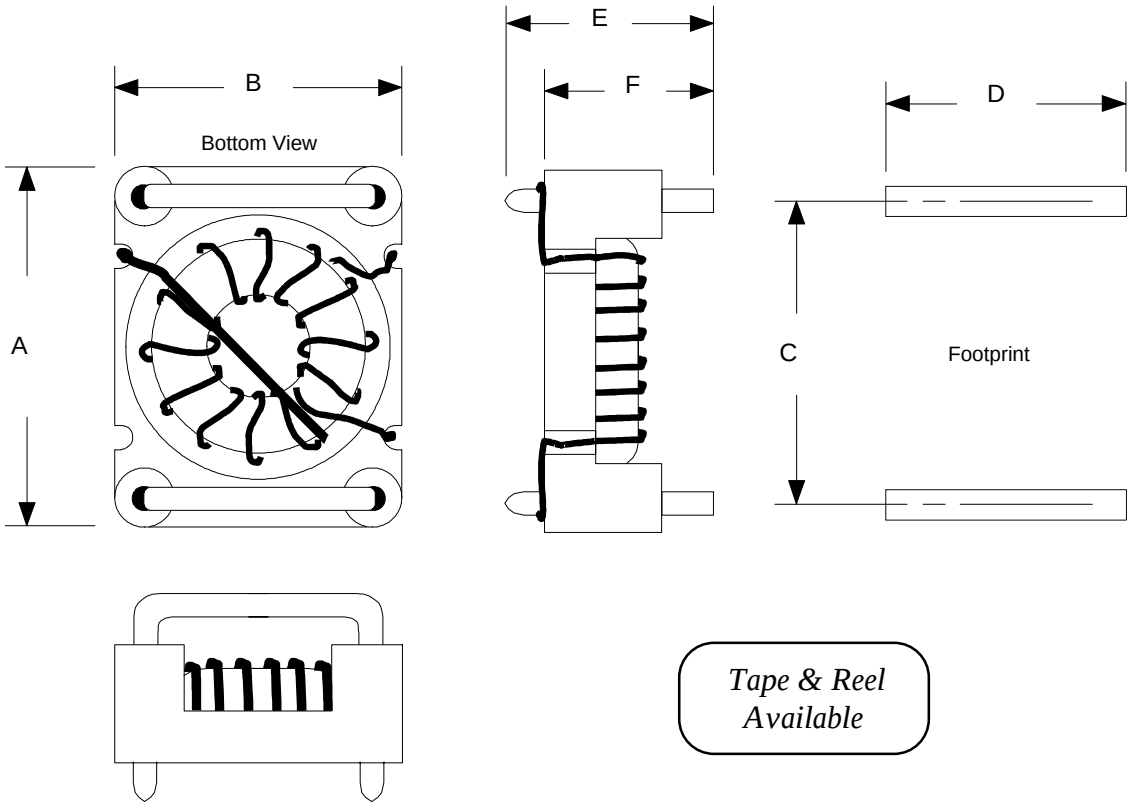

Tape & Reel Available

Package Dimensions in Inches

Size Code	A Max.	B Max.	C ± .005	D ± .005	E Max.	F ± .010
1	0.400	0.350	0.300	0.245	0.250	0.190
2	0.485	0.430	0.375	0.320	0.330	0.275
3	0.625	0.525	0.500	0.400	0.400	0.315
4	0.725	0.575	0.600	0.450	0.410	0.325

Rhombus Industries Inc.
Transformers & Magnetic Products

15801 Chemical Lane
Huntington Beach, California 92649-1595
Phone: (714) 898-0960 • FAX: (714) 896-0971