HIGH CURRENT COUPLED INDUCTOR

SELF LEADED SURFACE MOUNT PACKAGE ● FREQUENCY RANGE UP TO 1 MHZ

Electrical Specifications at 25°C. Operating Temp. Range: -30°C to +130°C

L with No DC (µH ±20%)	L with DC (µH)	I_{DC} (Amps)	E-T Product (V-µs)	DCR max. (mΩ)
0.88	0.53	23.8	1.0	6.0

Schematic Diagram



Physical Dimensions
inches (mm)

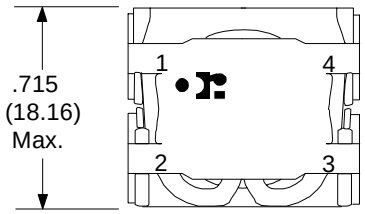

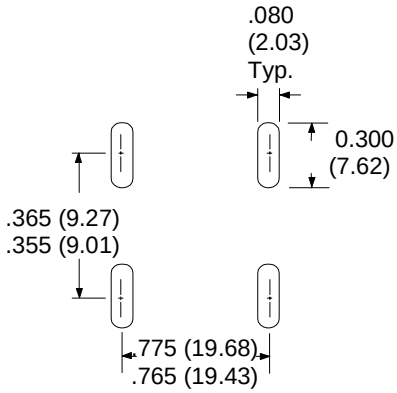

Suggested PCB Layout





RHOMBUS P/N: L-15329	
CUST P/N:	NAME:
DATE: 5/12/02	SHEET: 1 OF 1

Rhombus Industries Inc.
Transformers & Magnetic Products

15801 Chemical Lane, Huntington Beach, CA 92649
Phone: (714) 898-0960
FAX: (714) 896-0971

www.rhombus-ind.com