
SMPS Inductor

Iron Powder Material (Hydrogen Reduced)

Well Suited for Switch Mode Power Supplies and Regulator Applications.

Wire UL rated Class B (130° C) or better


Schematic Diagram



Electrical Specifications at 25°C

Part Number	L (1) (µH) Typ.	ET_{OP} (2) (VµS) Max.	I max. Amps	DCR Nom. (Ω)
L-20573	77	33	1.54	0.2

1) Typical Inductance in ciruit.
   Inductance (No DC) 77µH ±20%
2) Operational ET rated at 150 kHz.
3) Operating Temperature -30° To +130° C

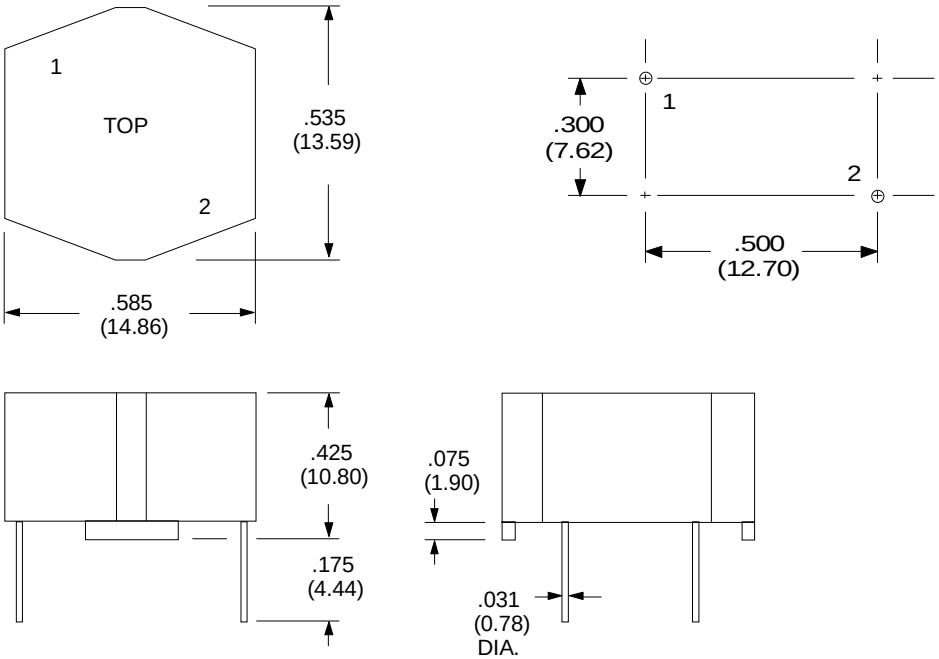

Physical Dimensions inches (mm)

RHOMBUS P/N: L-20573	
CUST P/N:	NAME:
DATE: 2/14/97	SHEET: 1 OF 1

Rhombus Industries Inc.
Transformers & Magnetic Products

www.rhombus-ind.com

15801 Chemical Lane,
Huntington Beach, CA 92649-1595
Phone: (714) 898-0960 • FAX: (714) 896-0971