Common Mode Choke


Parameter	Min.	Max.	Units
Inductance [1]	250		µH
DCR		0.8	Ω
Current @500 cm / A		0.032	A_{RMS}
Leakage Inductance		25	µH
Interwinding Capacitance		16	pF
SRF		6.1	MHz

1. Inductance tested at 100mV_{RMS} and 10 kHz


Hipot (Isolation) 1500 VAC

Operating
Temperature Range -25^{0}C to +60^{0}C

Schematic
Diagram

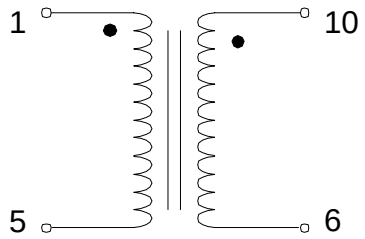

Physical Dimensions
inches (mm)

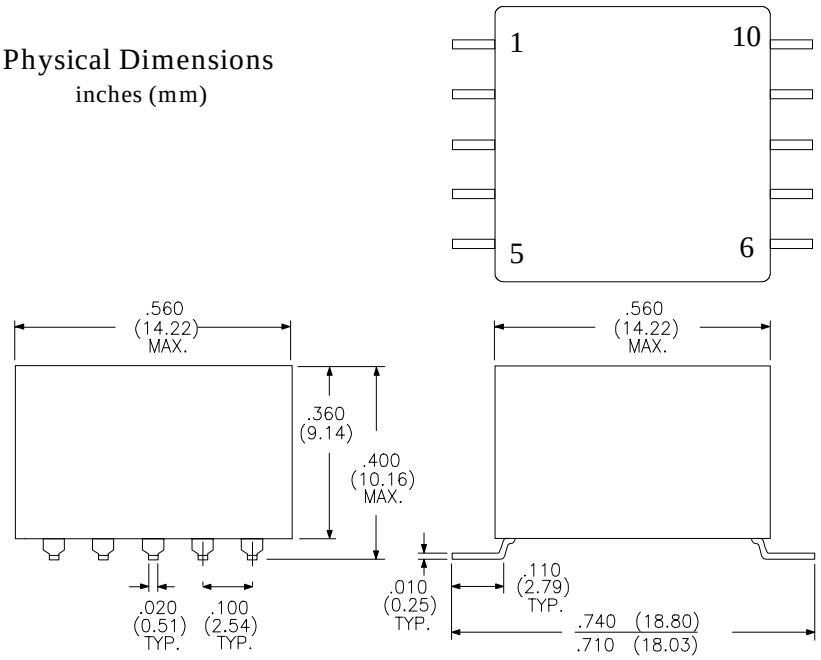

RHOMBUS P/N: **L-45072**	
CUST P/N:	NAME:
DATE: **3/28/00**	SHEET: 1 OF 1

Rhombus Industries Inc.
Transformers & Magnetic Products

15801 Chemical Lane, Huntington Beach, CA 92649
Phone: (714) 898-0960
FAX: (714) 896-0971

www.rhombus-ind.com