# Power Choke Inductors

Designed for Noise, Spike & Filtering applications.

Electrical Specifications at 25°C

| Part Number | L (1) ±10% (µH) | DCR ±20% (Ω) | I Max. (A) |
|---|---|---|---|
| L-61204ST | 100 | 0.20 | 0.82 |

1. Tested at 10 kHz & 0.1 $V_{RMS}$

## Applications

- Power Supplies
- Filters
- SCR and Triac Controls
- OEM Equipment
- Telephones
- TV, CRT'S, VCR'S
- Appliances

Coils finished with UL rated Polyoefin Shrink Tube.

Variations on electrical parametersof parts listed are available - Please contact factory.

Physical Dimensions
inches (mm)

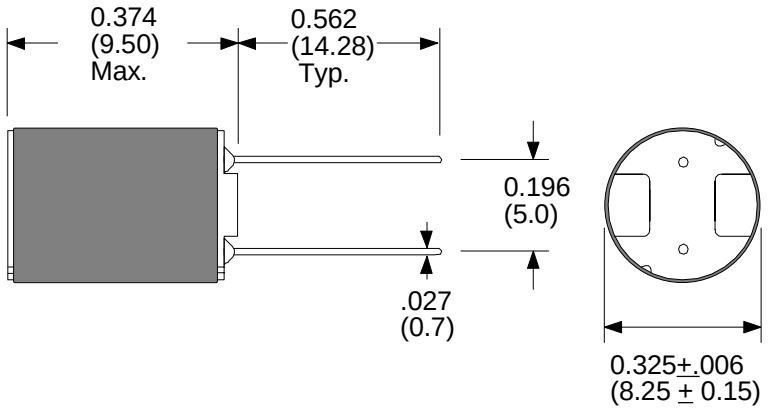


Schematic
Diagram




| RHOMBUS P/N: L-61204ST | |
|---|---|
| CUST P/N: | NAME: |
| DATE: 01/24/02 | SHEET: 1 OF 1 |

Rhombus Industries Inc.
*Transformers & Magnetic Products*

15801 Chemical Lane, Huntington Beach, CA 92649
Phone: (714) 898-0960
FAX: (714) 896-0971

www.rhombus-ind.com