

Common Mode Inductor For DC / DC Power supply

Single Layer Windings with Spacers specially designed by Rhombus Industries to provide 3mm Creepage and Clearance for International Safety Compliance.

PARAMETER	MIN.	TYP.	MAX.	UNITS
Inductance @ 0.20 Vrms / 1 kHz	1.58		2.37	mH
DCR Max. of each Winding		4.6		mΩ
RMS rated Current for 40°C rise.			40	A
Leakage Inductance		28		μH
Dielectric Strength	1250			Vrms
Creepage Between Windings	3.0			mm


DO NOT EXCEED RATED RMS CURRENT.

Operating Temperature: These parts are made with materials rated for 130°C minimum, and these components can be safely operated up to 130°C. *

* AMBIENT + TEMPERATURE RISE. In addition, inductance will be effected by an increase in temperature. Typically:

20% increase to 50°C
40% increase to 100°C
65% increase to 130°C


Physical Dimensions - inches (mm)

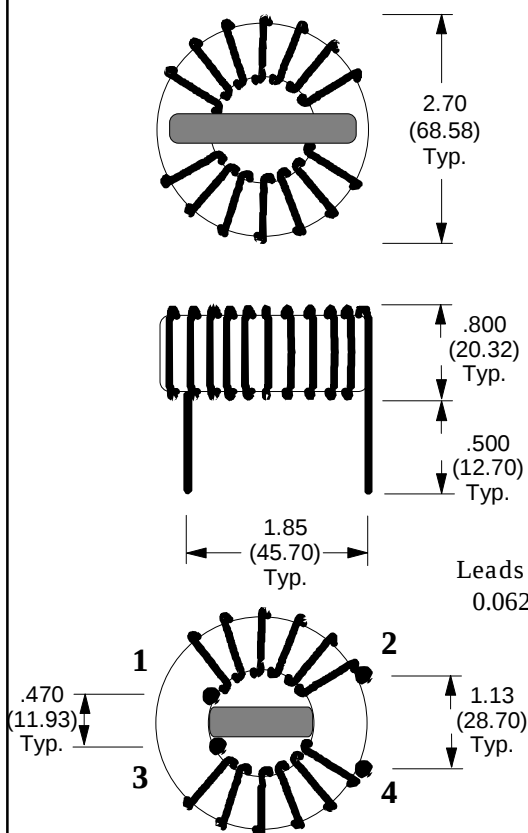

LEADS ARE #11 AWG
Lead Diameter .090(2.28)

Leads Stripped to within
0.062 (1.58) of the coil.

Schematic Diagram

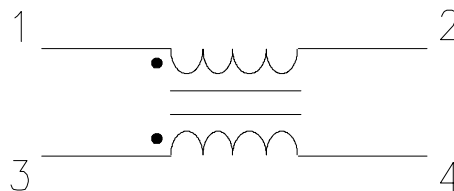

RHOMBUS P/N: **L-669**

CUST P/N:

NAME:

DATE: **01/08/01**

SHEET: 1 OF 1



**Rhombus
Industries Inc.**
Transformers & Magnetic Products

15801 Chemical Lane, Huntington Beach, CA 92649
Phone: (714) 898-0960
FAX: (714) 896-0971

www.rhombus-ind.com