
L4940 SERIES

VERY LOW DROP 1.5A REGULATORS

- PRECISE 5, 8.5, 10, 12V OUTPUTS
- LOW DROPOUT VOLTAGE (500mV Typ. at 1.5A)
- VERY LOW QUIESCENT CURRENT
- THERMAL SHUTDOWN
- SHORT CIRCUIT PROTECTION
- REVERSE POLARITY PROTECTION

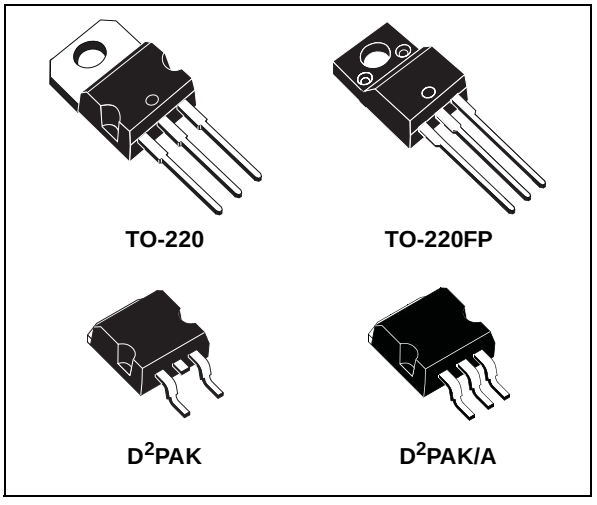

DESCRIPTION

The L4940 series of three terminal positive regulators is available in TO-220, TO-220FP and D^2PAK packages and with several fixed output voltages, making it useful in a wide range of industrial and consumer applications. Thanks to its very low input/output voltage drop, these devices are particularly suitable for batteries powered equipment, reducing consumption and prolonging battery life. Each type employs internal current limiting, antisaturation circuit, thermal shut-down and safe area protection.

Figure 1: Block Diagram

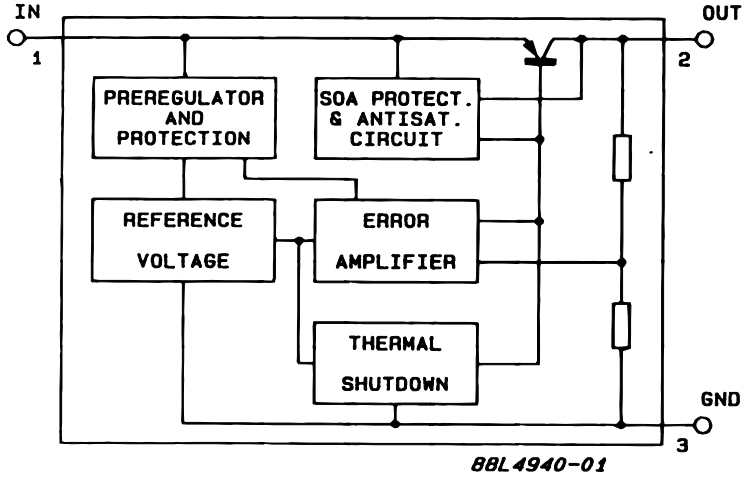


Table 1: Absolute Maximum Ratings

Symbol	Parameter		Value	Unit
V_I	Forward Input Voltage		30	V
V_{IR}	Reverse Input Voltage	V_O=5V R_O=100Ω	-15	V
		V_O=8.5V R_O=180Ω	-15	V
		V_O=10V R_O=200Ω	-15	V
		V_O=12V R_O=240Ω	-15	V
I_O	Output Current		Internally Limited	mA
P_D	Power Dissipation		Internally Limited	mW
T_{stg}	Storage Temperature Range		-40 to +150	°C
T_{op}	Operating Junction Temperature Range		-40 to +150	°C

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

Table 2: Thermal Data

Symbol	Parameter	TO-220	TO-220FP	D^2PAK	Unit
$R_{thj\text{-}case}$	Thermal Resistance Junction-case	3	5	3	°C/W
$R_{thj\text{-}amb}$	Thermal Resistance Junction-ambient	50	60	62.5	°C/W

Figure 2: Connection Diagram (top view)

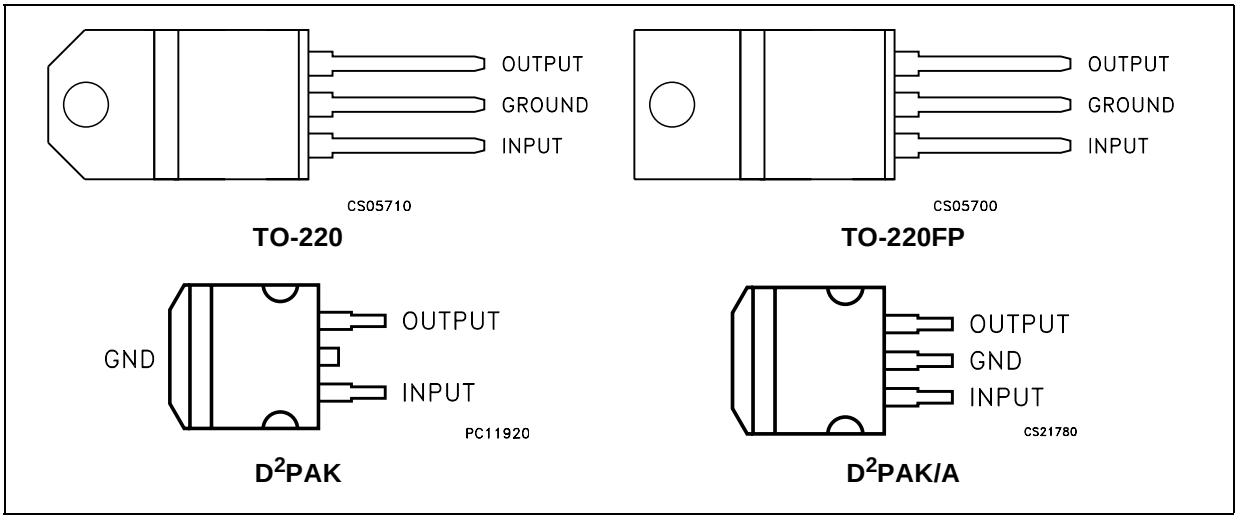


Table 3: Order Codes

TO-220	TO-220FP	D^2PAK (*)	D^2PAK/A (**)	OUTPUT VOLTAGE
L4940V5	L4940P5	L4940D2T5	L4940D2M5	5 V
L4940V85	L4940P85	L4940D2T85	L4940D2M85	8.5 V
L4940V10	L4940P10	L4940D2T10	L4940D2M10	10 V
L4940V12	L4940P12	L4940D2T12	L4940D2M12	12 V

(*) Available in Tape & Reel with the suffix "-TR".

(**) Available on Request.

TEST CIRCUITS

Figure 3: DC Parameter

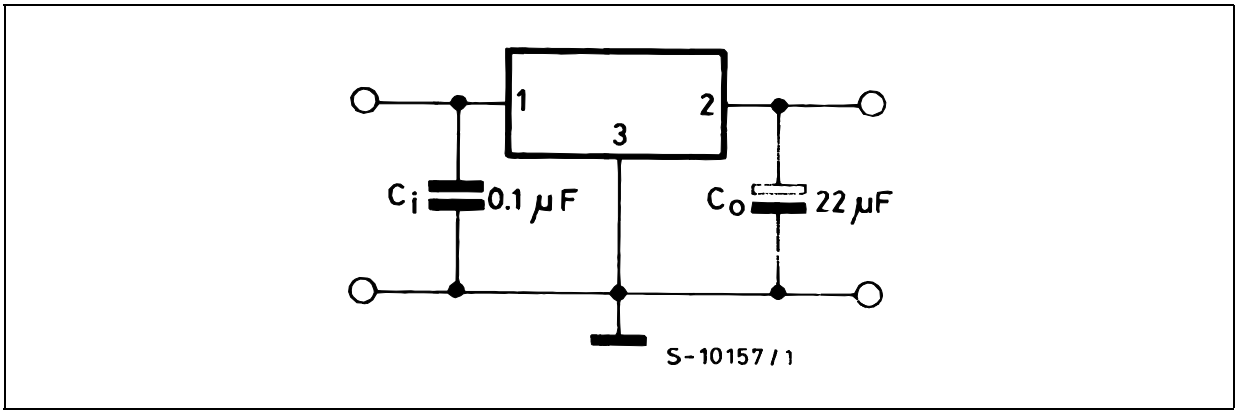


Figure 4: Load Rejection

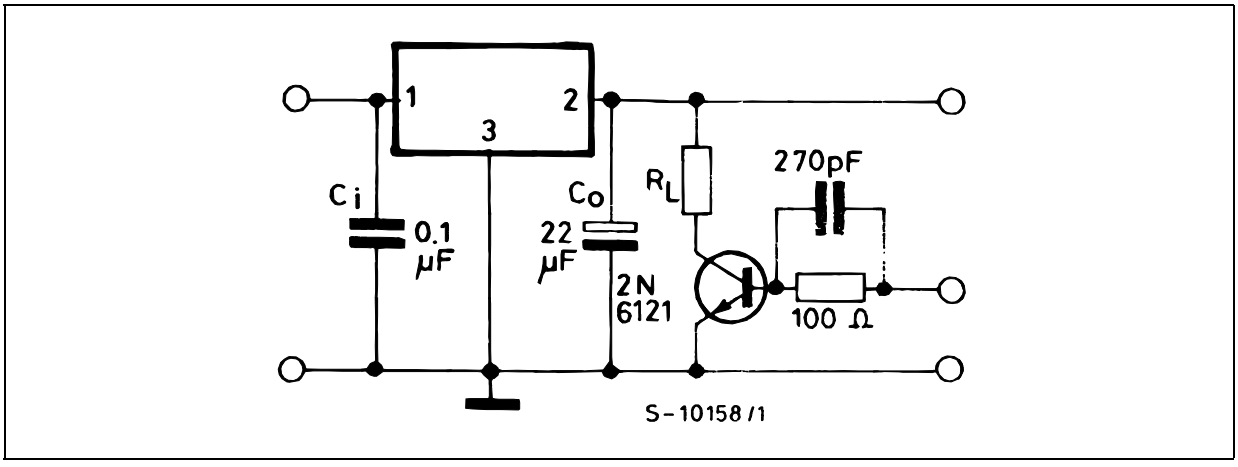


Figure 5: Ripple Rejection

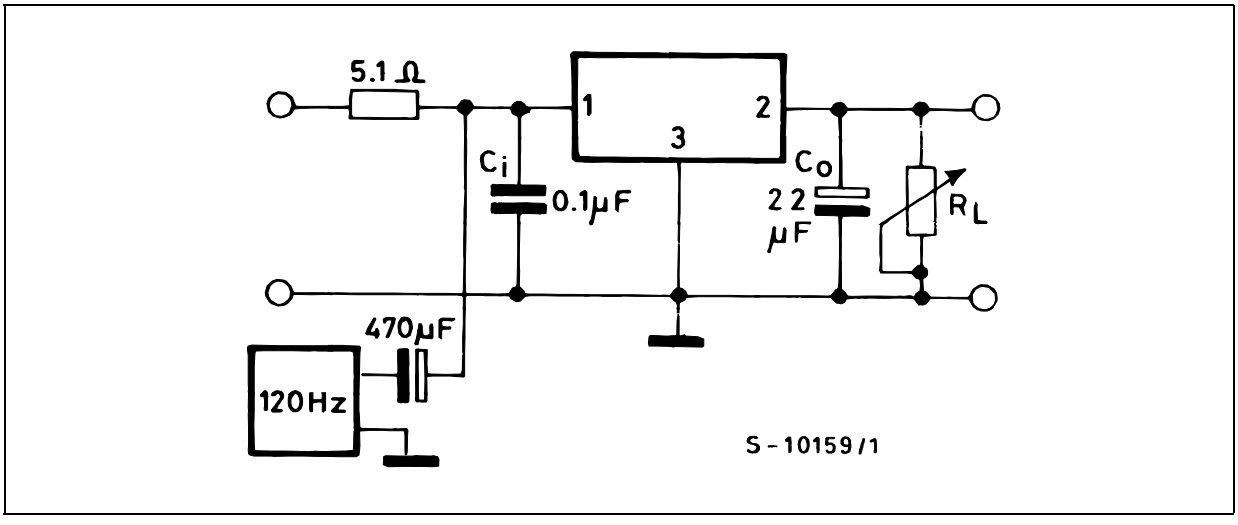


Table 4: Electrical Characteristics Of L4940V5 (Refer to test circuit, V_I=7V, C_I = 0.1µF, C_O = 22µF, T_J = 25°C, unless otherwise specified.)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
V_O	Output Voltage	I_O = 500 mA		4.9	5	5.1	V
V_O	Output Voltage	I_O = 5mA to 1.5A	V_I = 6.5 to 15V	4.8	5	5.2	V
V_I	Input Voltage	I_O = 5 mA				17	V
ΔV_O	Line Regulation	V_I = 6 to 17V	I_O = 5 mA		4	10	mV
ΔV_O	Load Regulation	I_O = 5mA to 1.5A			8	25	mV
		I_O = 0.5A to 1A			5	15	mV
I_q	Quiescent Current	I_O = 5 mA			5	8	mA
		I_O = 1.5A	V_I = 6.5V		30	50	mA
ΔI_q	Quiescent Current Change	I_O = 5 mA				3	mA
		I_O = 1.5A	V_I = 6.5 to 16V			15	mA
$\Delta V_O/\Delta T$	Output Voltage Drift				0.5		mv/°C
SVR	Supply Voltage Rejection	f = 120Hz	I_O = 1A	58	68		dB
V_d	Dropout Voltage	I_O = 0.5A			200	400	mV
		I_O = 1.5A			500	900	mV
I_{sc}	Short Circuit Current	V_I = 14V			2	2.7	A
		V_I = 6.5V			2.2	2.9	

Table 5: Electrical Characteristics Of L4940V85 (Refer to test circuit, V_I=10.5V, C_I = 0.1µF, C_O = 22µF,T_J = 25°C, unless otherwise specified.)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
V_O	Output Voltage	I_O = 500 mA		8.3	8.5	8.7	V
V_O	Output Voltage	I_O = 5mA to 1.5A	V_I = 10.2 to 16V	8.15	8.5	8.85	V
V_I	Input Voltage	I_O = 5 mA				17	V
ΔV_O	Line Regulation	V_I = 9.5 to 17V	I_O = 5 mA		4	9	mV
ΔV_O	Load Regulation	I_O = 5mA to 1.5A			12	30	mV
		I_O = 0.5A to 1A			8	16	mV
I_q	Quiescent Current	I_O = 5 mA			4	8	mA
		I_O = 1.5A	V_I = 10.2V		30	50	mA
ΔI_q	Quiescent Current Change	I_O = 5 mA				2.5	mA
		I_O = 1.5A	V_I = 10.2 to 16V			15	mA
$\Delta V_O/\Delta T$	Output Voltage Drift				0.8		mv/°C
SVR	Supply Voltage Rejection	f = 120Hz	I_O = 1A	58	66		dB
V_d	Dropout Voltage	I_O = 0.5A			200	400	mV
		I_O = 1.5A			500	900	mV
I_{sc}	Short Circuit Current	V_I = 14V			2	2.7	A
		V_I = 10.2V			2.2	2.9	

Table 6: Electrical Characteristics Of L4940V10 (Refer to test circuit, V_I=12V, C_I = 0.1µF, C_O = 22µF, T_J = 25°C, unless otherwise specified.)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
V_O	Output Voltage	I_O = 500 mA		9.8	10	10.2	V
V_O	Output Voltage	I_O = 5mA to 1.5A	V_I = 11.7 to 15V	9.6	10	10.4	V
V_I	Input Voltage	I_O = 5 mA				17	V
ΔV_O	Line Regulation	V_I = 11 to 17V	I_O = 5 mA		3	8	mV
ΔV_O	Load Regulation	I_O = 5mA to 1.5A			15	35	mV
		I_O = 0.5A to 1A			10	20	mV
I_q	Quiescent Current	I_O = 5 mA			5	8	mA
		I_O = 1.5A	V_I = 11.7V		30	50	mA
ΔI_q	Quiescent Current Change	I_O = 5 mA				2	mA
		I_O = 1.5A	V_I = 11.7 to 16V			13	mA
$\Delta V_O/\Delta T$	Output Voltage Drift				1		mv/°C
SVR	Supply Voltage Rejection	f = 120Hz	I_O = 1A	56	62		dB
V_d	Dropout Voltage	I_O = 0.5A			200	400	mV
		I_O = 1.5A			500	900	mV
I_{sc}	Short Circuit Current	V_I = 14V			2	2.7	A
		V_I = 11.7V			2.2	2.9	

Table 7: Electrical Characteristics Of L4940V12 (Refer to test circuit, V_I=14V, C_I = 0.1µF, C_O = 22µF, T_J = 25°C, unless otherwise specified.)

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Unit
V_O	Output Voltage	I_O = 500 mA		11.75	12	12.25	V
V_O	Output Voltage	I_O = 5mA to 1.5A	V_I = 13.8 to 15V	11.5	12	12.5	V
V_I	Input Voltage	I_O = 5 mA				17	V
ΔV_O	Line Regulation	V_I = 13 to 17V	I_O = 5 mA		3	7	mV
ΔV_O	Load Regulation	I_O = 5mA to 1.5A			15	35	mV
		I_O = 0.5A to 1A			10	25	mV
I_q	Quiescent Current	I_O = 5 mA			4	8	mA
		I_O = 1.5A	V_I = 13.8V		30	50	mA
ΔI_q	Quiescent Current Change	I_O = 5 mA				1.5	mA
		I_O = 1.5A	V_I = 13.8 to 16V			10	mA
$\Delta V_O/\Delta T$	Output Voltage Drift				1.2		mv/°C
SVR	Supply Voltage Rejection	f = 120Hz	I_O = 1A	55	61		dB
V_d	Dropout Voltage	I_O = 0.5A			200	400	mV
		I_O = 1.5A			500	900	mV
I_{sc}	Short Circuit Current	V_I = 14V			2	2.7	A
Z_O	Output Impedance	f = 120Hz	I_O = 0.5A		40		mΩ

TYPICAL CHARACTERISTICS

Figure 6: Dropout Voltage vs Output Current

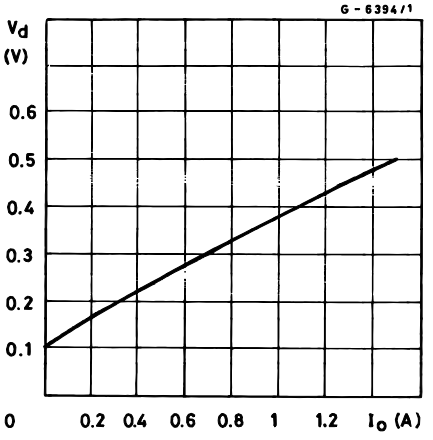


Figure 7: Dropout Voltage vs Temperature

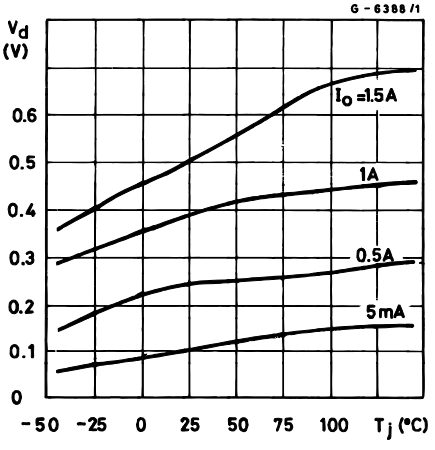


Figure 8: Output Voltage vs Temperature (L4940V5)

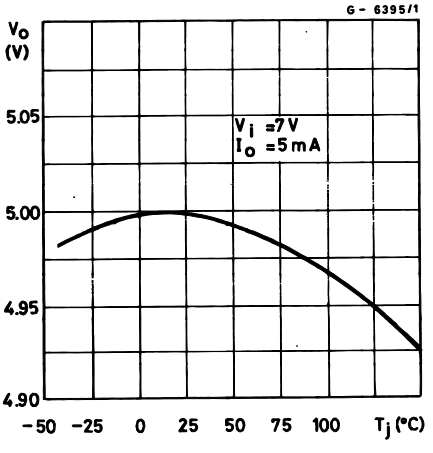


Figure 9: Output Voltage vs Temperature (L4940V85)

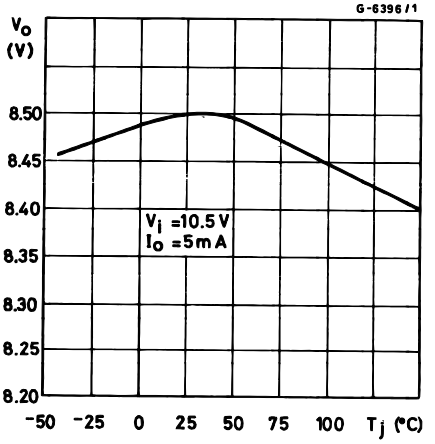


Figure 10: Output Voltage vs Temperature (L4940V10)

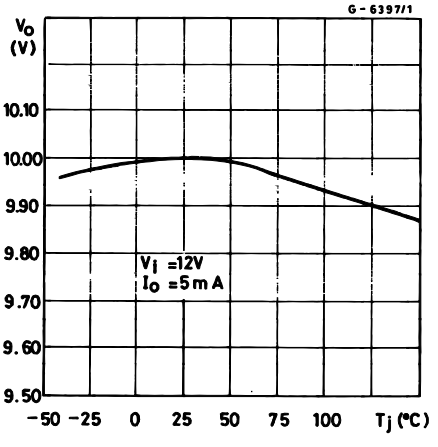


Figure 11: Output Voltage vs Temperature (L4940V12)

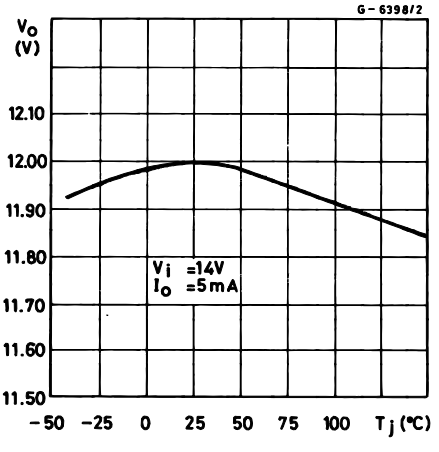


Figure 12: Quiescent Current vs Temperature (L4940V5)

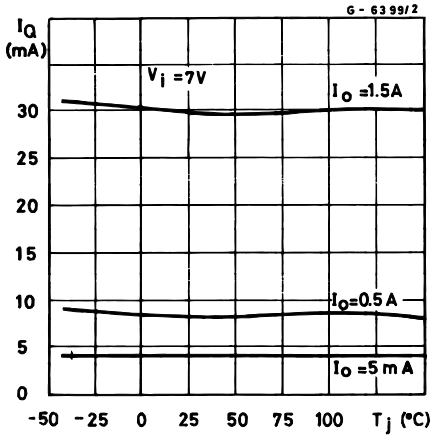


Figure 13: Quiescent Current vs Input Voltage (L4940V5)

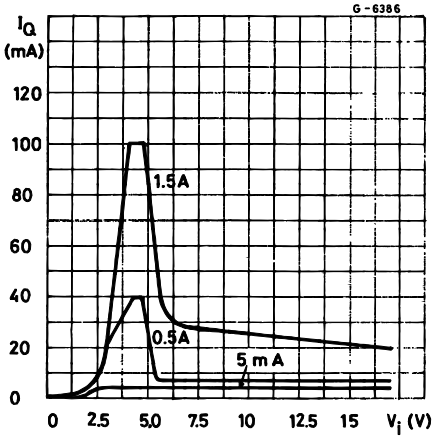


Figure 14: Quiescent Current vs Output Current (L4940V5)

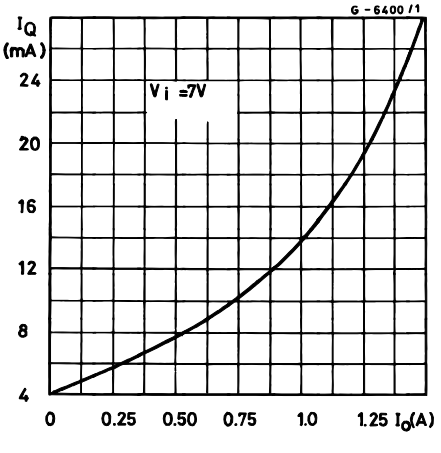


Figure 15: Short Circuit Current vs Temperature (L4940V5)

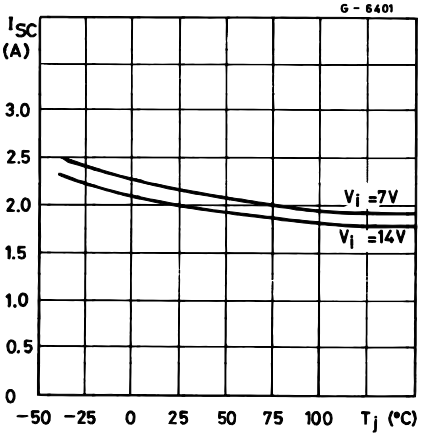


Figure 16: Peak Output Current vs Input/Output Differential Voltage (L4940V5)

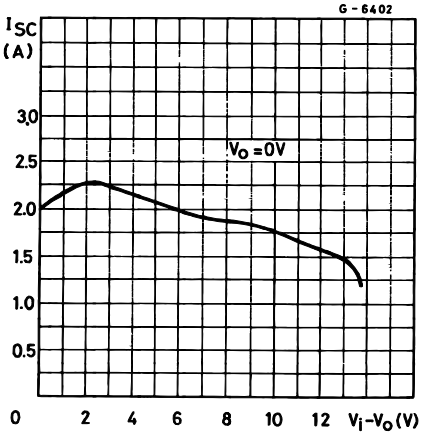


Figure 17: Low Voltage Behavior (L4940V5)

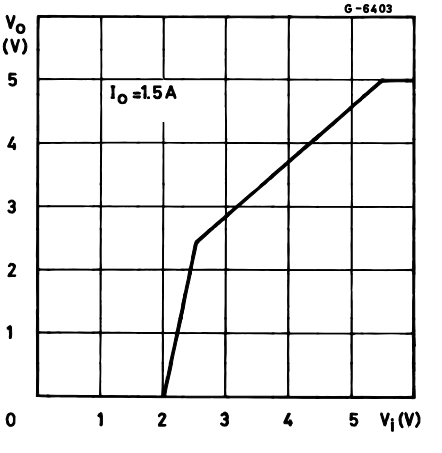


Figure 18: Low Voltage Behavior (L4940V85)

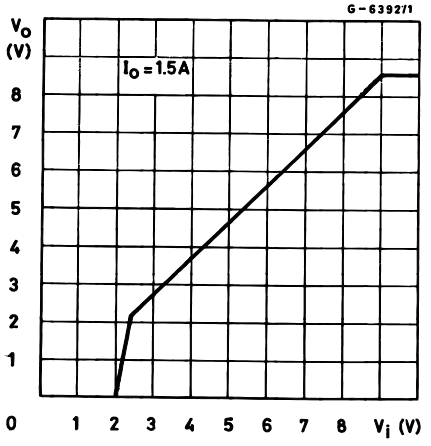


Figure 19: Low Voltage Behavior (L4940V10)

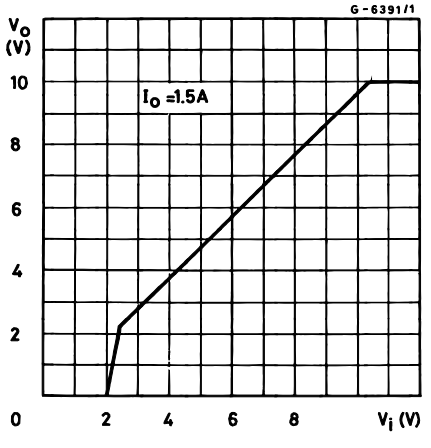


Figure 20: Low Voltage Behavior (L4940V12)

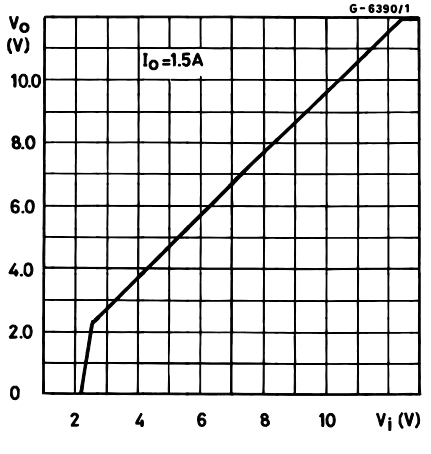


Figure 21: Supply Voltage Rejection vs Frequency (L4940V5)

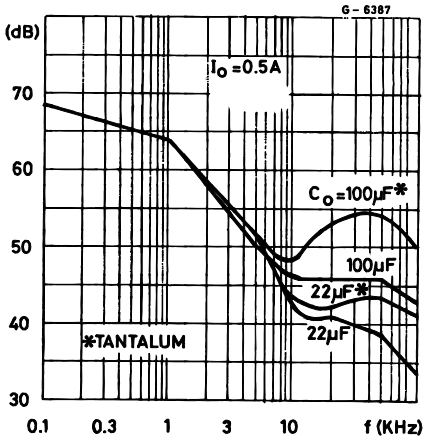


Figure 22: Supply Voltage Rejection vs Output Current (L4940V5)

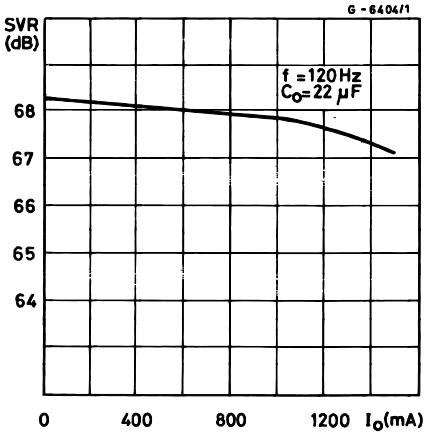


Figure 23: Lad Dump Characteristics (L4940V5)

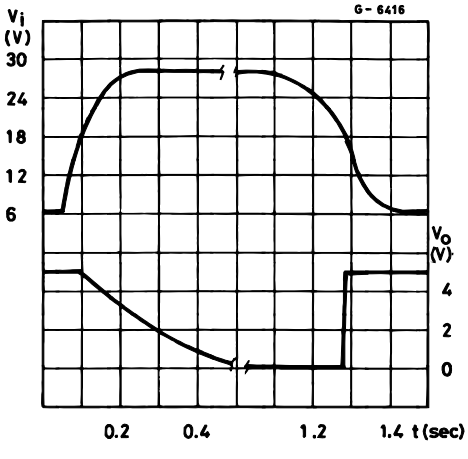


Figure 24: Line Transient Response (L4940V5)

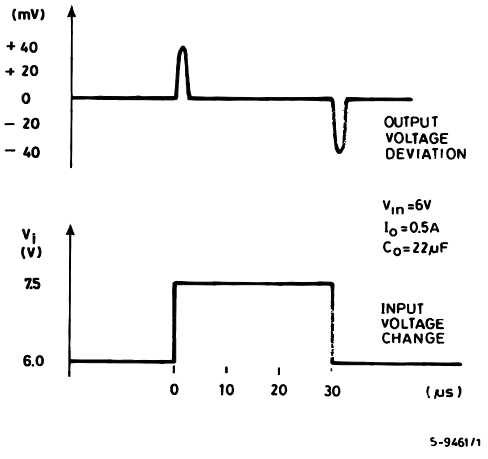


Figure 25: Total Power Dissipation

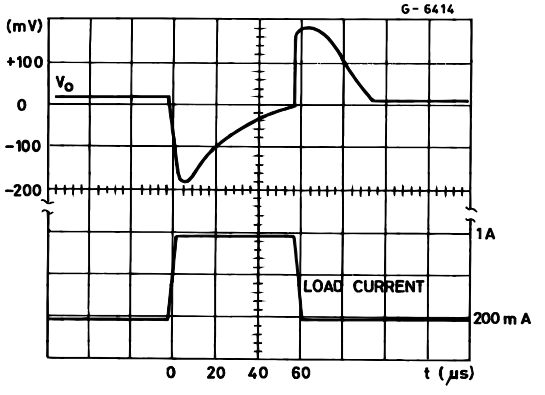


Figure 26: Load Transient Response

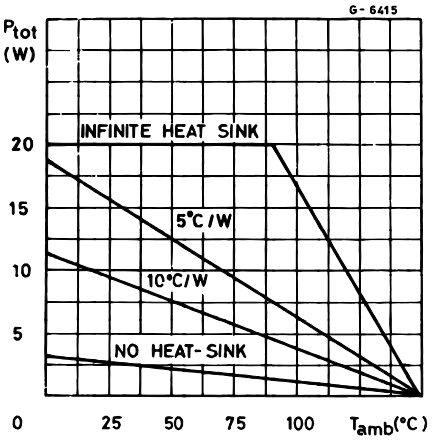


Figure 27: Distributed Supply with On-card L4940 and L4941 low drop regulator



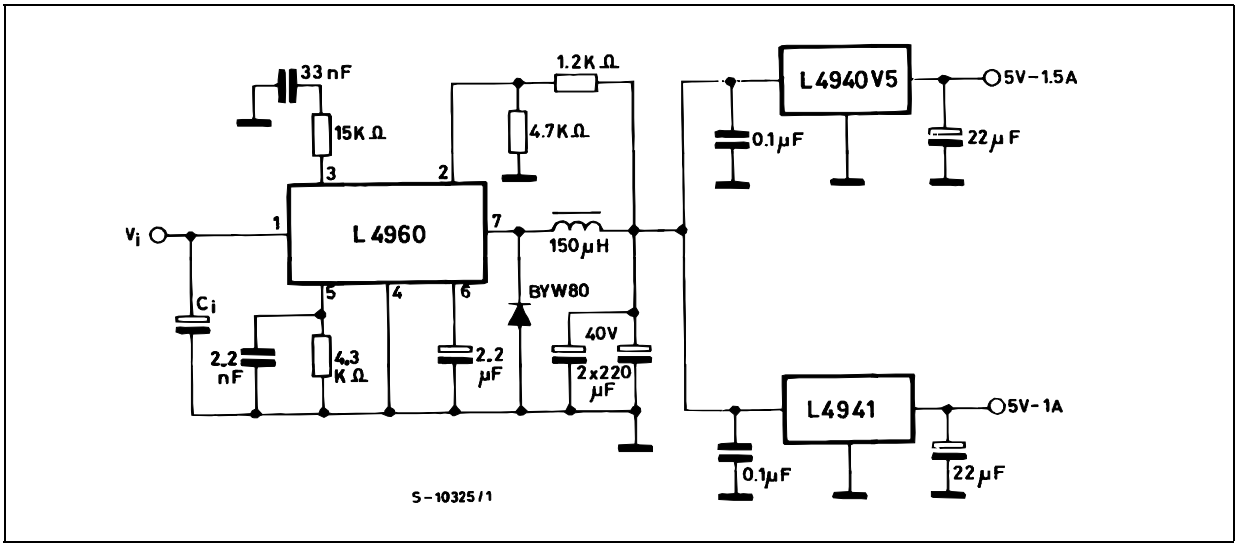


Figure 28: Distributed Supply with On-card L4940 and L4941 low drop regulator

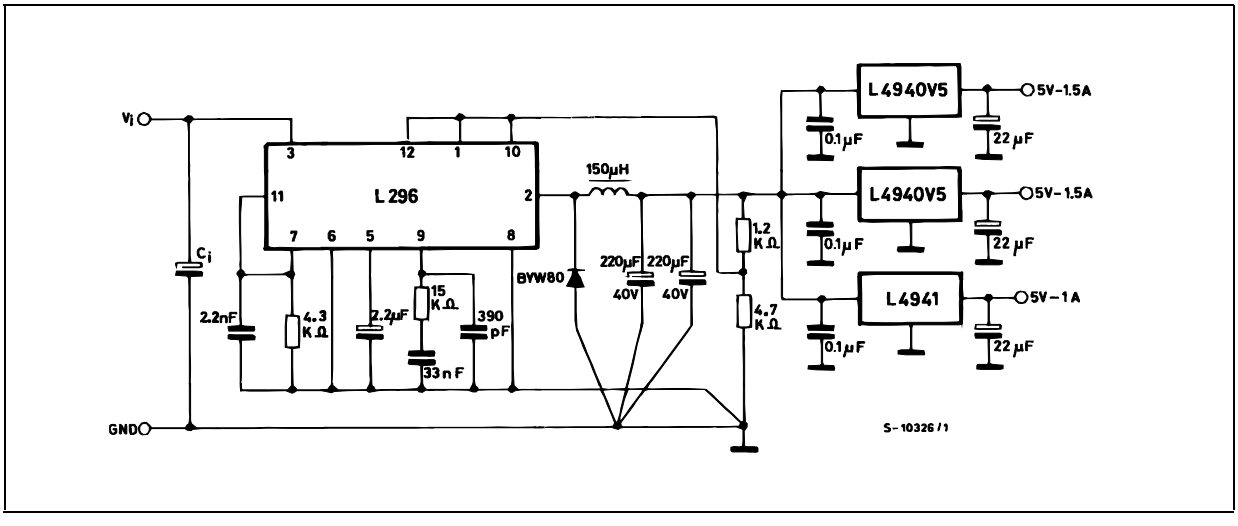

ADVANTAGES OTF THESE APPLICATION ARE:
On card regulation with short-circuit and thermal protection on each output.
Vary high total system efficiency due to the switching preregulation and very low-drop postregulation


Figure 29: Distributed Supply with On-card L4940 and L4941 low drop regulator

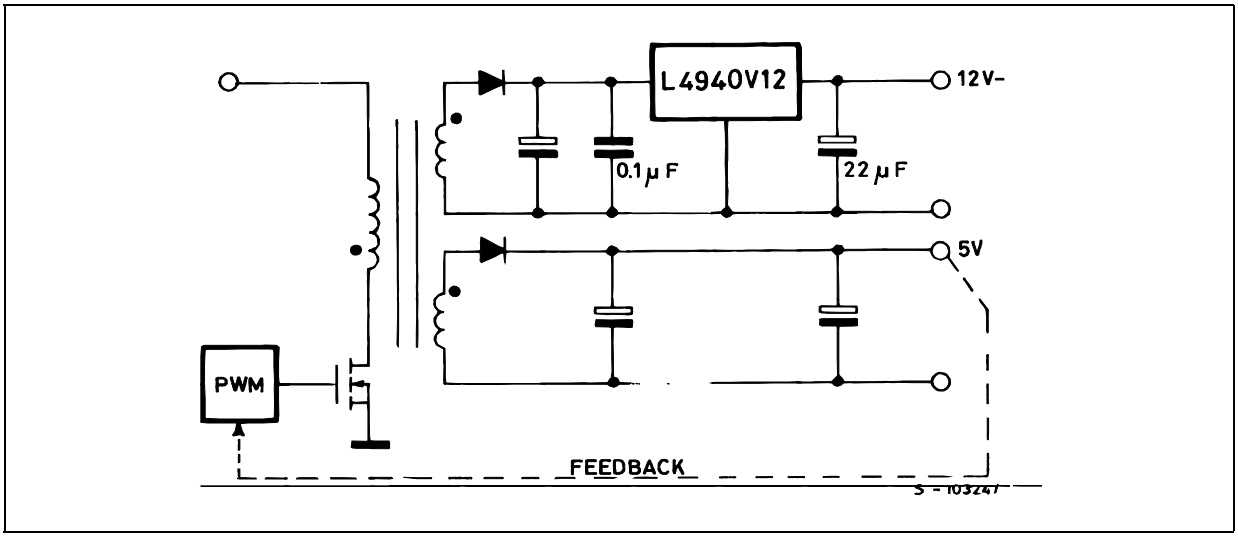

ADVANTAGES OF THIS CONFIGURATION ARE:
Very high regulation (line and load on both the output voltage
12V output short circuit and thermally protected
Very high efficiency on the 12 V output due to the low drop regulator

TO-220 MECHANICAL DATA


DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
C	1.23		1.32	0.048		0.051
D	2.40		2.72	0.094		0.107
D1		1.27			0.050	
E	0.49		0.70	0.019		0.027
F	0.61		0.88	0.024		0.034
F1	1.14		1.70	0.044		0.067
F2	1.14		1.70	0.044		0.067
G	4.95		5.15	0.194		0.203
G1	2.4		2.7	0.094		0.106
H2	10.0		10.40	0.393		0.409
L2		16.4			0.645	
L4	13.0		14.0	0.511		0.551
L5	2.65		2.95	0.104		0.116
L6	15.25		15.75	0.600		0.620
L7	6.2		6.6	0.244		0.260
L9	3.5		3.93	0.137		0.154
DIA.	3.75		3.85	0.147		0.151

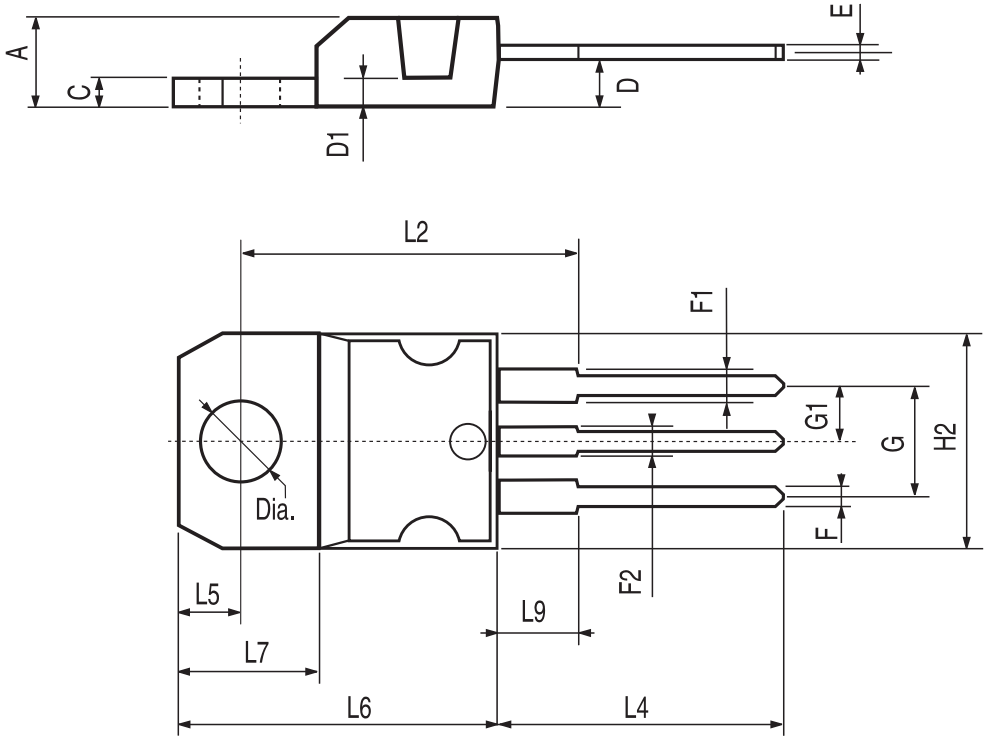

P011C

TO-220FP MECHANICAL DATA


DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
B	2.5		2.7	0.098		0.106
D	2.5		2.75	0.098		0.108
E	0.45		0.70	0.017		0.027
F	0.75		1	0.030		0.039
F1	1.15		1.50	0.045		0.059
F2	1.15		1.50	0.045		0.059
G	4.95		5.2	0.194		0.204
G1	2.4		2.7	0.094		0.106
H	10.0		10.40	0.393		0.409
L2		16			0.630	
L3	28.6		30.6	1.126		1.204
L4	9.8		10.6	0.385		0.417
L5	2.9		3.6	0.114		0.142
L6	15.9		16.4	0.626		0.645
L7	9		9.3	0.354		0.366
DIA.	3		3.2	0.118		0.126

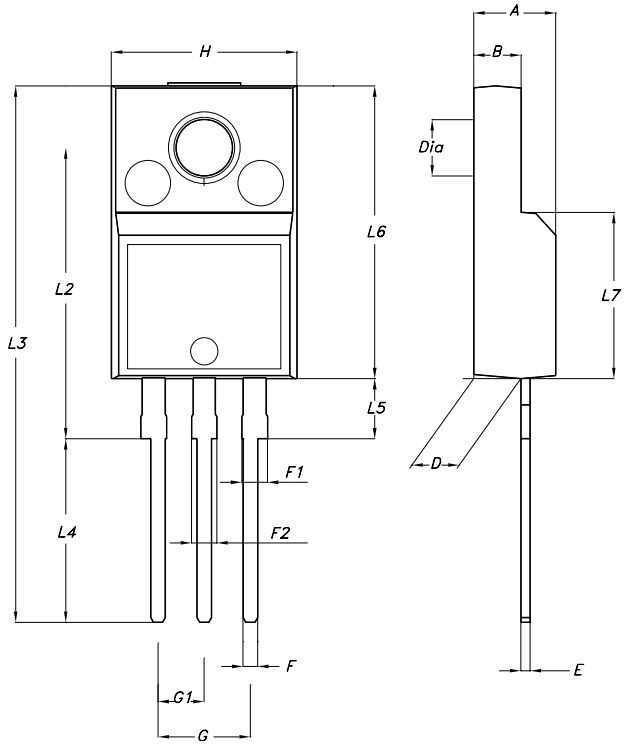

7012510A-H


D²PAK MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	4.4		4.6	0.173		0.181
A1	2.49		2.69	0.098		0.106
A2	0.03		0.23	0.001		0.009
B	0.7		0.93	0.027		0.036
B2	1.14		1.7	0.044		0.067
C	0.45		0.6	0.017		0.023
C2	1.23		1.36	0.048		0.053
D	8.95		9.35	0.352		0.368
D1		8			0.315	
E	10		10.4	0.393		0.409
E1		8.5			0.335	
G	4.88		5.28	0.192		0.208
L	15		15.85	0.590		0.624
L2	1.27		1.4	0.050		0.055
L3	1.4		1.75	0.055		0.068
M	2.4		3.2	0.094		0.126
R		0.4			0.016	
V2	0°		8°	0°		8°

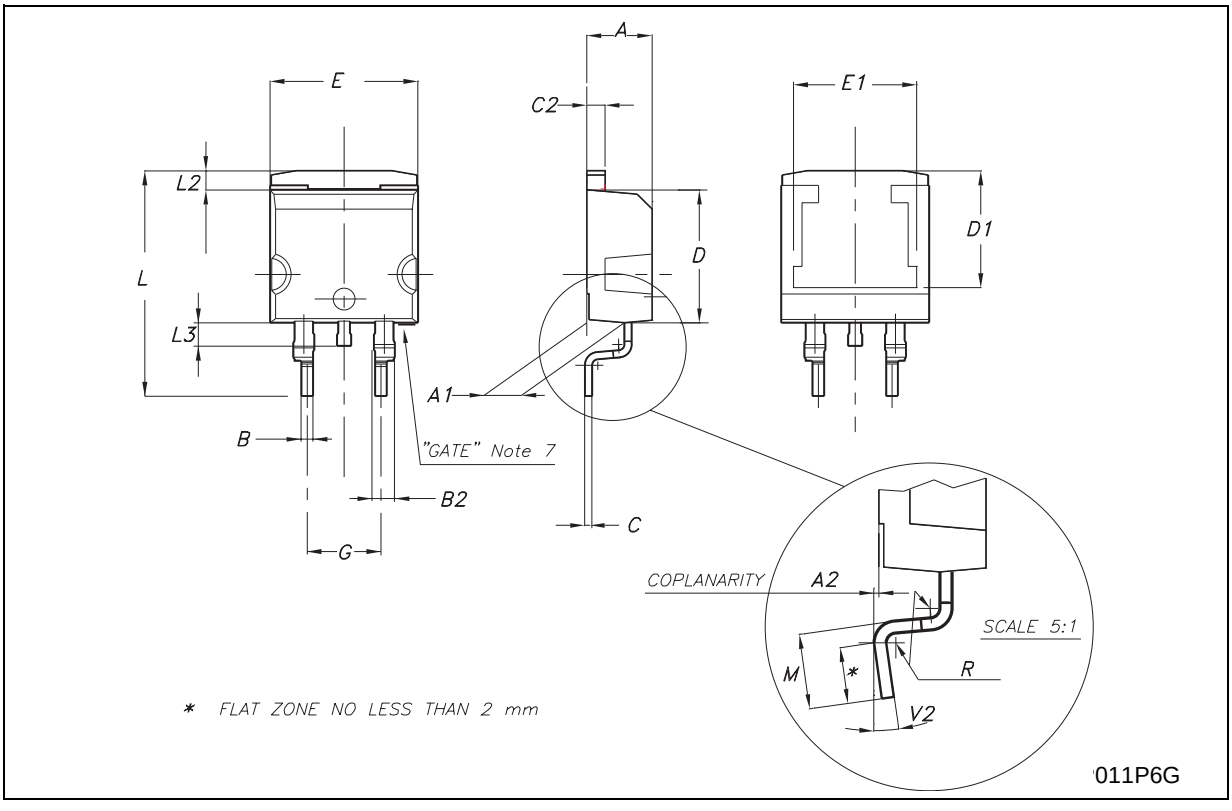

D²PAK/A MECHANICAL DATA


DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A	4.40		4.60	0.173		0.181
A1	2.49		2.69	0.098		0.106
A2	0.03		0.23	0.001		0.009
B	0.7		0.93	0.028		0.037
B1	0.8		1.3	0.031		0.051
B2	1.14		1.7	0.045		0.067
C	0.45		0.60	0.018		0.024
C2	1.23		1.36	0.048		0.054
D	8.95		9.35	0.352		0.368
D1		8			0.315	
E	10		10.4	0.394		0.409
E1		8.5			0.335	
G	4.88		5.28	0.192		0.208
L	15		15.85	0.591		0.624
L2	1.27		1.4	0.050		0.055
M	2.4		3.2	0.094		0.126
R		0.4			0.016	
V2	0°		8°	0°		8°

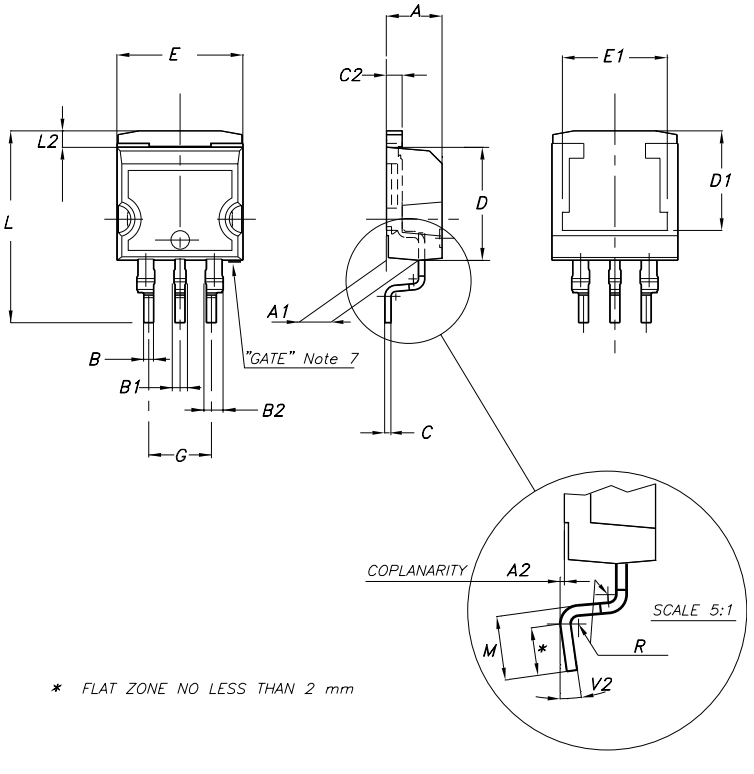

7106164/D

Tape & Reel D²PAK-P²PAK-D²PAK/A-P²PAK/A MECHANICAL DATA

DIM.	mm.			inch		
	MIN.	TYP	MAX.	MIN.	TYP.	MAX.
A			180			7.086
C	12.8	13.0	13.2	0.504	0.512	0.519
D	20.2			0.795		
N	60			2.362		
T			14.4			0.567
Ao	10.50	10.6	10.70	0.413	0.417	0.421
Bo	15.70	15.80	15.90	0.618	0.622	0.626
Ko	4.80	4.90	5.00	0.189	0.193	0.197
Po	3.9	4.0	4.1	0.153	0.157	0.161
P	11.9	12.0	12.1	0.468	0.472	0.476

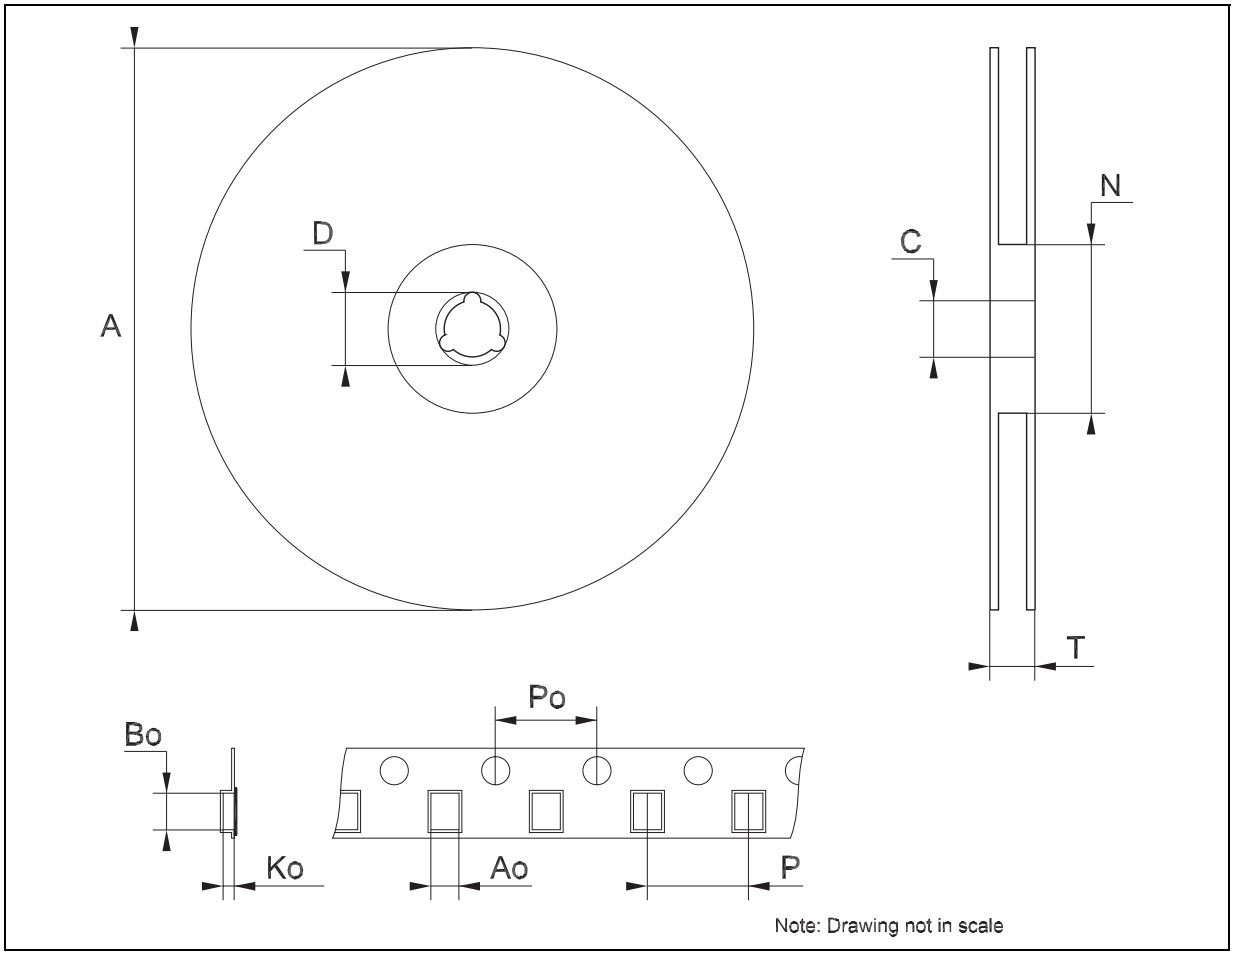

Note: Drawing not in scale

Table 8: Revision History

Date	Revision	Description of Changes
04-Feb-2005	6	Add new package D^2PAK/A.

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

All other names are the property of their respective owners

© 2005 STMicroelectronics - All Rights Reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com