
EVEREADY BATTERY CO. 1-800-383-7323 / USA
www.energizer.com 1-800-383-7323 / CANADA
+ 44 (0) 208 920 2306 / EUROPE


ENERGIZER NO. L91



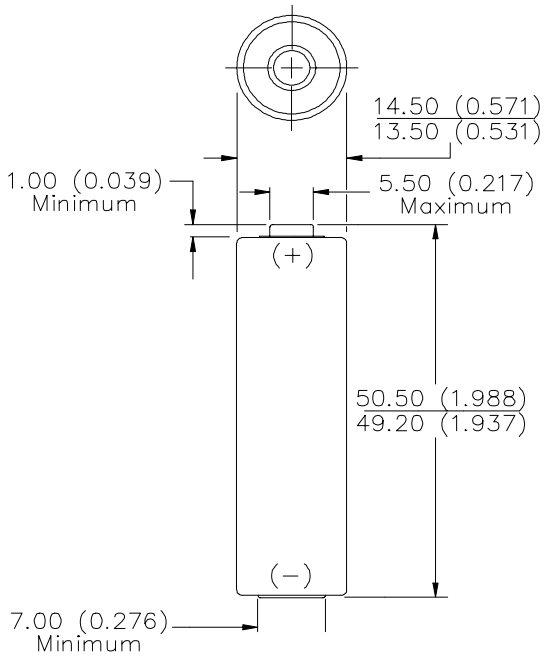


Chemical System:	Lithium Lithium/Iron Disulfide (Li/FeS_2)
Designation:	ANSI-15LF, IEC-FR6
Battery Voltage:	1.5 Volts
Average Weight:	14.5 grams (0.5 oz.)
Volume:	8.0 cubic centimeters (0.5 cubic inch)
Storage Temp:	-40ºC to 60ºC (-40ºF to 140ºF)
Operating Temp:	-40ºC to 60ºC (-40ºF to 140ºF)
Average Capacity:	3000 mAh (to 1.0 volts) (Rated capacity at 200 mA drain.)
Max Discharge:	2 Amps Continuous 3 Amps Pulse (2 seconds max)
Lithium Content:	Less than 1 gram (0.04 oz.) per cell
Jacket:	Non-magnetic Plastic Label
Transportation:	Meets requirments of 49CFR 173.185 (b)


CONSTANT CURRENT DISCHARGE
Typical Service

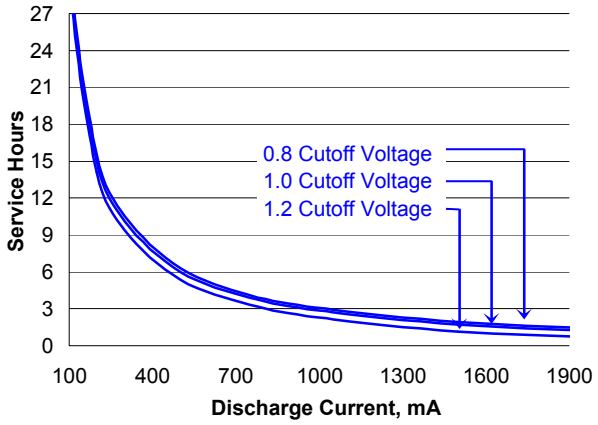

CONSTANT POWER DISCHARGE
Continuous @ 20ºC to 0.9 volts

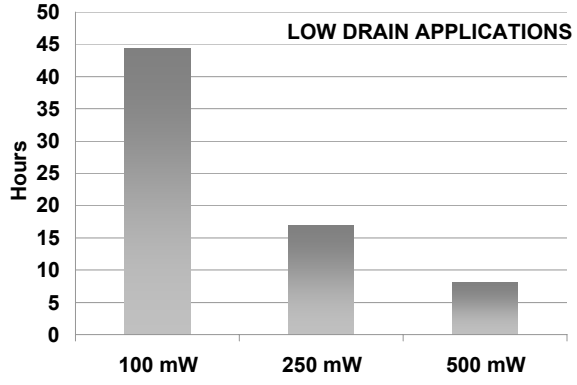



CONSTANT POWER DISCHARGE
Continuous @ 20ºC to 1.0 volts

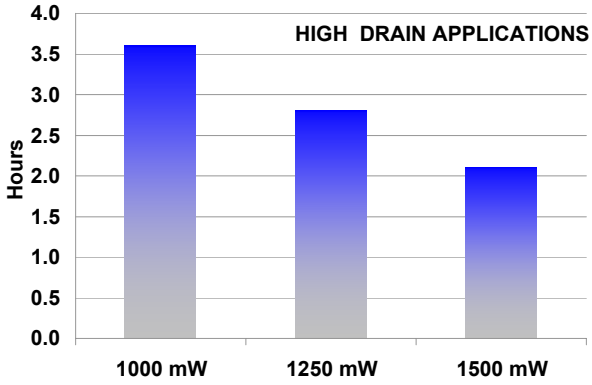


ENERGIZER NO. L91


Temperature Effects

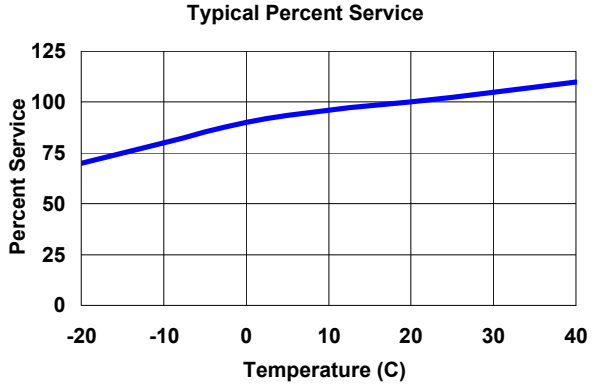


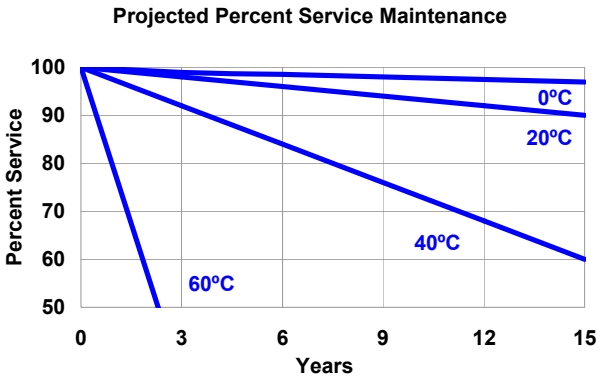



Industry Standard Tests @ 20º C

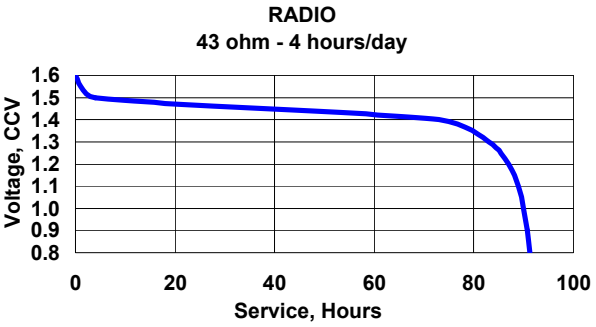


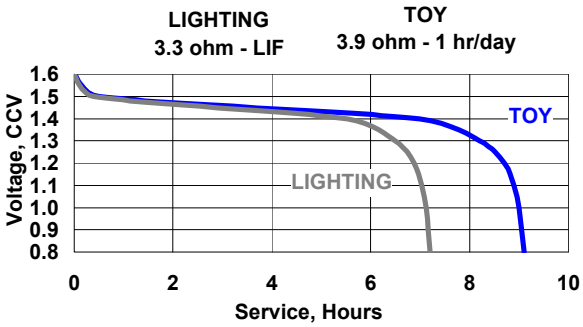

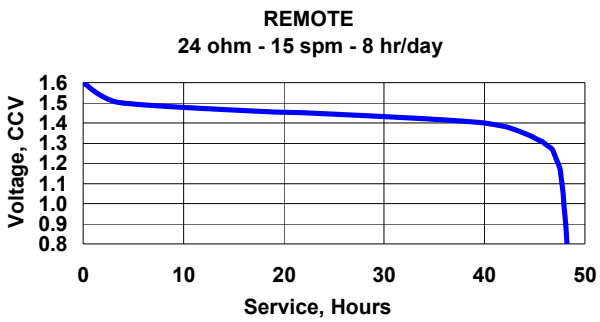

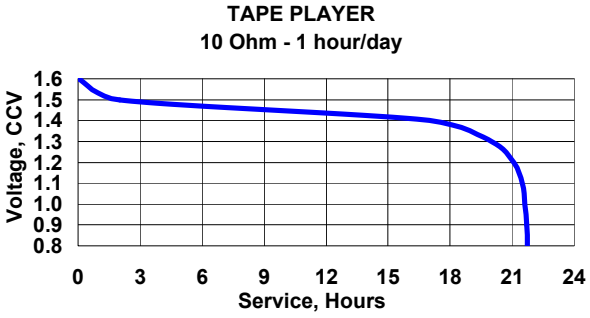

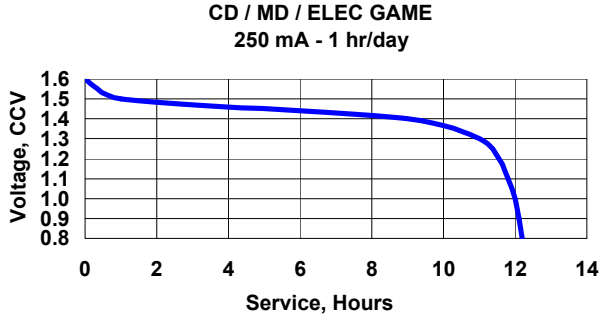

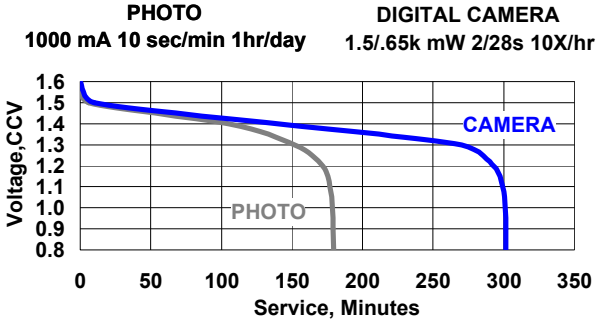

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

© Energizer - All Rights Reserved