


Model:LB221-25-06L

Characteristics:

It is used for switching power supply,suppressing common mode interference signal.

Technical index:


- Installation method: PCB
- Flame resistance: UL94-V0
- Operating temperature: -20℃~+100℃
- Storage temperature: -40℃~+100℃
- Frequency range: DC~400Hz
- Dielectric strength: 2.5KV/1min（between two coils）

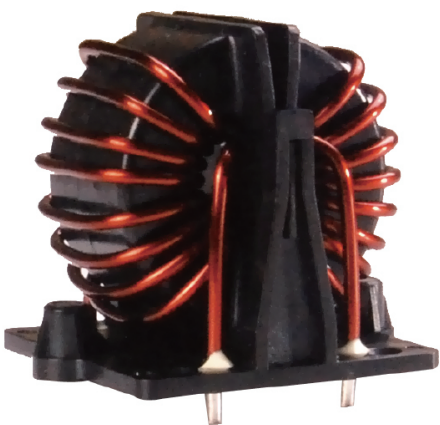


Electrical parameters:

Rated current	25	A
Inductance 1KHz,0.3V	0.64	mH
Inductance error	-30~+50	%
DC resistance	2.6	mΩ
Maximum operating voltage	600V AC 1000V DC	
Weight	26	g


Schematic wiring diagram:

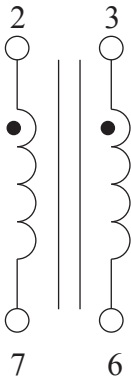

Dimensions(in mm):

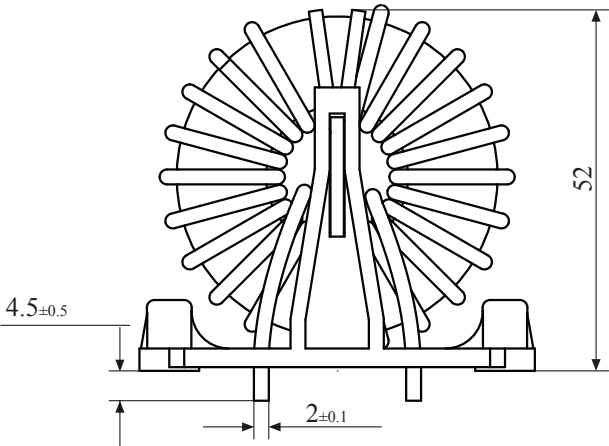

Front View

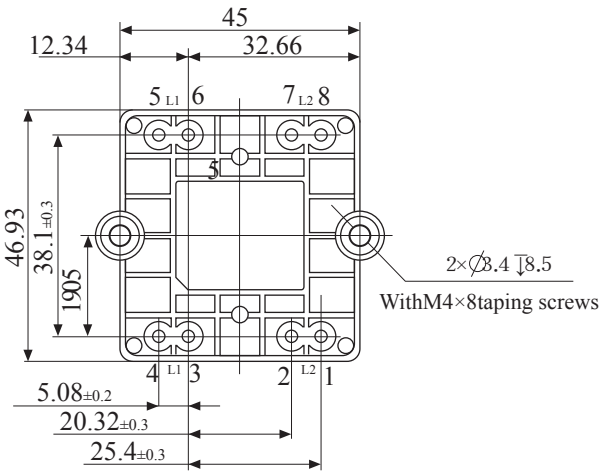

Bottom View