
LOW DROP FIXED AND ADJUSTABLE POSITIVE VOLTAGE REGULATORS



SOT-223

■ DESCRIPTION

The UTC **LD2117/A** is a low dropout, 3-terminal positive voltage regulator designed to provide output current up to 800mA/1A, There are adjustable versions (V_{REF}=1.25V) and various fixed versions.

■ FEATURES

* Low dropout voltage
* Suitable for SCSI-2 active termination if V_{OUT} set to 2.85V
* Output current up to 0.8A for 2117 and 1.0A for 2117A
* Built-in current limit and over temperature protection
* Available in ±1%(at 25°C) and 2% in all temperature range
* Ultra low current consumption (0.35mA typ.)
* Ultra low Adjustment Current (7μA typ.)
* Ultra low minimum Load (0.3mA typ.)
* Stable with low ESR ceramic output capacitor (MLCC)

■ ORDERING INFORMATION

Ordering Number		Package	② Pin Assignment	Packing
Lead Free	Halogen Free			
LD2117①L-xx-AA3-②-R	LD2117①G-xx-AA3-②-R	SOT-223	A: AOI B: OAI C: AIO D: IAO	Tape Reel

Note: Pin Assignment: I: V_{IN} O: V_{OUT} A: ADJ


LD2117①L-xx-AA3-②-R

(1)Packing Type
(2)Pin Assignment
(3)Package Type
(4)Output Voltage Code
(5)Lead Free
(6)Current Code


(1) R: Tape Reel
(2) refer to Pin Assignment
(3) AA3: SOT-223
(4) xx: refer to Marking Information
(5) G: Halogen Free, L: Lead Free
(6) Blank: 800mA, A: 1A

Copyright © 2012 Unisonic Technologies Co., Ltd

■ MARKING INFORMATION

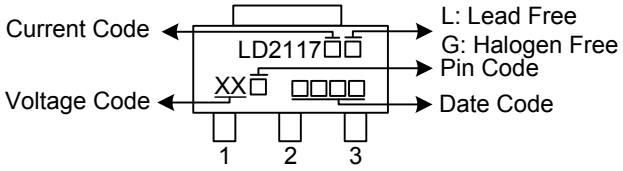PACKAGE	VOLTAGE CODE	MARKING
SOT-223	12 :1.2V 15 :1.5V 18 :1.8V 30 :3.0V 33 :3.3V 36 :3.6V 50 :5.0V AD :ADJ	

■ BLOCK DIAGRAM

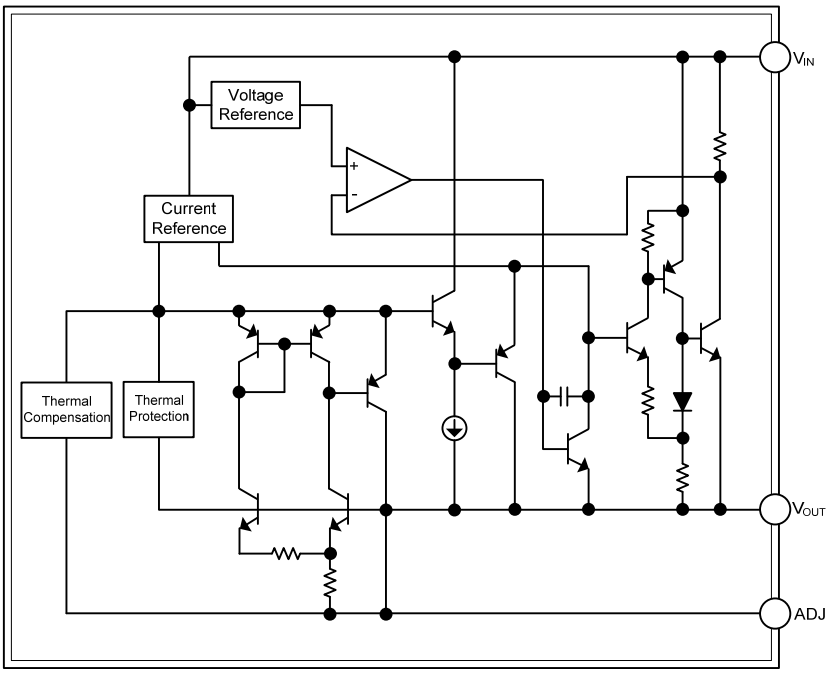

■ ABSOLUTE MAXIMUM RATING (T_A=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
DC Input Voltage	V_{IN}	18	V
Power Dissipation	P_D	Internally limited	W
Junction Temperature	T_J	+150	°C
Storage temperature	T_{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V_{IN}	15	V
Operating Junction Temperature	T_J	0 ~ +125	°C

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	165	°C/W
Junction to Case	θ_{JC}	15	°C/W

■ ELECTRICAL CHARACTERISTICS

(T_A=25°C, refer to the test circuits, T_J=0 ~ 125°C, C_O=10μF unless otherwise specified)

For LD2117/A-1.2

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	V_{IN}=3.2V, I_{OUT}=10mA, T_J=25°C		1.188	1.200	1.212	V
Output Voltage	V_{OUT}	V_{IN}=2.7 ~ 8V LD2117 : I_{OUT}=10~800mA LD2117A : I_{OUT}=10~1000mA		1.188	1.200	1.212	V
Line Regulation	ΔV_{OUT}	V_{IN}=2.7 ~ 8V, I_{OUT}=10mA			1	6	mV
Load Regulation	ΔV_{OUT}	V_{IN}=2.7V LD2117 : I_{OUT}=10~800mA LD2117A : I_{OUT}=10~1000mA			1	10	mV
Temperature stability	ΔV_{OUT}				0.5		%
Long Term Stability	ΔV_{OUT}	1000 hrs, T_J=125°C			0.3		%
Operating Input Voltage	V_{IN}	I_{OUT}=100mA				15	V
Quiescent Current	I_Q	$V_{IN}\leq$10V			0.35	0.5	mA
Current Limit	I_{LIMIT}	V_{IN}=6.2V, T_J=25°C	LD2117	800			mA
			LD2117A	1000			
Output Noise Voltage	e_N	B=10Hz ~ 10KHz, T_J=25°C			100		μV
Supply Voltage Rejection	SVR	I_{OUT}=40mA, f=120Hz, T_J=25°C, V_{IN}=4.2V, V_{RIPPLE}=1V_{PP}		75			dB
Dropout Voltage	V_D	I_{OUT}=100mA			1.05	1.15	V
		I_{OUT}=500mA			1.15	1.25	
		I_{OUT}=800mA			1.18	1.28	
		I_{OUT}=1A			1.22	1.35	
Thermal Regulation		T_A=25°C, 30ms Pulse			0.01	0.10	%/W
Thermal Shutdown	OTP				150		°C

■ ELECTRICAL CHARACTERISTICS(Cont.)

For LD2117/A-1.5

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	V_{IN}=3.5V, I_{OUT}=10mA, T_J=25°C		1.485	1.500	1.515	V
Output Voltage	V_{OUT}	V_{IN}=3 ~ 8V LD2117 : I_{OUT}=0~800mA LD2117A : I_{OUT}=0~1000mA		1.485	1.500	1.515	V
Line Regulation	ΔV_{OUT}	V_{IN}=3 ~ 8V, I_{OUT}=0mA			1	6	mV
Load Regulation	ΔV_{OUT}	V_{IN}=3V LD2117 : I_{OUT}=0~800mA LD2117A : I_{OUT}=0~1000mA			1	10	mV
Temperature stability	ΔV_{OUT}				0.5		%
Long Term Stability	ΔV_{OUT}	1000 hrs, T_J=125°C			0.3		%
Operating Input Voltage	V_{IN}	I_{OUT}=100mA				15	V
Quiescent Current	I_Q	V_{IN}≤10V			0.35	0.5	mA
Current Limit	I_{LIMIT}	V_{IN}=6.5V, T_J=25°C	LD2117	800			mA
			LD2117A	1000			
Output Noise Voltage	e_N	B=10Hz ~ 10KHz, T_J=25°C			100		μV
Supply Voltage Rejection	SVR	I_{OUT}=40mA, f=120Hz, T_J=25°C, V_{IN}=4.5V, V_{RIPPLE}=1V_{PP}		75			dB
Dropout Voltage	V_D	I_{OUT}=100mA			1.05	1.15	V
		I_{OUT}=500mA			1.15	1.25	
		I_{OUT}=800mA			1.18	1.28	
		I_{OUT}=1A			1.22	1.35	
Thermal Regulation		T_A=25°C, 30ms Pulse			0.01	0.10	%/W
Thermal Shutdown	OTP				150		°C

For LD2117/A-1.8

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Output Voltage	V_{OUT}	V_{IN}=3.8V, I_{OUT}=10mA, T_J=25°C		1.782	1.800	1.818	V
Output Voltage	V_{OUT}	V_{IN}=3.3 ~ 8V LD2117 : I_{OUT}=0~800mA LD2117A : I_{OUT}=0~1000mA		1.782	1.800	1.818	V
Line Regulation	ΔV_{OUT}	V_{IN}=3.3 ~ 8V, I_{OUT}=0mA			1	6	mV
Load Regulation	ΔV_{OUT}	V_{IN}=3.3V LD2117 : I_{OUT}=0~800mA LD2117A : I_{OUT}=0~1000mA			1	10	mV
Temperature stability	ΔV_{OUT}				0.5		%
Long Term Stability	ΔV_{OUT}	1000 hrs, T_J=125°C			0.3		%
Operating Input Voltage	V_{IN}	I_{OUT}=100mA				15	V
Quiescent Current	I_Q	V_{IN}≤10V			0.35	0.5	mA
Current Limit	I_{LIMIT}	V_{IN}=6.8V, T_J=25°C	LD2117	800			mA
			LD2117A	1000			
Output Noise Voltage	e_N	B=10Hz ~ 10KHz, T_J=25°C			100		μV
Supply Voltage Rejection	SVR	I_{OUT}=40mA, f=120Hz, T_J=25°C, V_{IN}=5.5V, V_{RIPPLE}=1V_{PP}		75			dB
Dropout Voltage	V_D	I_{OUT}=100mA			1.05	1.15	V
		I_{OUT}=500mA			1.15	1.25	
		I_{OUT}=800mA			1.18	1.28	
		I_{OUT}=1A			1.22	1.35	
Thermal Regulation		T_A=25°C, 30ms Pulse			0.01	0.10	%/W
Thermal Shutdown	OTP				150		°C

■ ELECTRICAL CHARACTERISTICS(Cont.)

For LD2117/A-3.0

PARAMETER	SYMBOL	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
Output Voltage	V_{OUT}	V_{IN}=5V, I_{OUT}=10mA, T_J=25°C		2.970	3.000	3.030	V
Output Voltage	V_{OUT}	V_{IN}=4.5 ~ 10V LD2117 : I_{OUT}=0~800mA LD2117A : I_{OUT}=0~1000mA		2.970	3.000	3.030	V
Line Regulation	ΔV_{OUT}	V_{IN}=4.5 ~ 12V, I_{OUT}=0mA			1	6	mV
Load Regulation	ΔV_{OUT}	V_{IN}=4.5V LD2117 : I_{OUT}=0~800mA LD2117A : I_{OUT}=0~1000mA			1	10	mV
Temperature stability	ΔV_{OUT}				0.5		%
Long Term Stability	ΔV_{OUT}	1000 hrs, T_J=125°C			0.3		%
Operating Input Voltage	V_{IN}	I_{OUT}=100mA				15	V
Quiescent Current	I_Q	$V_{IN}\leq$15V			0.35	0.5	mA
Current Limit	I_{LIMIT}	V_{IN}=8V, T_J=25°C	LD2117	800			mA
			LD2117A	1000			
Output Noise Voltage	e_N	B=10Hz ~ 10KHz, T_J=25°C			100		μV
Supply Voltage Rejection	SVR	I_{OUT}=40mA, f=120Hz, T_J=25°C, V_{IN}=6V, V_{RIPPLE}=1V_{PP}		75			dB
Dropout Voltage	V_D	I_{OUT}=100mA			1.05	1.15	V
		I_{OUT}=500mA			1.15	1.25	
		I_{OUT}=800mA			1.18	1.28	
		I_{OUT}=1A			1.22	1.35	
Thermal Regulation		T_A=25°C, 30ms Pulse			0.01	0.10	%/W
Thermal Shutdown	OTP				150		°C

For LD2117/A-3.3

PARAMETER	SYMBOL	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
Output Voltage	V_{OUT}	V_{IN}=5.3V, I_{OUT}=10mA, T_J=25°C		3.267	3.300	3.333	V
Output Voltage	V_{OUT}	V_{IN}=4.75 ~ 10V LD2117 : I_{OUT}=0~800mA LD2117A : I_{OUT}=0~1000mA		3.267	3.300	3.333	V
Line Regulation	ΔV_{OUT}	V_{IN}=4.75 ~ 15V, I_{OUT}=0mA			1	6	mV
Load Regulation	ΔV_{OUT}	V_{IN}=4.75V LD2117 : I_{OUT}=0~800mA LD2117A : I_{OUT}=0~1000mA			1	10	mV
Temperature stability	ΔV_{OUT}				0.5		%
Long Term Stability	ΔV_{OUT}	1000 hrs, T_J=125°C			0.3		%
Operating Input Voltage	V_{IN}	I_{OUT}=100mA				15	V
Quiescent Current	I_Q	$V_{IN}\leq$15V			0.35	0.5	mA
Current Limit	I_{LIMIT}	V_{IN}=8.3V, T_J=25°C	LD2117	800			mA
			LD2117A	1000			
Output Noise Voltage	e_N	B=10Hz ~ 10KHz, T_J=25°C			100		μV
Supply Voltage Rejection	SVR	I_{OUT}=40mA, f=120Hz, T_J=25°C, V_{IN}=6.3V, V_{RIPPLE}=1V_{PP}		75			dB
Dropout Voltage	V_D	I_{OUT}=100mA			1.05	1.15	V
		I_{OUT}=500mA			1.15	1.25	
		I_{OUT}=800mA			1.18	1.28	
		I_{OUT}=1A			1.22	1.35	
Thermal Regulation		T_A=25°C, 30ms Pulse			0.01	0.10	%/W
Thermal Shutdown	OTP				150		°C

■ ELECTRICAL CHARACTERISTICS(Cont.)

For LD2117/A-3.6

PARAMETER	SYMBOL	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
Output Voltage	V_{OUT}	V_{IN}=5.6V, I_{OUT}=10mA, T_J=25°C		3.564	3.600	3.636	V
Output Voltage	V_{OUT}	V_{IN}=5 ~ 10V LD2117 : I_{OUT}=0~800mA LD2117A : I_{OUT}=0~1000mA		3.564	3.600	3.636	V
Line Regulation	ΔV_{OUT}	V_{IN}=5 ~ 15V, I_{OUT}=0mA			1	6	mV
Load Regulation	ΔV_{OUT}	V_{IN}=5V LD2117 : I_{OUT}=0~800mA LD2117A : I_{OUT}=0~1000mA			1	10	mV
Temperature stability	ΔV_{OUT}				0.5		%
Long Term Stability	ΔV_{OUT}	1000 hrs, T_J=125°C			0.3		%
Operating Input Voltage	V_{IN}	I_{OUT}=100mA				15	V
Quiescent Current	I_Q	V_{IN}≤15V			0.35	0.5	mA
Current Limit	I_{LIMIT}	V_{IN}=8.6V, T_J=25°C	LD2117	800			mA
			LD2117A	1000			
Output Noise Voltage	e_N	B=10Hz to 10KHz, T_J=25°C			100		μV
Supply Voltage Rejection	SVR	I_{OUT}=40mA, f=120Hz, T_J=25°C, V_{IN}=6.6V, V_{RIPPLE}=1V_{PP}		75			dB
Dropout Voltage	V_D	I_{OUT}=100mA			1.05	1.15	V
		I_{OUT}=500mA			1.15	1.25	
		I_{OUT}=800mA			1.18	1.28	
		I_{OUT}=1A			1.22	1.35	
Thermal Regulation		T_A=25°C, 30ms Pulse			0.01	0.10	%/W
Thermal Shutdown	OTP				150		°C

For LD2117/A-5.0

PARAMETER	SYMBOL	TEST CONDITIONS		MIN.	TYP.	MAX.	UNIT
Output Voltage	V_{OUT}	V_{IN}=7V, I_{OUT}=10mA, T_J=25°C		4.950	5.000	5.050	V
Output Voltage	V_{OUT}	V_{IN}=6.5 ~ 15V LD2117 : I_{OUT}=0~800mA LD2117A : I_{OUT}=0~1.0A		4.950	5.000	5.050	V
Line Regulation	ΔV_{OUT}	V_{IN}=6.5 ~ 15V, I_{OUT}=0mA			1	6	mV
Load Regulation	ΔV_{OUT}	V_{IN}=6.5V LD2117 : I_{OUT}=0~800mA LD2117A : I_{OUT}=0~1000mA			1	15	mV
Temperature stability	ΔV_{OUT}				0.5		%
Long Term Stability	ΔV_{OUT}	1000 hrs, T_J=125°C			0.3		%
Operating Input Voltage	V_{IN}	I_{OUT}=100mA				15	V
Quiescent Current	I_Q	V_{IN}≤15V			0.35	0.5	mA
Current Limit	I_{LIMIT}	V_{IN}=10V, T_J=25°C	LD2117	800			mA
			LD2117A	1000			
Output Noise Voltage	e_N	B=10Hz to 10KHz, T_J=25°C			100		μV
Supply Voltage Rejection	SVR	I_{OUT}=40mA, f=120Hz, T_J=25°C, V_{IN}=8V, V_{RIPPLE}=1V_{PP}		75			dB
Dropout Voltage	V_D	I_{OUT}=100mA			1.05	1.15	V
		I_{OUT}=500mA			1.15	1.25	
		I_{OUT}=800mA			1.18	1.28	
		I_{OUT}=1A			1.22	1.35	
Thermal Regulation		T_A=25°C, 30ms Pulse			0.01	0.10	%/W
Thermal Shutdown	OTP				150		°C

■ ELECTRICAL CHARACTERISTICS(Cont.)

For LD2117/A-ADJ

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Reference Voltage	V_{REF}	V_{IN}-V_{OUT}=2V, I_{OUT}=10mA, T_J=25°C		1.125	1.25	1.375	V
Reference Voltage	V_{REF}	V_{IN}-V_{OUT}=1.4~10V LD2117A : I_{OUT}=10~1000mA		1.125	1.25	1.375	V
Line Regulation	ΔV_{OUT}	V_{IN}-V_{OUT}=1.5 ~ 13.75V, I_{OUT}=10mA			0.035	0.2	%
Load Regulation	ΔV_{OUT}	V_{IN}-V_{OUT}=3V LD2117 : I_{OUT}=10~800mA LD2117A : I_{OUT}=10~1000mA			0.1	0.4	%
Temperature stability	ΔV_{OUT}				0.50		%
Long Term Stability	ΔV_{OUT}	1000 hrs, T_J=125°C			0.3		%
Operating Input Voltage	V_{IN}					15	V
Adjustment Pin Current	I_{ADJ}	V_{IN}≤15V			7	10	μA
Adjustment Pin Current Change	ΔI_{ADJ}	V_{IN}-V_{OUT}=1.4~10V, LD2117A : I_{OUT}=10 ~ 1000mA			0.3	2	μA
Minimum Load Current	$I_{O(MIN)}$	V_{IN}=15V			0.3	1	mA
Current Limit	I_{LIMIT}	V_{IN}-V_{OUT}=5V, T_J=25°C	LD2117	800			mA
			LD2117A	1000			
Output Noise (%V_O)	e_N	B=10Hz ~ 10KHz, T_J=25°C			0.003		%
Supply Voltage Rejection	SVR	I_{OUT}=40mA, f=120Hz, T_J=25°C, V_{IN}-V_{OUT}=3V, V_{RIPPLE}=1V_{PP}		75			dB
Dropout Voltage	V_D	I_{OUT}=100mA			1.05	1.15	V
		I_{OUT}=500mA			1.15	1.25	
		I_{OUT}=800mA			1.18	1.28	
		I_{OUT}=1A			1.22	1.35	
Thermal Regulation		T_A=25°C, 30ms Pulse			0.01	0.10	%/W
Thermal Shutdown	OTP				150		°C

■ APPLICATION NOTE of LD2117/A ADJUSTABLE

The **LD2117/A** adjustable has a reference voltage of between the OUT and ADJ pins. I_{ADJ} is 7μA typ. (10μA max.) and ΔI_{ADJ} is 0.3μA typ. (2μA max.).

R_1 is normally fixed to 1.2kΩ.

From figure 4 we obtain:

$V_{OUT}=V_{REF}+R_2(I_{ADJ}+I_{R1})=V_{REF} + R_2(I_{ADJ}+V_{REF}/R_1)=V_{REF}(1+R_2/R_1) + R_2 \times I_{ADJ}$.

Usually R_2 value is in the range of few KΩ, so the R_2 X I_{ADJ} product could be neglected; then the above expression becomes: $V_{OUT}=V_{REF}(1+R_2/R_1)$

For better load regulation, realize a good Kelvin connection of R_1 and R_2 is important. Particularly R_1 connection must be realized very close to OUT and ADJ pin, while R_2 ground connection must be placed as near as possible to the negative Load pin. Ripple rejection can be improved by introducing a 10μF electrolytic capacitor placed in parallel to the R_2 resistor (See Fig. 5)

The UTC **LD2117/A** also supports MLCC. See Fig.6 for adjustable output and Fig.7 for fixed Output

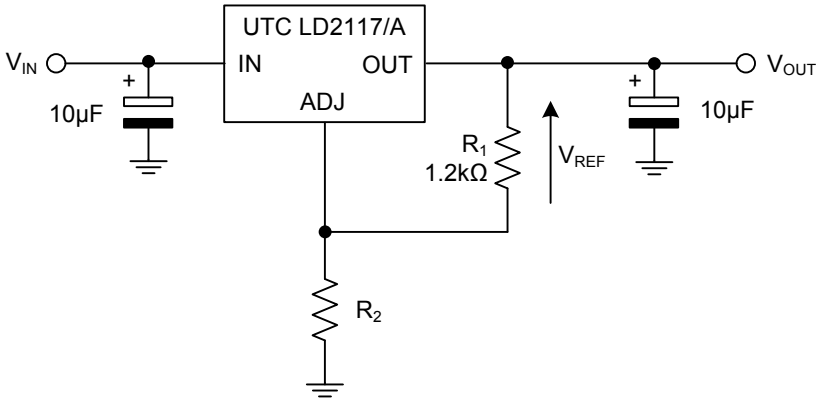


Fig.4 Adjustable Output Voltage Application Circuit

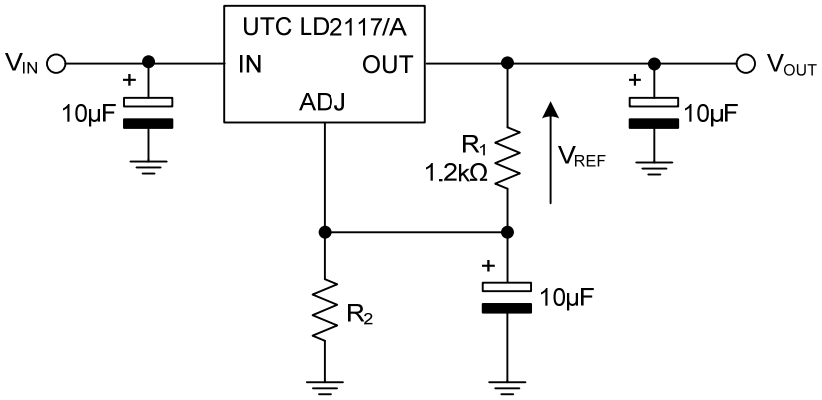


Fig.5 Adjustable Output Voltage Application with improved Ripple Rejection.

■ APPLICATION NOTE of LD2117/A ADJUSTABLE(Cont.)

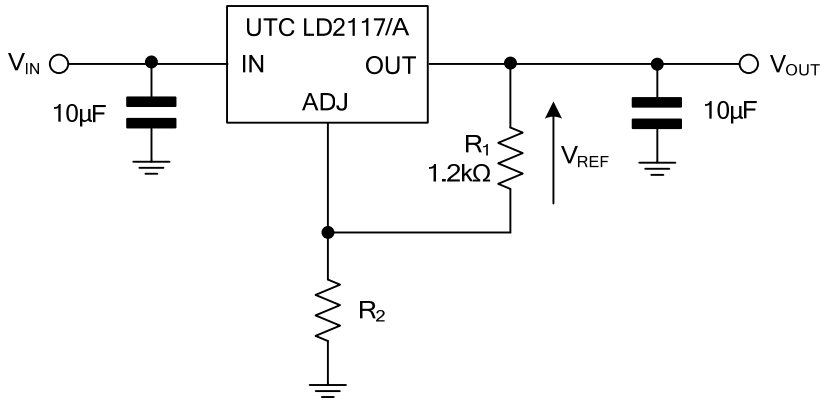


Fig.6 Adjustable Output Voltage Application Circuit for MLCC


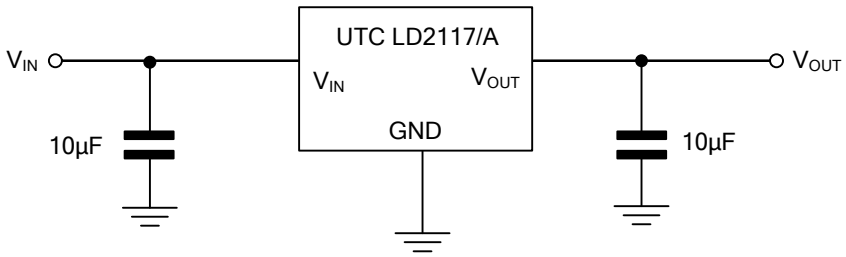



Fig.7 Fixed Output Voltage Application Circuit for MLCC

■ TYPICAL CHARACTERISTICS


Load Transient Response

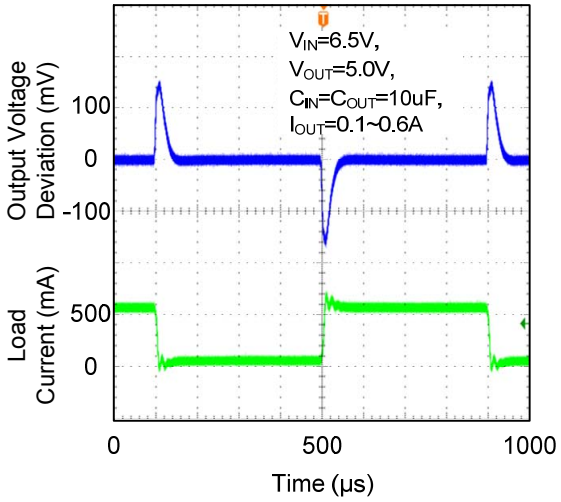


Line Transient Response

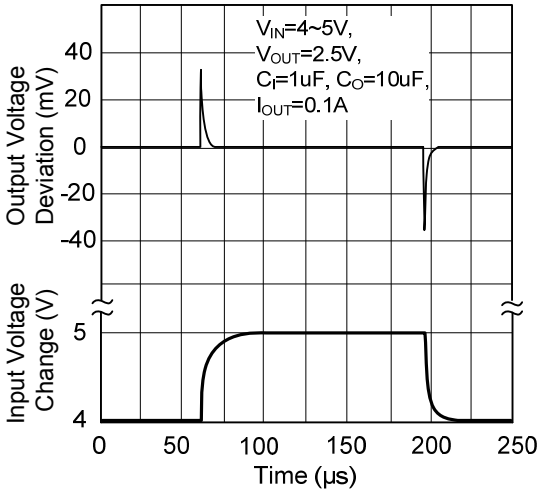


Dropout Voltage (V_{IN}-V_{OUT})

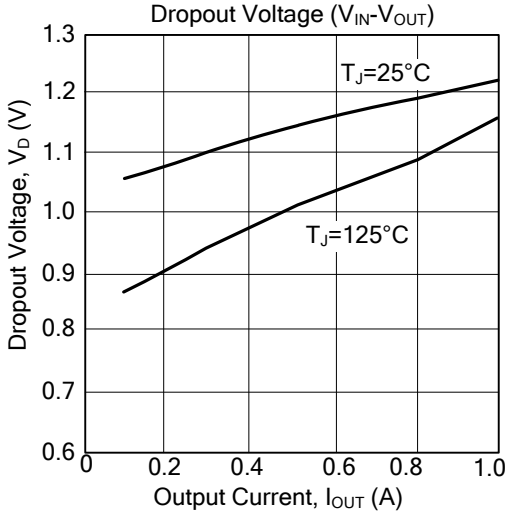


Ripple Rejection

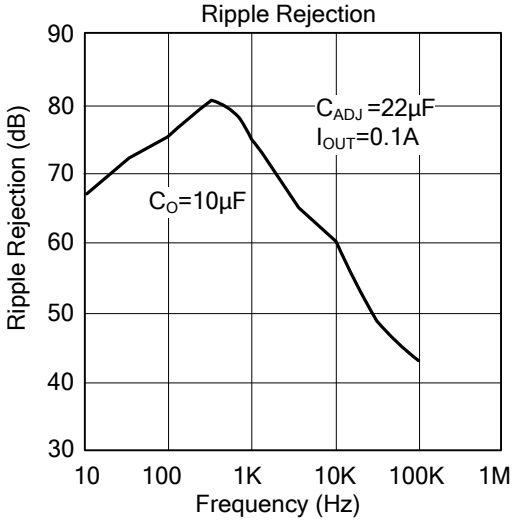

Adjust Pin Current

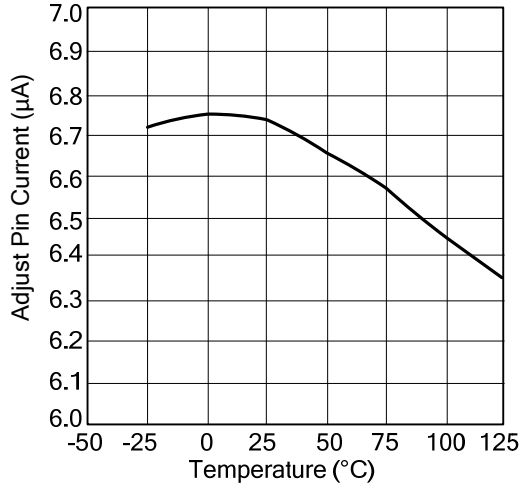


Short-Circuit Current

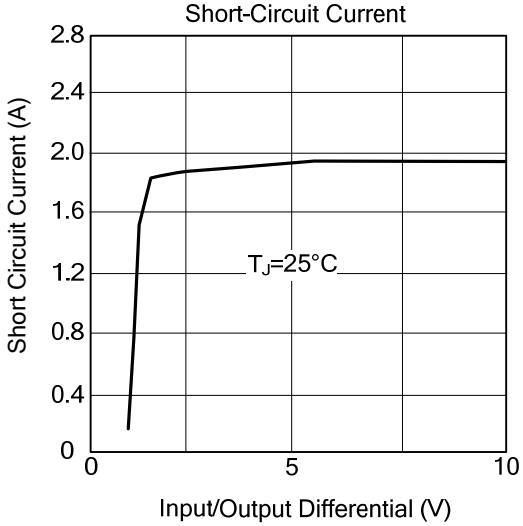


■ TYPICAL CHARACTERISTICS(Cont.)


Load Regulation

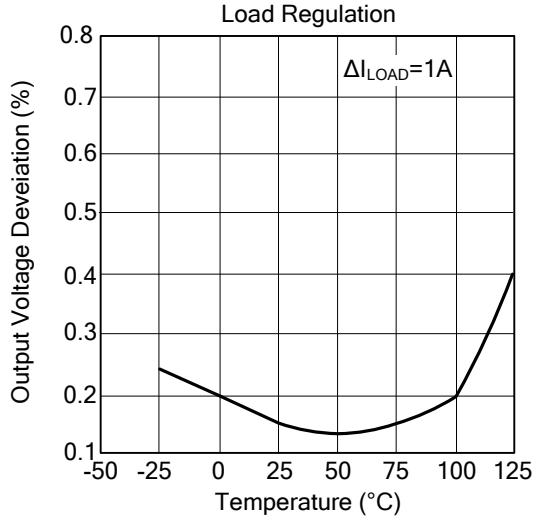


Input Current vs. Temperature

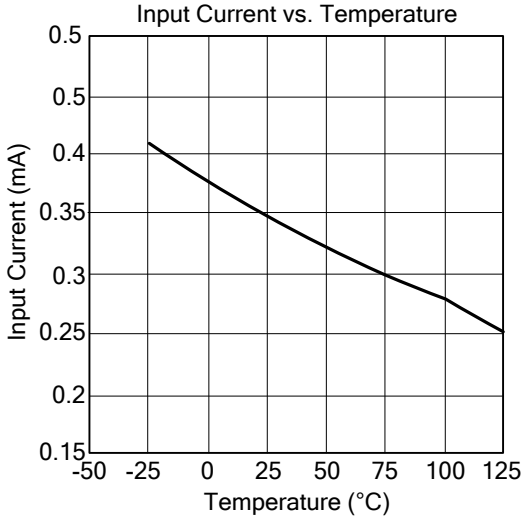


Output Voltage vs. Temperautre

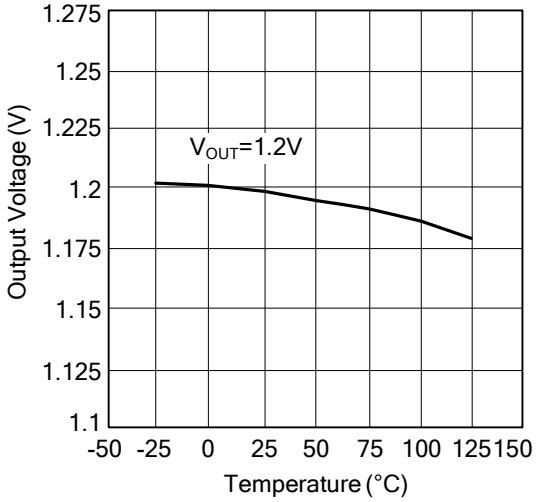


Output Voltage vs. Temperautre

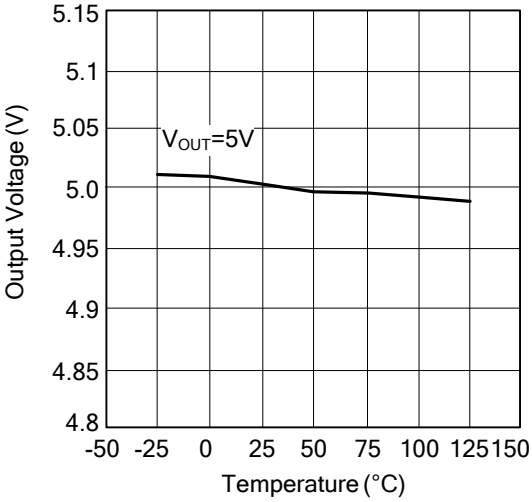

Reference Voltage vs. Temperature

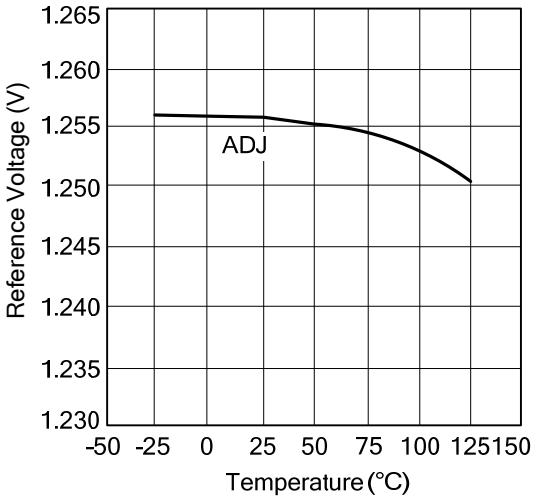

Maximum Power Dissipation

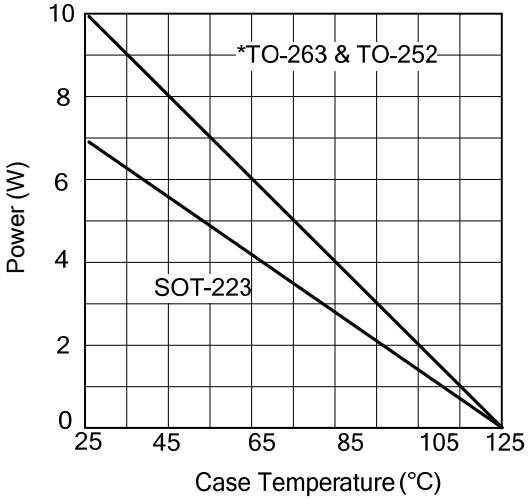

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.