


LOW PASS FILTERS

Designer's Kit K2-LFCN+

MINI-CIRCUITS DESIGNER'S KITS
SPEED UP
THE SOLUTION!

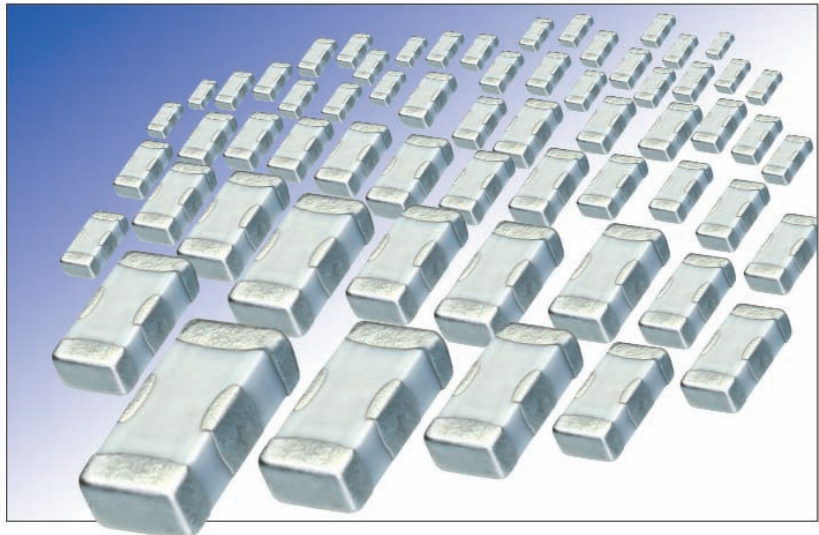

Passband DC to 6700MHz

LFCN+ Features

- Wideband, 50Ω
- LTCC Low Temperature Co-fired Ceramic
- Small size (L)0.12" x (W)0.06"
- Temperature stable
- Repeatable performance
- Excellent power handling
- Hermetically sealed
- Low cost



All models are
RoHS compliant

\$119⁹⁵
only *ea. kit (12 models, 5 of each, 60 total)*

Kit K2-LFCN+ Electrical specifications of each model

Model	Passband (MHz)	fco, (MHz) Nom.	Stopband (MHz) (loss, dB)			VSWR (:1)		Power Input* (W) Max.	No. of Sections
			(loss < 1dB) [†] Max.	(loss 3dB) Typ.	f 20 Min.	30 Typ.	fr 20 Typ.	Stopband Typ.	Passband Typ.
LFCN-800+	DC-800	990			1400	1500-2000	4500	20	1.2
• LFCN-900+	DC-850	1075			1275	1350-4850	5100	20	1.2
• LFCN-1000+	DC-1000	1300			1550	1900-5000	5500	20	1.3
• LFCN-1200+	DC-1200	1530			1865	2000-5000	6200	20	1.2
• LFCN-1325+	DC-1325	1560			2100	2200-2600	4250	20	1.4
• LFCN-1700+	DC-1700	2050			2375	2500-6500	7000	20	1.2
• LFCN-2000+	DC-2000	2275			3000	3100-3500	4600	20	1.3
• LFCN-2250+	DC-2200	2575			2900	3000-5000	7200	20	1.2
• LFCN-2400+	DC-2400	2800			3600	3700-4000	5000	20	1.2
• LFCN-5000+	DC-5000	5580			6850	7050-10000	18000	20	1.2
• LFCN-6000+	DC-6000	6800			8500	8700-10500	18000	20	1.3
• LFCN-6700+	DC-6700	7600			9300	9500-11000	18000	20	1.3

• Protected under U.S. Patent 6,943,646

[†] LFCN-1700+, -2250+, -6000+, -6700+ Loss < 1.2dB, LFCN-800+, -900+, -1325+ Loss < 1.3dB, LFCN-2000+, -2400+ Loss < 1.5dB.

* Passband rating, at 100°C ambient derate linearly to 3.5W, 3W for LFCN-5000+, -6000+, -6700+, 4W for LFCN-800+, -1325+, -2000+, -2400+.

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For quick access to product information see MINI-CIRCUITS CATALOG & WEB SITE

RF/IF MICROWAVE COMPONENTS

REV. OR
M99507
K2-LFCN+