
LED SMD

Lead-Free Parts

LG-110G/HRF-CT**DATA SHEET**DOC. NO : QW0905-LG-110G/HRF-CTREV. : ADATE : 19 - Apr - 2007



Features:

1. Package in 8.0mm carrier tape on 7" diameter reel.
2. Compatible with automatic placement equipment.
3. Compatible with reflow solder process.

Descriptions:

1. The LG-110G/HRF SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
2. Besides, lightweight makes them ideal for miniature applications. etc.

Applications:


1. Automotive : backlighting in dashboard and switch.
2. Telecommunication : indicator and backlighting in telephone and fax.
3. Flat backlight for LCD, switch and symbol
4. General use.

Device Selection Guide:

PART NO	MATERIAL	COLOR	
		Emitted	Lens
LG-110G/HRF-CT	GaP	Green	Water Clear
	AlGaInP	Red	




Package Dimensions

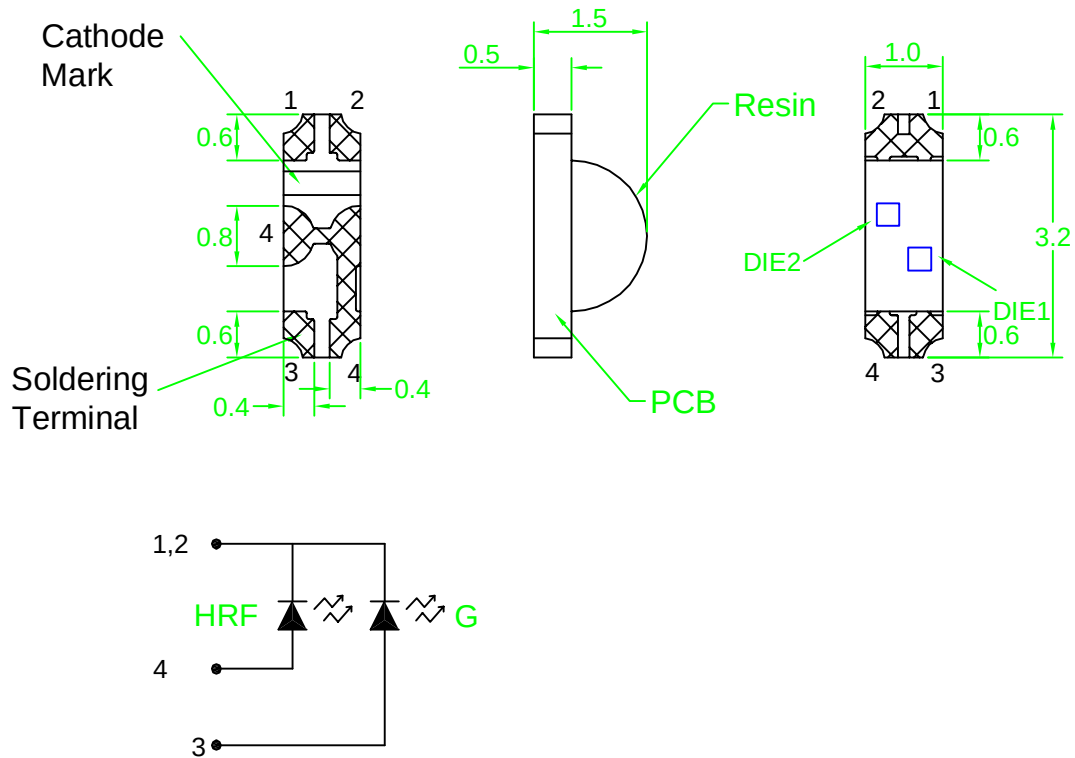

Note : 1.All dimension are in millimeter tolerance is $\pm 0.1\text{mm}$ unless otherwise noted.
2.Specifications are subject to change without notice.

Recommended Soldering Pad Dimensions

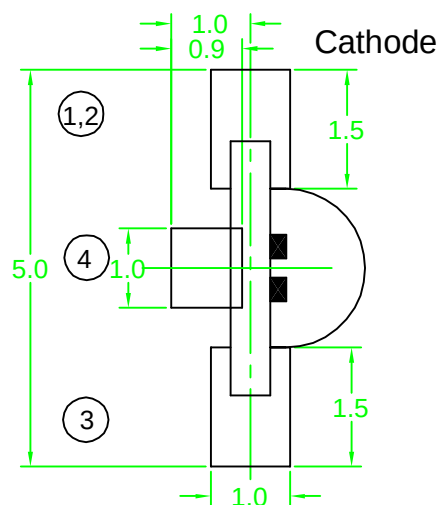

Note : The tolerances unless mentioned is $\pm 0.1\text{mm}$, Angle ± 0.5 . Unit=mm.



Absolute Maximum Ratings at Ta=25 °C

Parameter	Symbol	Ratings		UNIT
		G	HRF	
Power Dissipation	PD	65	72	mW
Peak Forward Current Duty 1/10@10KHz	IFP	120	90	mA
Forward Current	IF	25	30	mA
Reverse Current @5V	Ir	10		μA
Electrostatic Discharge	ESD	----	2000	V
Operating Temperature	Topr	-40 ~ +85		°C
Storage Temperature	Tstg	-40 ~ +90		°C
Soldering Temperature	Tsol	Max 260°C for 5 sec Max		

Typical Electrical & Optical Characteristics (Ta=25 °C)

Items	Symbol		Min.	Typ.	Max.	UNIT	CONDITION
Luminous Intensity	Iv	G	3.2	10	----	mcd	IF=20mA
		HRF	32	70	----		
Peak Wavelength	λP	G	----	565	----	nm	IF=20mA
		HRF	----	642	----		
Dominant Wavelength	λD	G	----	573	----	nm	IF=20mA
		HRF	----	630	----		
Spectral Line Half-Width	Δλ	G	----	30	----	nm	IF=20mA
		HRF	----	20	----		
Forward Voltage	VF	G	1.7	----	2.6	V	IF=20mA
		HRF	1.5	----	2.4		
Viewing Angle	2θ 1/2	G	----	120	----	deg	IF=20mA
		HRF	----	120	----		

Note : 1. The forward voltage data did not including ±0.1V testing tolerance.

2. The luminous intensity data did not including ±15% testing tolerance.



Typical Electro-Optical Characteristics Curve

G CHIP

Fig.1 Forward current vs. Forward Voltage

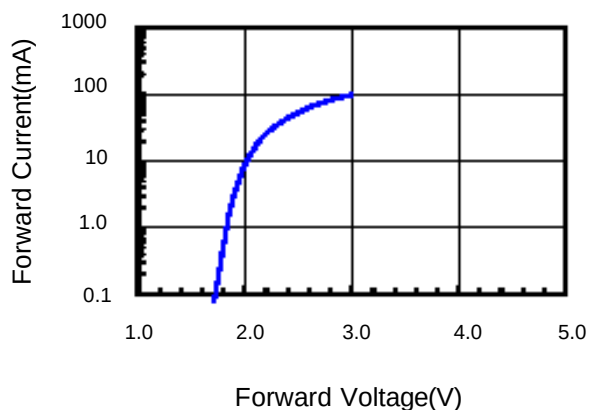


Fig.2 Relative Intensity vs. Forward Current

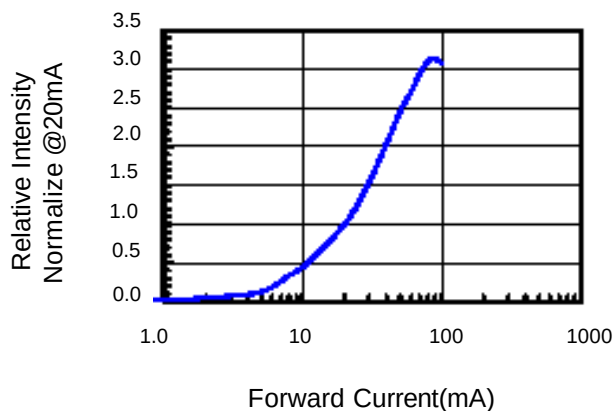


Fig.3 Forward Voltage vs. Temperature

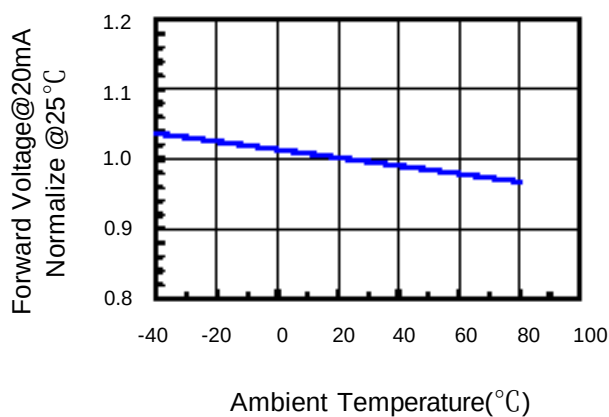


Fig.4 Relative Intensity vs. Temperature

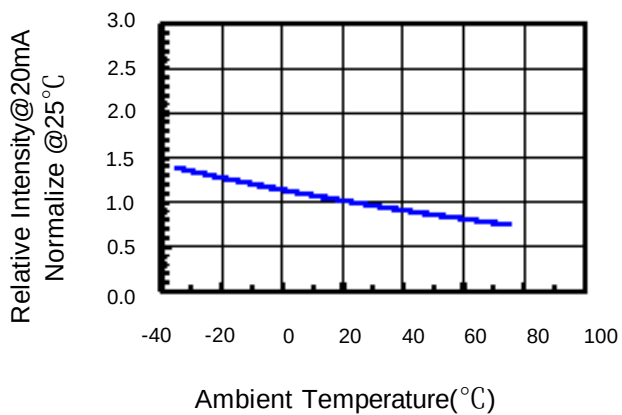


Fig.5 Relative Intensity vs. Wavelength


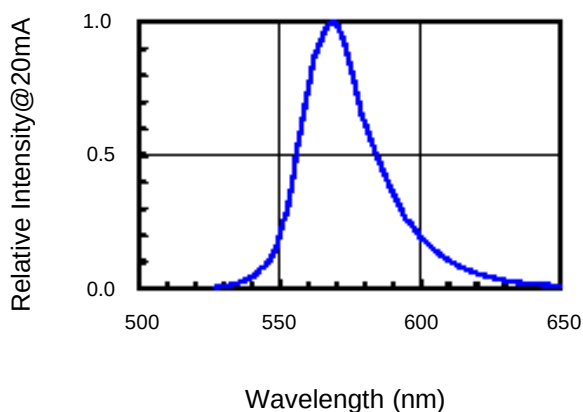


Fig.6 Directive Radiation



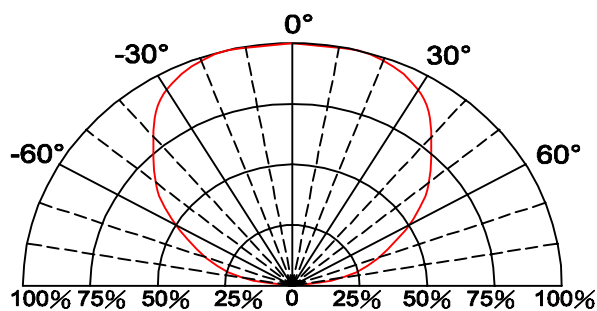

Typical Electro-Optical Characteristics Curve

HRF CHIP

Fig.1 Forward current vs. Forward Voltage

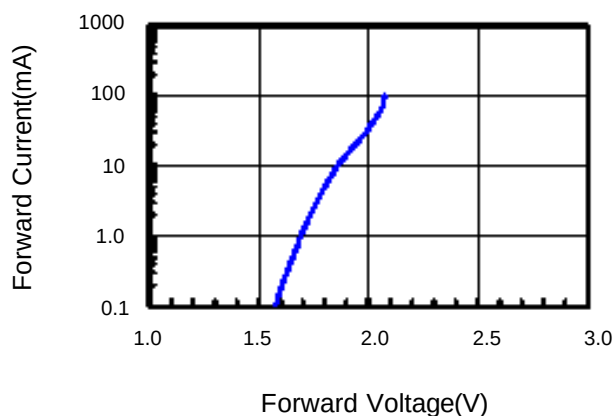


Fig.2 Relative Intensity vs. Forward Current

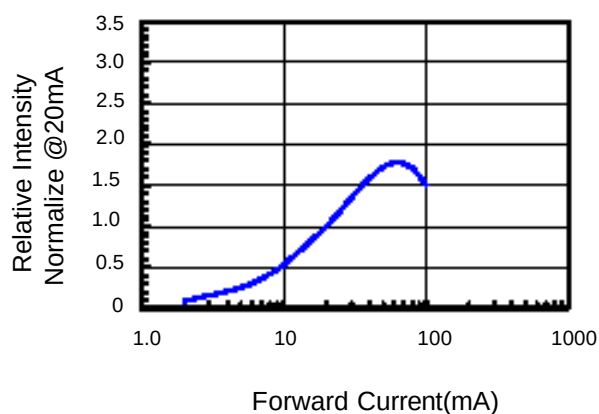


Fig.3 Forward Voltage vs. Temperature

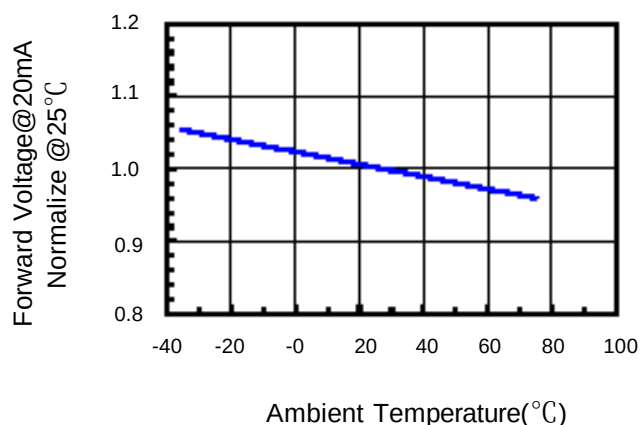


Fig.4 Relative Intensity vs. Temperature

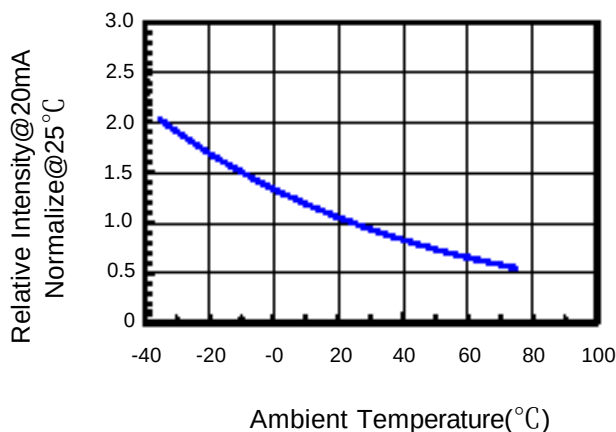


Fig.5 Relative Intensity vs. Wavelength


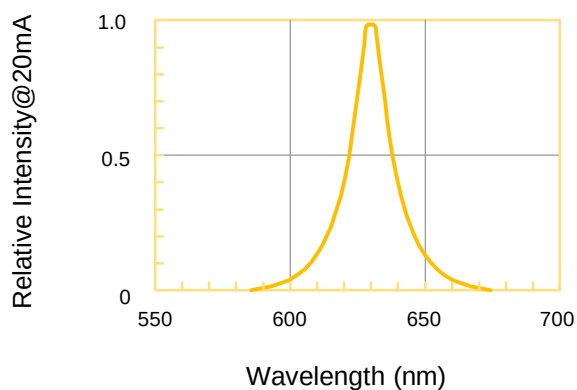


Fig.6 Directive Radiation



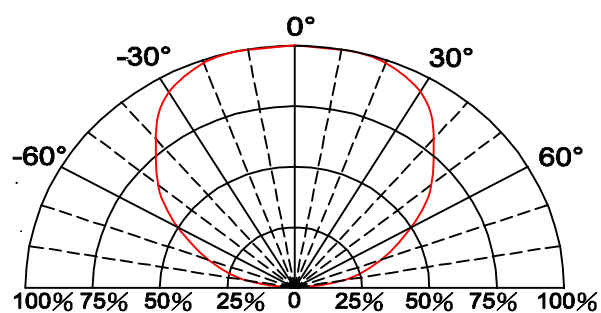


LIGITEK

LIGITEK ELECTRONICS CO.,LTD.
Property of Ligitek Only

PART NO. LG-110G/HRF-CT


Page 6/11

Carrier Tape Dimensions

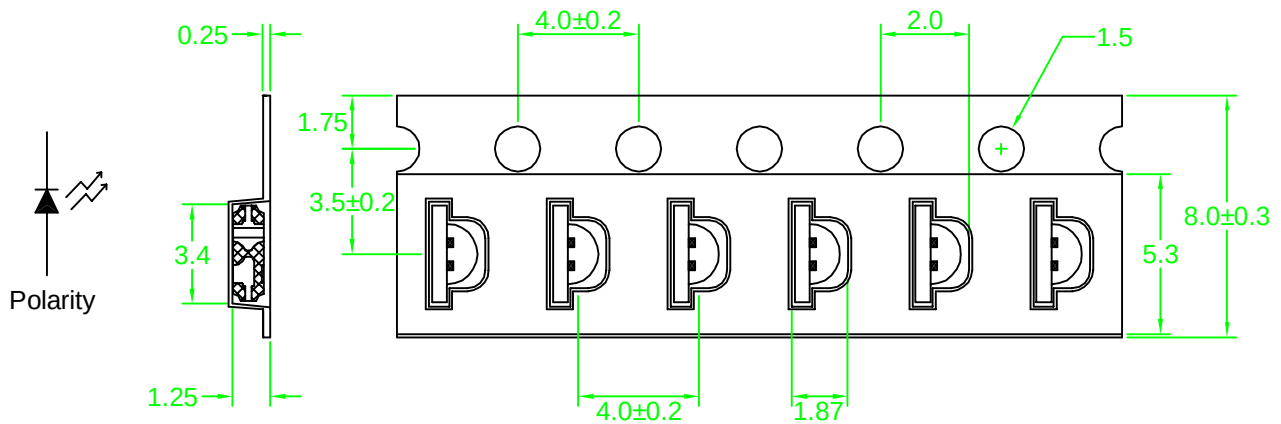

Note : The tolerances unless mentioned is $\pm 0.1\text{mm}$, Angle $\pm 0.5^\circ$. Unit=mm.

· Packing Specifications

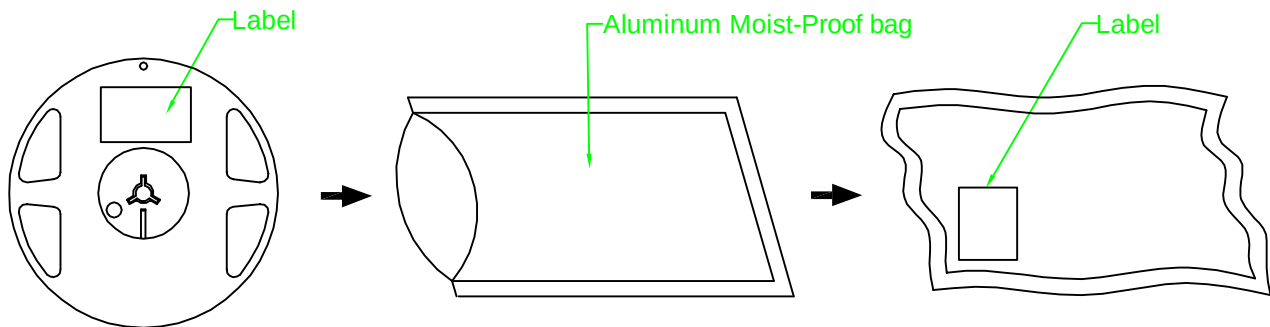

Part No.	Description	Quantity/Reel
LG-110G/HRF-CT	8.0mm tape, 7" reel	3000 devices

Label Explanation

		立基電子工業股份有限公司 LIGITEK ELECTRONICS CO., LTD.			
PART NO. : LG-110G/HRF-CT					
LOT NO. : MC9400418					
Q'TY(PCS) : 3000 PCS				VF:1.8 - 2.6 VF:1.6 - 2.4	
BIN/HUE : K/9-P/30					

BIN PK : Green Chip Luminous Intensity



BIN P : Red Chip Luminous Intensity

HUE 9 : Green Chip Dominant Wavelength

HUE 30 : Red Chip Dominant Wavelength

1.8 - 2.6 : Forward Voltage

Reel Dimensions

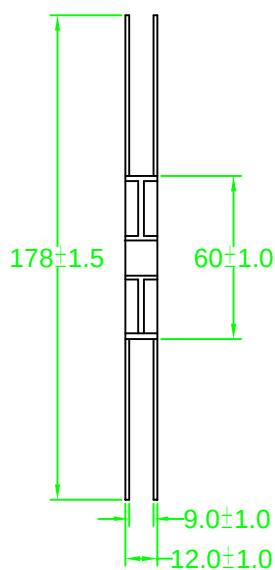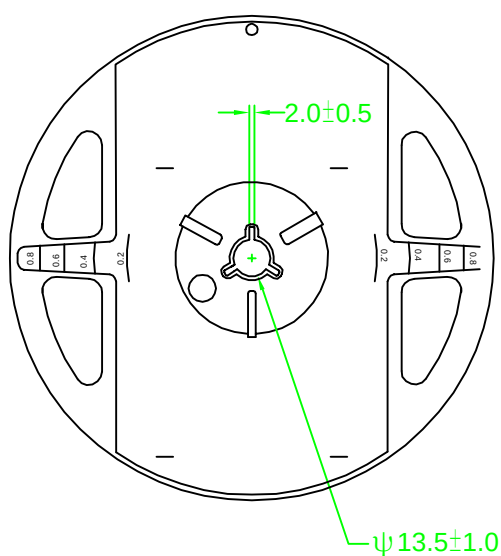



LIGITEK


LIGITEK ELECTRONICS CO.,LTD.
Property of Ligitek Only

PART NO. LG-110G/HRF-CT


Page 8/11

Box Explanation

1. 5 BAG / INNER BOX
2. INNER BOX SIZE : L X W X H 23cm X 8.5cm x 26cm



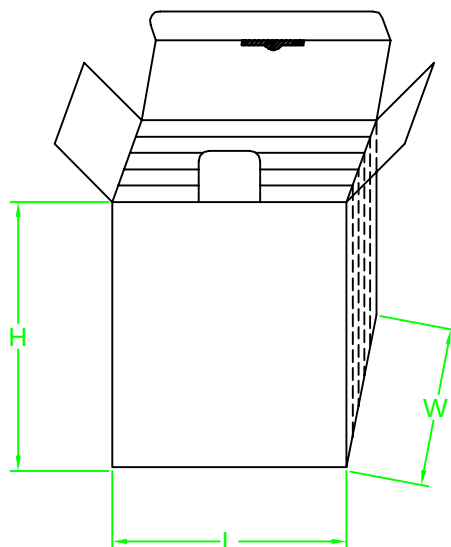


3. 10 INNER BOXES / CARTON
4. CARTON SIZE : L X W X H 49cm X 46cm x 29cm

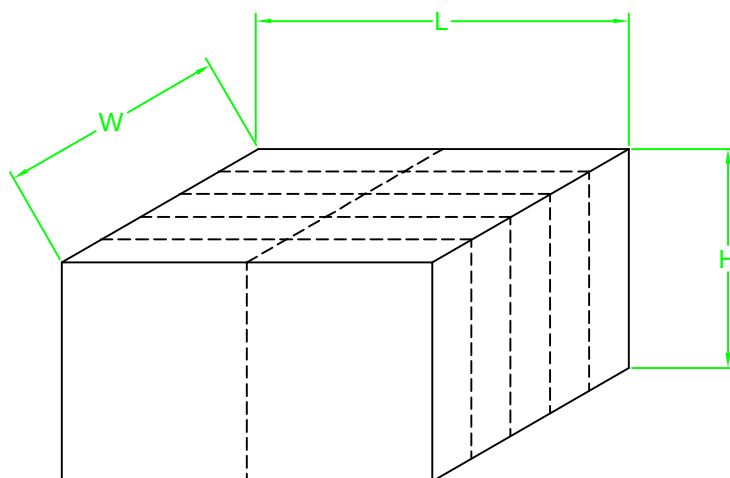

**Recommended Soldering Conditions****1. Hand Solder**

Basic spec is $\leq 280^{\circ}\text{C}$ 3 sec one time only.

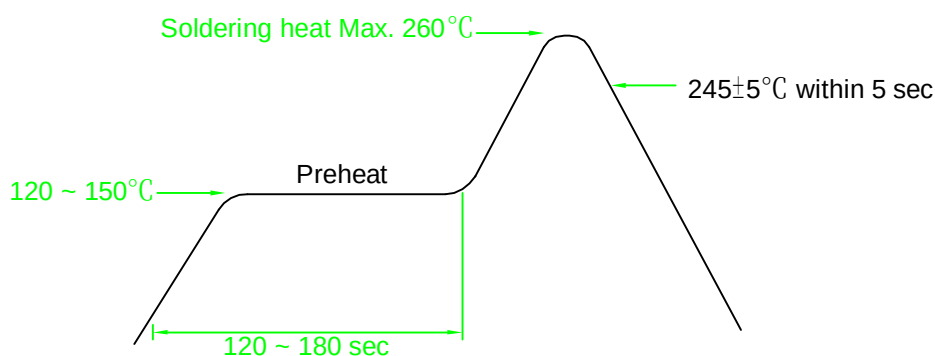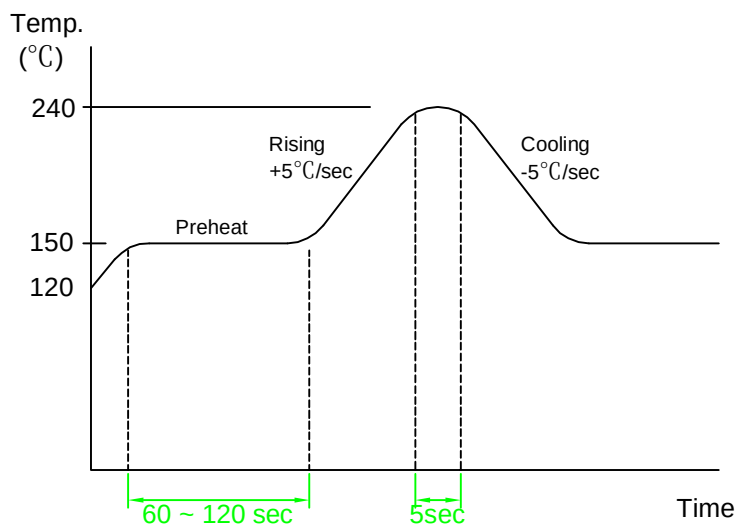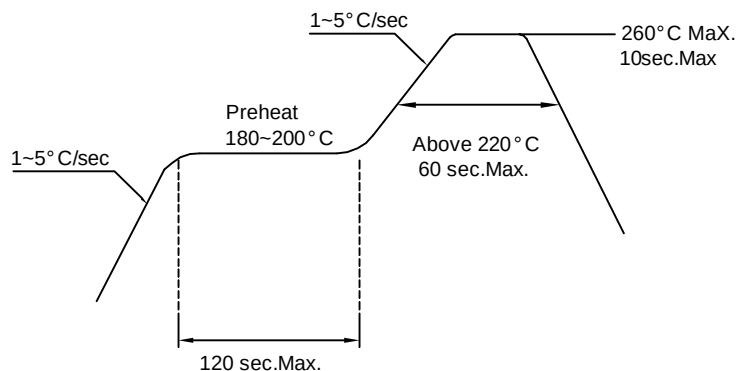2. Wave Solder**3-1. LEAD Reflow Solder****3-2 PB-Free Reflow Solder**

Reflow Soldering should not be done more than two times.

**Precautions For Use:****Storage time:**


- 1.The operation of Temperatures and RH are : $5^{\circ}\text{C}\sim 35^{\circ}\text{C}$,RH60%.
- 2.Once the package is opened, the products should be used within a week.
Otherwise, they should be kept in a damp proof box with descanting agent.
Considering the tape life, we suggest our customers to use our products within a year at $<30^{\circ}\text{C}$ and $<90\%$ relative humidity(RH). (from production date).
- 3.If opened more than one week in an atmosphere $5^{\circ}\text{C} \sim 35^{\circ}\text{C}$,RH60%, they should be treated at $60^{\circ}\text{C}\pm 5^{\circ}\text{C}$ for 15hrs.

Drive Method:


LED is a current operated device, and therefore, requires some kind of current limiting incorporated into the driver circuit. This current limiting typically takes the form of a current limiting resistor placed in series with the LED.

Consider worst case voltage variations that could occur across the current limiting resistor. The forward current should not be allowed to change by more than 40 % of its desired value.

Circuit model A



Circuit model B



(A) Recommended circuit.

(B) The difference of brightness between LED could be found due to the VF-IF characteristics of LED.

Cleaning:

Use alcohol-based cleaning solvents such as isopropyl alcohol to clean the LED.

ESD(Electrostatic Discharge):

Static Electricity or power surge will damage the LED. Use of a conductive wrist band or anti-electrostatic glove is recommended when handling these LED. All devices, equipment and machinery must be properly grounded.

**Reliability Test:**

Classification	Test Item	Test Condition	Reference Standard
Endurance Test	Operating Life Test	1.Ta=Under Room Temperature As Per Data Sheet Maximum Rating. 2.If=20mA 3.t=1000 hrs (-24hrs, +72hrs)	MIL-STD-750D: 1026 MIL-STD-883D: 1005 JIS C 7021: B-1
	High Temperature Storage Test	1.Ta=105°C±5°C 2.t=1000 hrs (-24hrs, +72hrs)	MIL-STD-883D:1008 JIS C 7021: B-10
	Low Temperature Storage Test	1.Ta=-40°C±5°C 2.t=1000 hrs (-24hrs, +72hrs)	JIS C 7021: B-12
	High Temperature High Humidity Storage Test	1.Ta=65°C±5°C 2.RH=90%~95% 3.t=1000hrs ±2hrs	MIL-STD-202F:103B JIS C 7021: B-11
Environmental Test	Thermal Shock Test	1.Ta=105°C±5°C&-40°C±5°C (10min) (10min) 2.total 10 cycles	MIL-STD-202F: 107D MIL-STD-750D: 1051 MIL-STD-883D: 1011
	Solderability Test	1.T.Sol=235°C±5°C 2.Immersion time 2 ±0.5sec 3.Coverage ≥95% of the dipped surface	MIL-STD-202F: 208D MIL-STD-750D: 2026 MIL-STD-883D: 2003 IEC 68 Part 2-20 JIS C 7021: A-2
	Temperature Cycling	1.105°C ~ 25°C ~ -55°C ~ 25°C 30mins 5mins 30mins 5mins 2.10 Cycles	MIL-STD-202F: 107D MIL-STD-750D: 1051 MIL-STD-883D: 1010 JIS C 7021: A-4
	IR Reflow	1.T=260°C Max. 10sec.Max. 2. 6 Min	MIL-STD-750D:2031.2 J-STD-020