

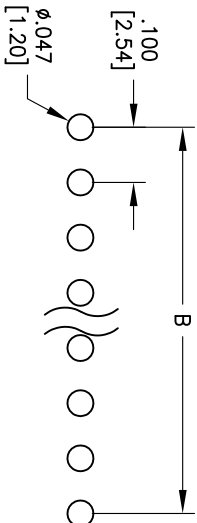
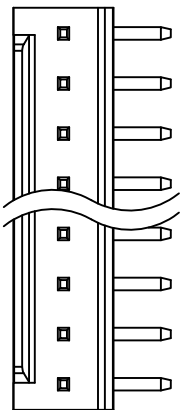



APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/27/08	
A		REVISED COLOR	11/18/09	

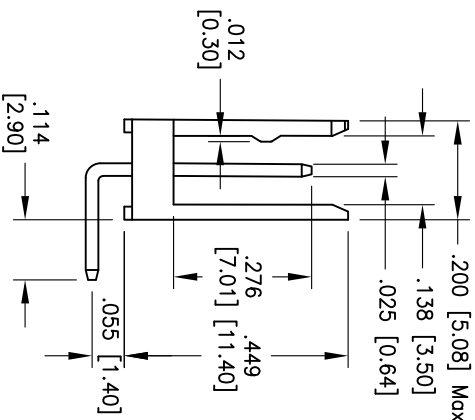

Recommended PCB Layout

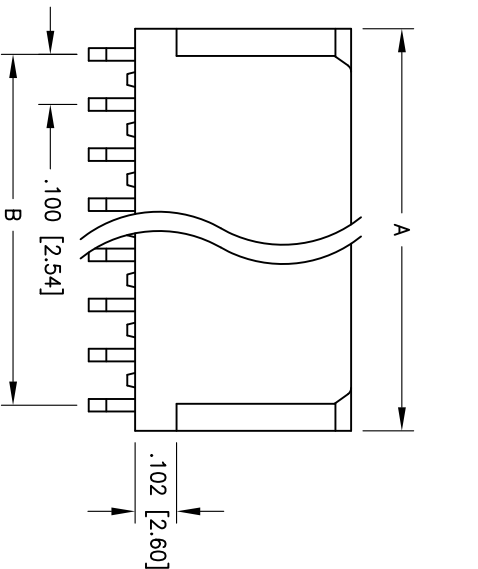

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-0

Insulator color: Black

Contacts: Copper Alloy

Plating:

Gold flash over Nickel underplate overall.

Electrical:

Operating voltage: 250 VAC max

Current rating: 3 Amps max

Contact resistance: 20 mohms max

Dielectric resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +105°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds

Positions: 2 thru 20
A = .100 [2.54] x No. of Positions
B = .100 [2.54] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

.100 [2.54] LOCKING HEADER, LONG BACK,
RIGHT ANGLE, GOLD PLATED, PCB

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 ØX ± .10 .XX ± .020 ØXX ± .015 XXX ± .015 ØXXX ± .010				ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710			
APPROVALS				TITLE			
DATE				.100 [2.54] LOCKING HEADER, LONG BACK, RIGHT ANGLE, GOLD PLATED, PCB			
DRAWN	DY			10/27/08			
CHECKED							
APPROVED							
SIZE		PART NO.					
X		LHA-D-XX-GRA-V0					
REF: 300056T		SCALE: NTS		SHEET 1 OF 1		REV: A	