
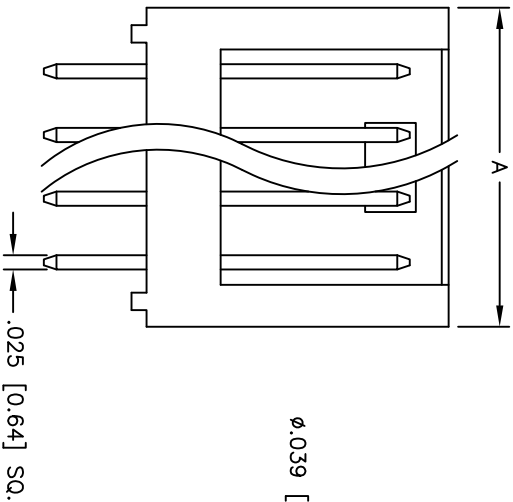
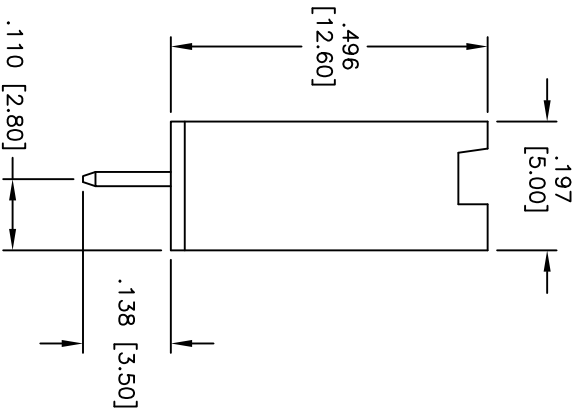


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/18/10	

APPROVED: _____

DATE: _____ TITLE: _____

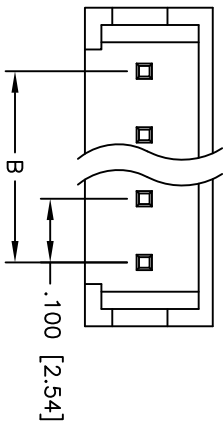

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V-0

Insulator color: Orange, Pantone color P156C

Contacts: Brass

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 250V AC,DC

Current rating: 3A AC,DC

Contact resistance: 20 mohms max

Withstanding voltage: 1,000 VAC for 1 minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds



Positions: 2 thru 12
A = .100 [2.54] x No. of Spaces +.200 [5.08]
B = .100 [2.54] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.100 [2.54] LOCKING HEADER, STRAIGHT, PCB

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]				TOLERANCES: EXCEPT AS NOTED			
INCHES				HOLES			
.X	± .10	Ø.X	± .10	.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010	APPROVALS			
DRAWN			DY	5/18/10			
CHECKED							
APPROVED							
SIZE				PART NO.			
X				LHAB-XX-TS-V0			
REF: S00723T				SCALE: NTS			
				SHEET 1 OF 1			