

Rev	AWO #	Description	Date	Appr
-		RELEASED	4/12/05	


APPROVED: _____


DATE: _____ TITLE: _____

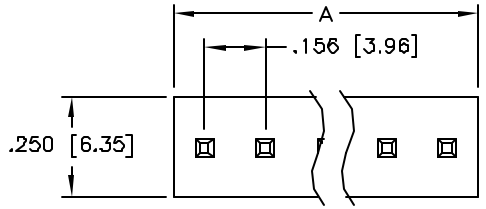

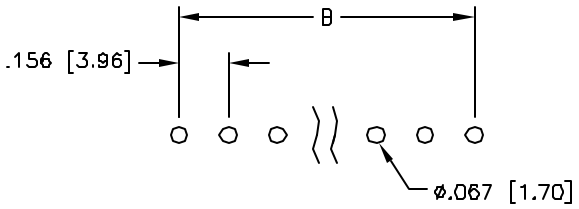

PCB LAYOUT

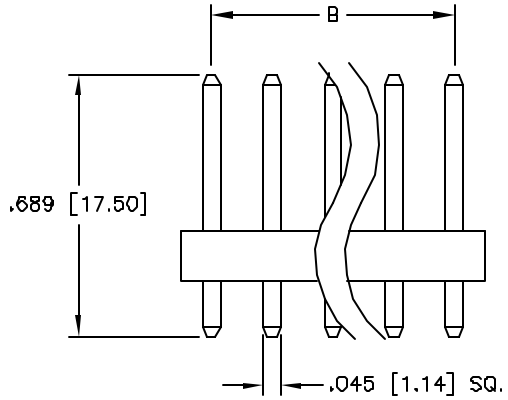

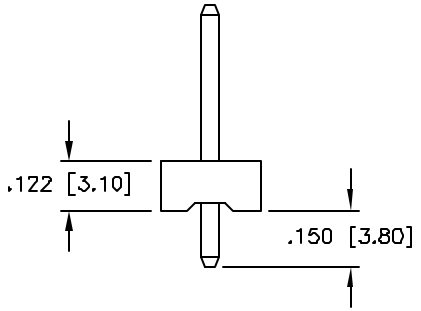

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-2
Insulator color: White
Contacts: Brass
Plating:
Tin over Copper underplate overall
Electrical:
Operating voltage: 250 VAC max
Current rating: 5 Amps max
Contact resistance: 10 mohms max
Insulation resistance: 1,000 Mohms min
Dielectric withstanding voltage: 1,500 VAC for 1 minute
Temperature Rating:
Operating temperature: -25°C to +85°C
Environmental:
Lead free, RoHS compliant
Recommended soldering temp: 230°C for 5 seconds

RoHS COMPLIANT

Positions: 2 thru 20
A = .156 [3.96] x No. of Positions + .012 [0.30]
B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	SS	4/12/05
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .156 [3.96] POWER HEADER STRAIGHT, WITHOUT LOCK POLARIZER

SIZE	PART NO.	REV.
X	LHB-XX-SA2	-

REF: | SCALE: NTS | SHEET 1 OF 1