



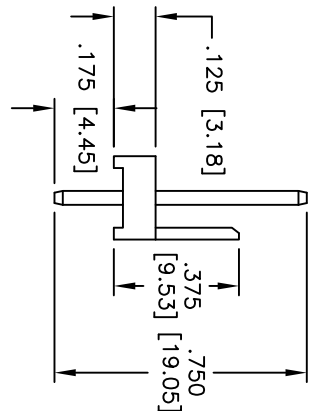


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/06/11	

APPROVED: _____

DATE: _____ TITLE: _____

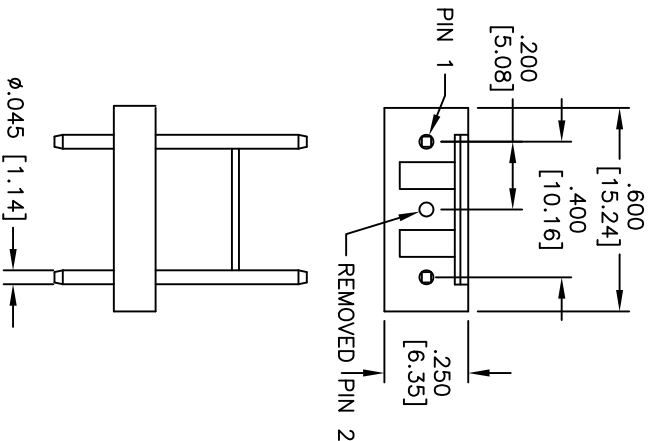

RECOMMENDED PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: Nylon 66, rated UL 94V-2

Insulator color: Natural

Contacts: Brass

Plating:

Tin over Nickel underplate overall

Electrical:

Operating voltage: 250V AC/DC

Current rating: 3A AC/DC

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.200 [5.08] WIRE TO BOARD, STRAIGHT
ROUND PINS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES .X ± .10 .XX ± .020 .XXX ± .015 APPROVALS DRAWN DY CHECKED APPROVED				Holes ØX ± .10 ØXXX ± .015 ØXXX ± .010 DATE 1/06/11			
SIZE X				PART NO. LHN-03-TS-RP-X02			
REF: S00123T				SCALE: NTS			
				SHEET 1 OF 1			